



Product Catalogue



SUTRADO
KABEL

Quality
through excellence

Content

CONTENT	04
---------	----

COMPANY PROFILE		
ABOUT US		06 - 07
VISION & MISSION		08 - 09
QUALITY		10 - 11

CONDUCTORS			13
Square Copper Busbar	SNI 8760 ; ASTM B187 ; JIS H3140 ; DIN EN 13601		14 - 15
Full Round Copper Busbar	SNI 8760 ; ASTM B187 ; JIS H3140 ; DIN EN 13601		16 - 17
Grounding Rod	Manufacturing Specification		18 - 19
Bare Copper Conductor Hard (BC-H) & (BC-1/2H)	SPLN 41-4:1981 ; SPLN 41-5:1981 ; BS 7884		20 - 21

LOW VOLTAGE POWER CABLES			23
NYA	IEC 60227 ; SNI 04-6629.3 ; 450/750 V		24 - 25
NAYA	IEC 60227 ; SNI 04-6629.3 ; 450/750 V		24 - 25
NYM	IEC 60227 ; SNI 04-6629.4 ; 300/500 V		26 - 27
NYY	SNI IEC 60502-1 ; SPLN D3.010-2 ; IEC 60502-1 ; 0.6/1 (1.2) kV		28 - 29
N2XY	SPLN 43-6, SNI IEC 60502-1, IEC 60502-1 ; 0.6/1 (1.2) kV		30 - 31
NYSY	SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		32 - 33
NYCY	SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		34 - 35
NYBY	SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		36 - 37
NYRY & NYRGbY	SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		38 - 39
NYFGbY	SPLN D3.010-3 ; SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		40 - 41
NAYY	SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		42 - 43
NA2XY	SPLN 43-6 ; SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		44 - 45
NYAF	SNI 04-6629.3 ; IEC 60227 ; 450/750 V		46 - 47
NYMHY	IEC 60227 ; SNI 04-6629.5 ; 300/500 V		48 - 49
NYYHY	SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		48 - 49
FRC	SNI IEC 60502-1 ; IEC 60331 ; IEC 60502-1 ; 0.6/1 (1.2) kV		50 - 51
N2XRY & N2XRGbY	SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		52 - 53
NAYFGbY	SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		54 - 55
MC-HL XHHW-2	IEC 60502-1 ; ICEA S-95-568/NEMA WC70 ; 0.6/1 (1.2) kV		56 - 57

LOW VOLTAGE CONTROL CABLES			59
NYY	SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		58 - 59
NYRGbY	SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		60 - 61
NYFGbY	SNI IEC 60502-1 ; IEC 60502-1 ; 0.6/1 (1.2) kV		62 - 63

INSTRUMENT CABLES			67
Cu/PVC/ISCR/OSCR/PVC	BS-EN 50288-7 ; IEC 60332-3 ; IEC-60332-3 Cat.C ; 300/500 V		68 - 71
Cu/PVC/OSCR/PVC	BS-EN 50288-7 ; IEC 60332-3 ; IEC-60332-3 Cat.C ; 300/500 V		72 - 75
Cu/XLPE/ISCR/OSCR/PVC/SWA/PVC	BS-EN 50288-7 ; IEC 60332-3 ; IEC-60332-3 Cat.C ; 300/500 V		76 - 79
Cu/PVC/ISCR/OSCR/PVC/SWA/PVC	BS-EN 50288-7 ; IEC 60332-3 ; IEC-60332-3 Cat.C ; 300/500 V		80 - 83
LIYCY	VDE 0812 ; IEC 60332-3-24 ; 300/500 V		84 - 85
Cu/PVC/OSCR/CAA/PVC-FR	BS-EN 50228-7 ; ICEA S-73-532/NEMA WC57 ; IEC 60332-3-24 Cat.C ; 300/500 V		86 - 87

SOLAR CABLES		89
Solar Cable (PV) H1Z2Z2-K	BS EN 50618 ; TUV-2PFG1169 ; 1500 VDC	90 - 91

OVERHEAD CONDUCTOR & CABLES		92
AAC & AAAC	SPLN 41-6 ; SPLN 41-8	94 - 95
AAAC/S	SPLN 41-10	96 - 97
ACSR	SPLN 41-7:1981	98 - 99
ACSR	ASTM B232	100 - 101
ACSR / AS	IEC 61089 ; SPLN T3.001-1:2015	102 - 103
NFA2X-T	SPLN 42-10:1993 ; SPLN D3.010-1 ; 0.6/1 (1.2) kV	104 - 107
NF2X & NFA2X	SPLN D3.010-1:2014 ; SPLN 42-10 ; 0.6/1 (1.2) kV	108 - 109

COPPER MEDIUM VOLTAGE POWER CABLES		110
N2XSY	SNI IEC 60502-2 ; IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) ; 18/30(36) kV	112 - 113
N2XSEY	SNI IEC 60502-2 ; IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) ; 18/30(36) kV	114 - 115
N2XSEbY	SNI IEC 60502-2 ; IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) ; 18/30(36) kV	116 - 117
N2XSERGbY	SNI IEC 60502-2 ; IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) ; 18/30(36) kV	118 - 119
N2XSRY	SNI IEC 60502-2 ; IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) ; 18/30(36) kV	120 - 121
N2XSEFGbY	SNI IEC 60502-2 ; IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) ; 18/30(36) kV	122 - 123
N2XSEYBY	SPLN, 43 - 5, SNI IEC 60502-2, IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) kV	124 - 125
N2XSEYFGbY	SPLN, 43 - 5, SNI IEC 60502-2, IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) kV	126 - 127
Type MV MC-HL	IEC 60502-2 ; ICEA S-93-639/NEMA WC74 ; UL 1072 ; 5 kV	128 - 129
MV-90 / MV-105 MC-HL	IEC 60502-2 ; ICEA S-93-639/NEMA WC74 ; UL 1072 ; 15 kV	130 - 131

ALUMINIUM MEDIUM VOLTAGE POWER CABLES		132
NA2XSY	SNI IEC 60502-2, IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) ; 18/30(36) kV	134 - 135
NA2XSEY	SNI IEC 60502-2 ; IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) ; 18/30(36) kV	136 - 137
NA2XSEbY	SNI IEC 60502-2 ; IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) ; 18/30(36) kV	138 - 139
NA2XSERGbY	SNI IEC 60502-2 ; IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) ; 18/30(36) kV	140 - 141
NA2XSRY	SNI IEC 60502-2 ; IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) ; 18/30(36) kV	142 - 143
NA2XSEFGbY	SNI IEC 60502-2 ; IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) ; 18/30(36) kV	144 - 145
NA2XSEYbY	SPLN 43-5, SNI IEC 60502-2, IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) kV	146 - 147
NA2XSEYFGbY	SPLN 43-5, SNI IEC 60502-2, IEC 60502-2 ; 3.6/6(7.2) ; 6/10(12) ; 8.7/15(17.5) ; 12/20(24) kV	148 - 149

MEDIUM VOLTAGE TWISTED CABLES		150
NF2XSY & NFA2XSY	SPLN 43-5, SNI IEC 60502-2, IEC 60502-2 ; 12/20(24) kV	152 - 153
NFA2XSY-T	SPLN 43-5, SNI IEC 60502-2, IEC 60502-2 ; 12/20(24) kV	154 - 155

HIGH VOLTAGE CABLES		156
N2XCK2Y & NA2XCK2Y	IEC 60840 ; 87/150 (170) kV	158 - 161
Cu/XLPE/CWS/CAA/HDPE AI/XLPE/CWS/CAA/HDPE	IEC 60840 ; 87/150 (170) kV	162 - 165

INSTALATION GUIDE		166
-------------------	--	-----





About Us

**A well-established and reliable name
in the manufacture and distribution of
high-quality wires and cables.**

PT. Sutrakabel Intimandiri (SUTRADO Kabel) is a premier cable manufacturer in Indonesia offering an extensive range of high quality products and superior after sales services. Supported by a dedicated team of professionals, SUTRADO Kabel is continuously improving its quality and services excellence for customer satisfaction.

We set high standards in everything we do and determine to bring the best quality and services in the cable industry. Building a strong relationship with our customer is our priority and we are committed to deliver the quality and convenience that our customer deserves.

Continuously growing since our establishment in 1991, we have gained recognition within the industry as a reliable and trusted cable manufacturer for a large number of customers from domestic market that includes reputable state owned enterprises, such as PT. PLN (Electricity) and PT. Pertamina (Oil and Gas), as well as international customers from countries, such as United States, Myanmar, Iraq, Mozambique, East Timor and many others.

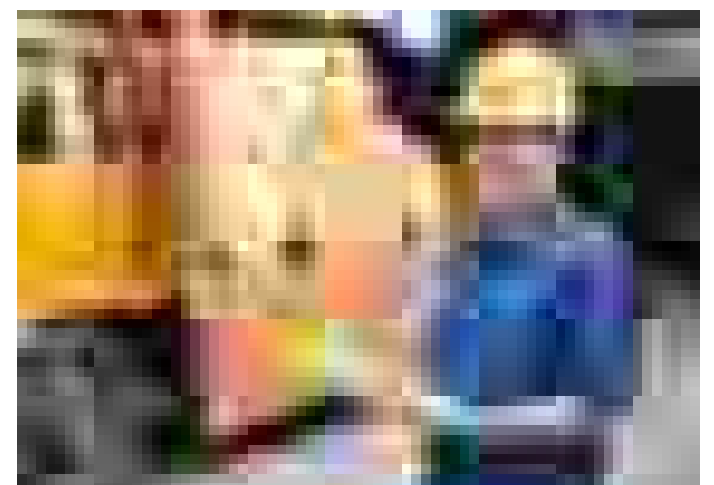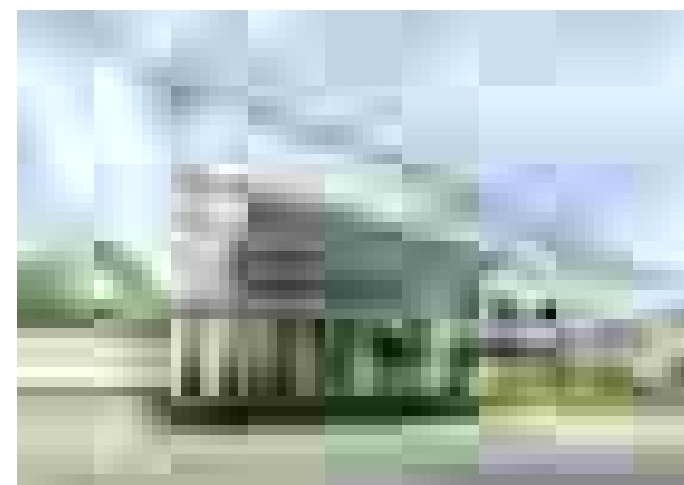

A worker in a blue shirt and safety glasses is working on a large industrial cable spool. The background is a blurred industrial setting with various cables and machinery.

Vision & Mission

Vision :

To become the largest electrical cable manufacturer in Indonesia by 2030 and to be a competitive product in the global market.

Mission :

1. To deliver high-quality products with competitive pricing and on-time delivery, fully aligned with customer requirements.
2. To continuously develop a highly competent and professional workforce.
3. To ensure the reliable supply of materials that meet quality, quantity, and cost-effectiveness standards as required by customers.
4. To invest in advanced technology and enhance production efficiency.
5. To strengthen the Sutrado Kabel brand image through the implementation of internationally recognized management systems.



Quality

In achieving a standard of excellence in delivering products and services, SUTRADO Kabel continues implementing quality management system and obtaining certifications for domestic and international standards.




Our company is certified with ISO 9001 for quality excellence, ISO 14001 for our commitment in environmental management and ISO 45001 for controlling and improving health and safety performance.


All products are manufactured using the latest technology, designed according to the applicable standards and requirements, and developed by trained and professional people to ensure our customer satisfaction.

Our cables are manufactured in accordance to the SPLN LMK or SNI (Indonesian standards), as well as conforming to the standards as follow:


- IEC** : International Electrotechnical Commission
- ASTM** : American Society for Testing and Materials
- BS** : British Standards
- NEMA** : National Electrical Manufacturers Association
- JIS** : Japanese Industrial Standards
- DIN** : Deutsches Institut für Normung
- ICEA** : Insulated Cable Engineers Association
- VDE** : Verband der Elektrotechnik, Elektronik und Informationstechnik
- SABS** : South African Bureau of Standards
- NF** : Norme Française

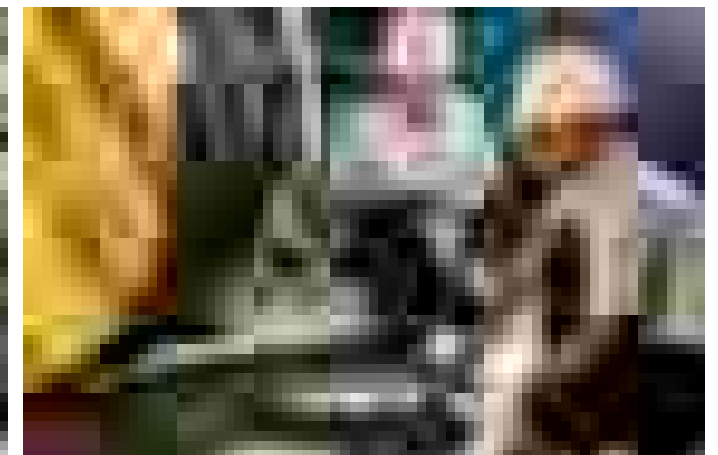

CONDUCTORS

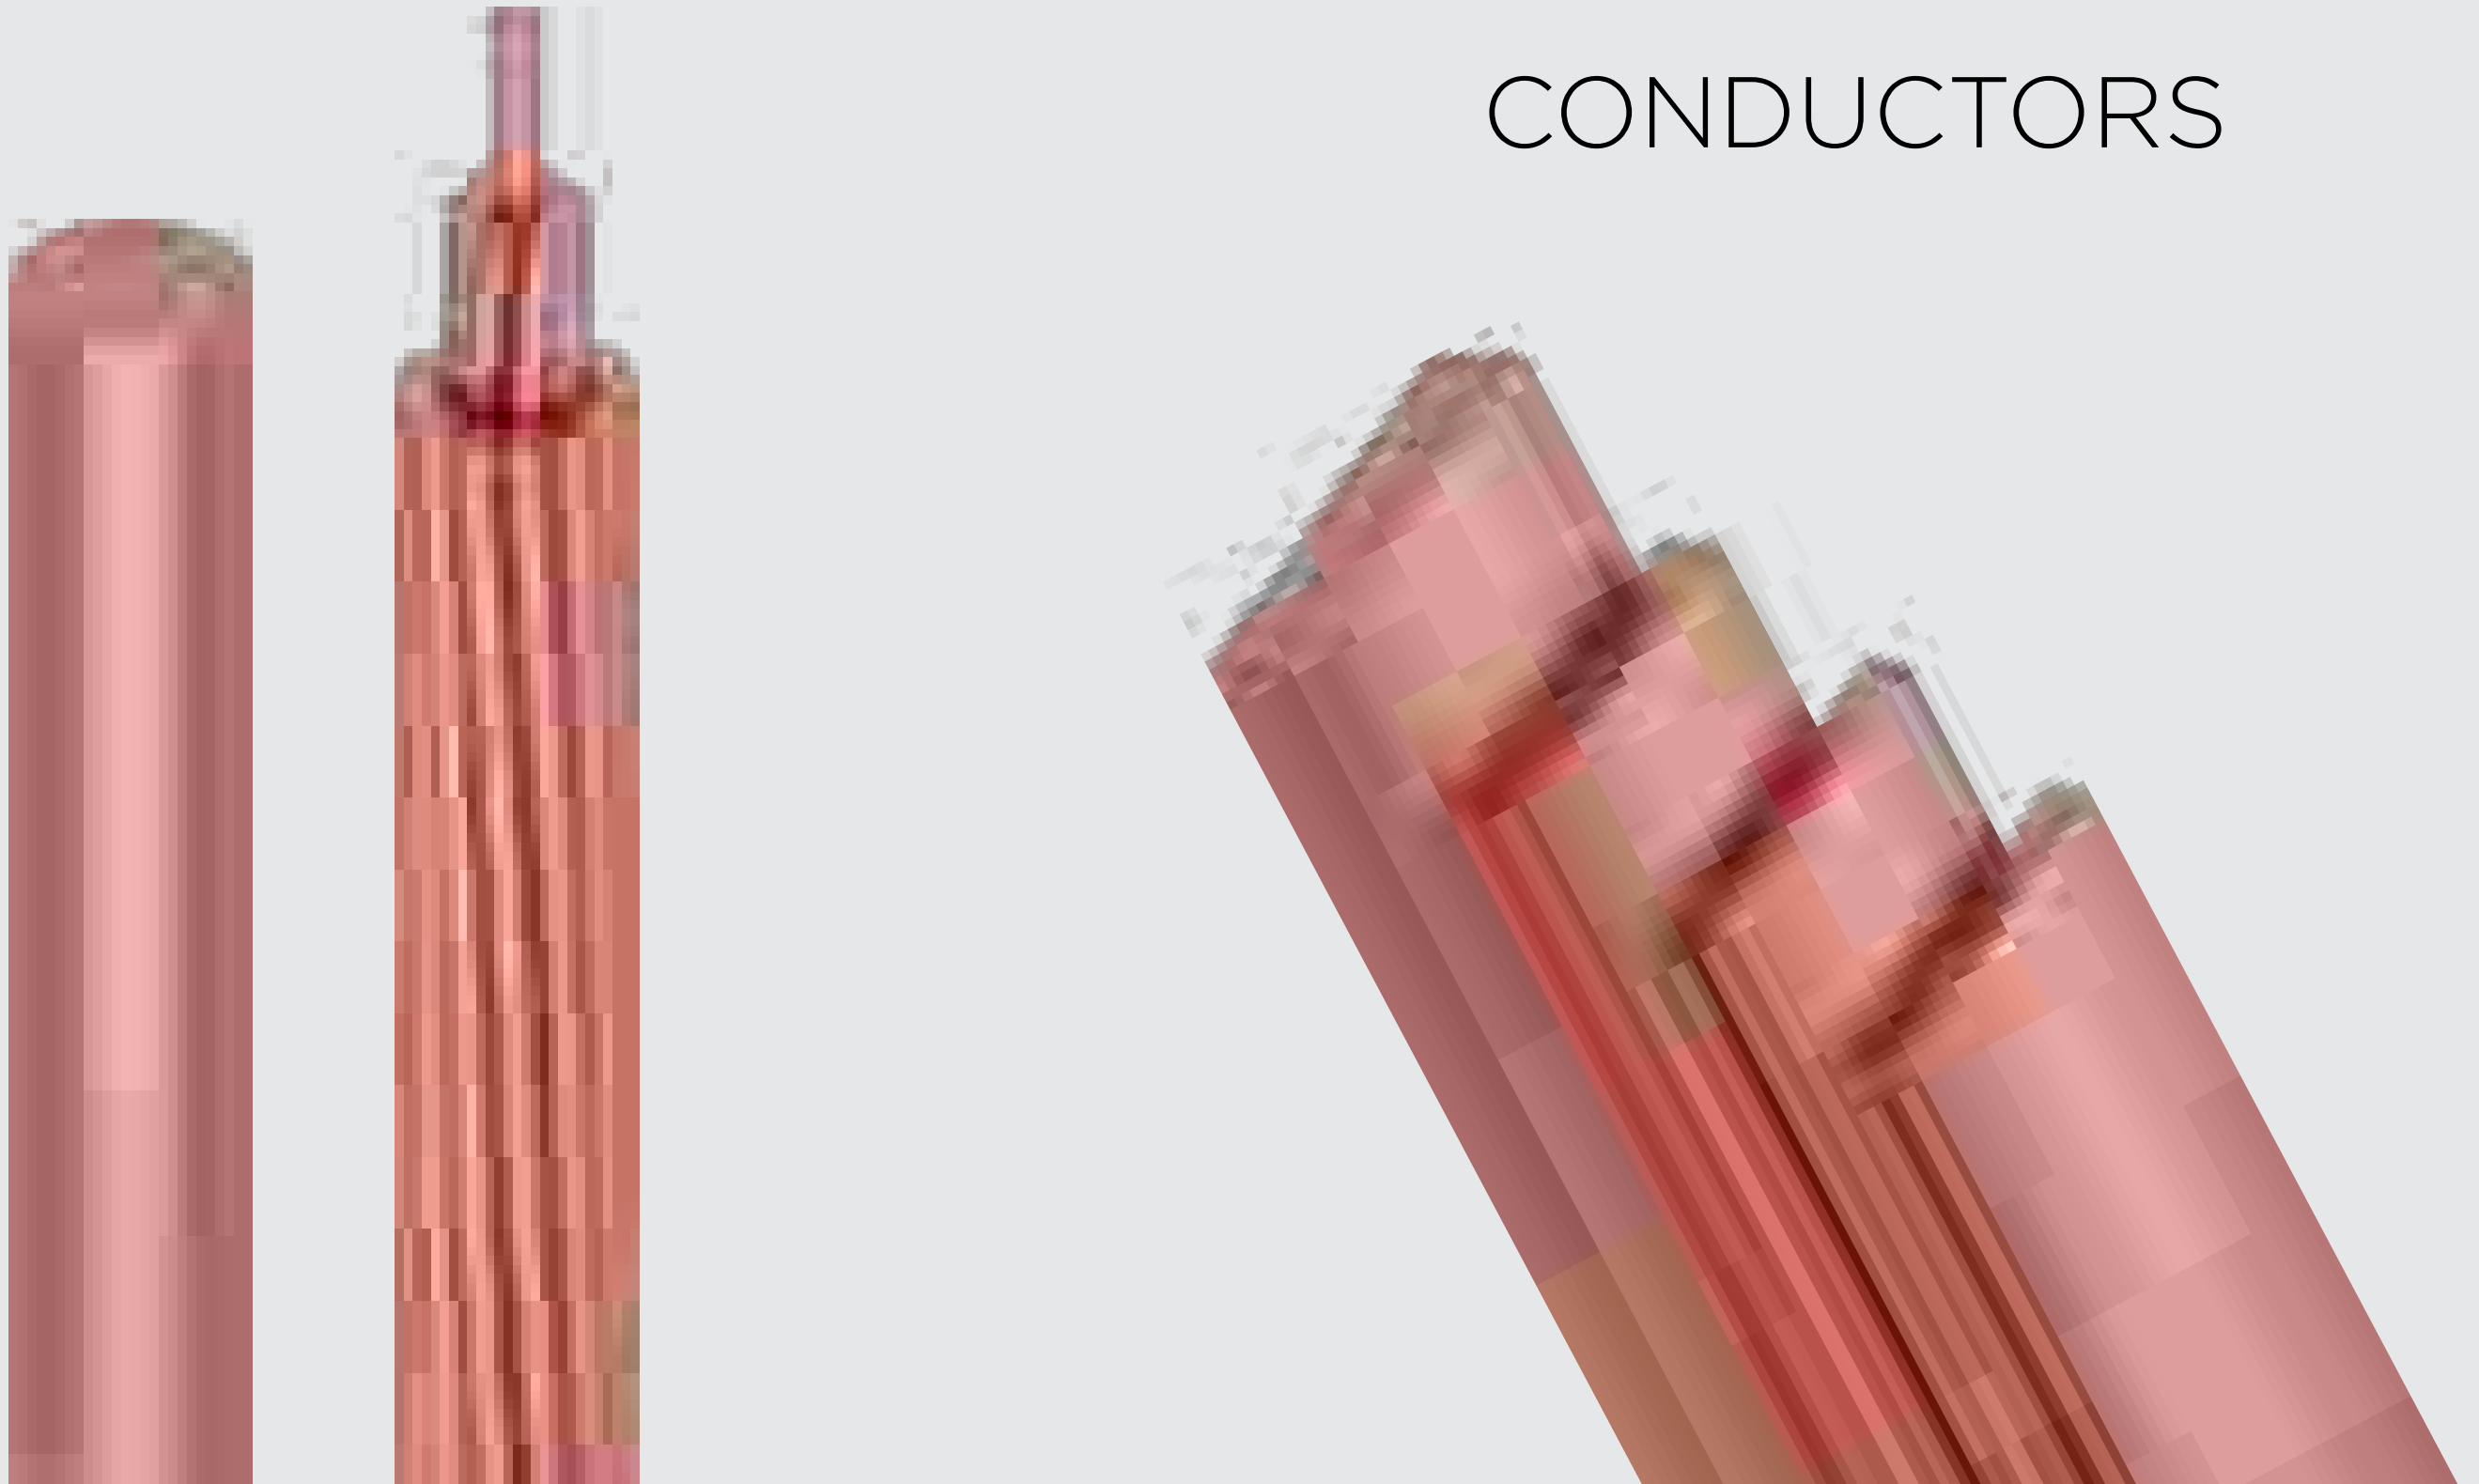

Square Copper Busbar

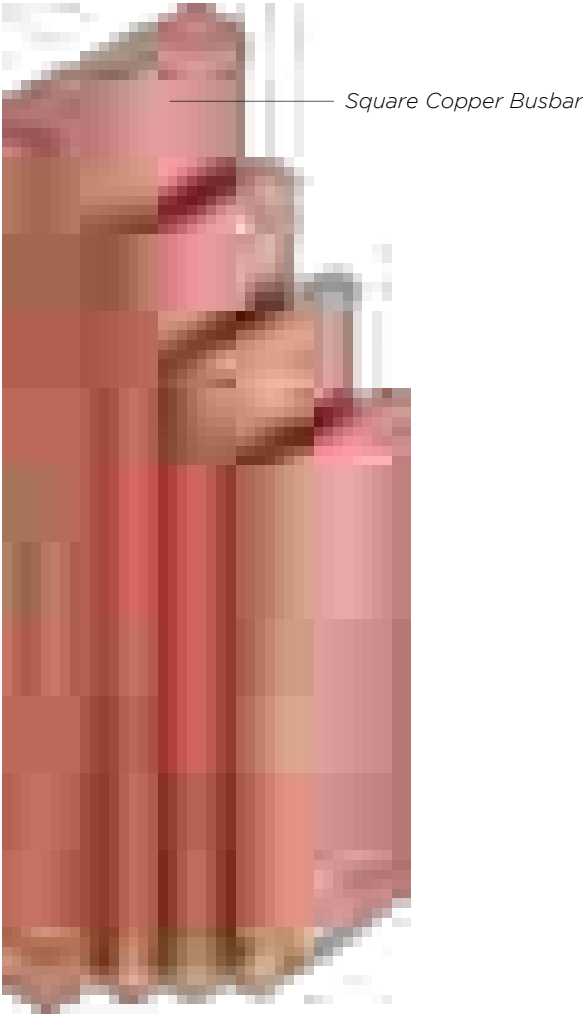

Application

- **SQUARE COPPER BUSBAR :**
Used for Switchboard, distribution board

Specification

- **SQUARE :**
SNI 8760, ASTM B187 , JIS H3140, DIN EN 13601
(Other specifications are available upon request)


Construction

- **SQUARE :** Flat Copper

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES								
Size			Approx DC Resistance 20 Ω/m	Approximate Weight (kg)	Current Carrying Capacity at 30°C (A)								Max. Short Circuit Current at 1 Second
					No of Bus (AC Sistem)				No of Bus (DC Sistem)				
mm	x	mm		4m	I	II	III	IIII	I	II	III	IIII	kA
2	x	15	558.82	1.07	152	207	-	-	152	257	-	-	3.1
2	x	25	335.74	1.80	239	440	-	-	222	408	-	-	5.1
3	x	15	375.60	1.57	184	309	-	-	184	320	-	-	4.6
3	x	16	352.20	1.68	199	367	-	-	185	340	-	-	4.9
3	x	20	281.93	2.11	260	380	-	-	260	451	-	-	6.1
3	x	25	225.66	2.66	315	461	722	943	315	538	830	1088	7.7
3	x	30	188.11	3.20	365	540	800	1050	365	639	935	1232	9.2
3	x	40	141.14	4.29	470	710	990	1260	470	809	1104	1410	12.3
3	x	50	112.94	5.38	575	1058	1484	1933	534	982	1377	1793	15.3
4	x	15	282.86	2.05	231	425	596	776	214	394	553	720	6.1
4	x	20	212.32	2.77	305	490	710	950	305	565	813	1079	8.2
4	x	25	169.94	3.50	365	600	850	1125	365	690	981	1289	10.2
4	x	30	141.67	4.22	430	690	1000	1300	430	792	1137	1482	12.3
4	x	40	106.29	5.67	545	880	1260	1640	545	990	1413	1857	16.4
4	x	50	85.06	7.11	665	1060	1450	1830	665	1152	1579	2022	20.4
5	x	20	170.28	3.42	345	500	800	1090	345	587	932	1265	10.2
5	x	25	136.29	4.32	415	600	970	1290	415	713	1146	1531	12.8
5	x	30	113.61	5.23	485	700	1090	1470	485	852	1301	1774	15.3
5	x	40	85.24	7.03	615	907	1351	1785	615	1079	1555	2112	20.4
5	x	50	68.21	8.83	745	1107	1661	2114	745	1318	1954	2522	25.6
5	x	60	56.85	10.64	870	1257	1810	2424	870	1450	2075	2805	30.7
5	x	63	54.15	11.18	945	1738	2437	3174	877	1613	2262	2946	32.2
5	x	80	42.65	14.24	1000	1753	2351	3041	1000	1800	2480	3170	40.9
5	x	100	34.12	17.85	1470	2704	3792	4938	1364	2510	3519	4583	51.1
5	x	125	27.30	22.36	1824	3356	4706	6129	1693	3115	4367	5688	63.9
6	x	25	113.76	5.13	460	610	1110	1320	460	713	1288	1547	15.3
6	x	30	94.83	6.21	535	700	1170	1520	535	1013	1372	1850	18.4
6	x	40	71.15	8.37	680	856	1501	1964	680	1249	1694	2296	24.5
6	x	50	56.94	10.54	825	1020	1760	2300	825	1494	2063	2687	30.7
6	x	60	47.46	12.70	965	1354	2071	2637	965	1750	2457	3164	36.8
6	x	80	35.60	17.02	982	1807	2533	3299	911	1677	2351	3061	49.1
6	x	100	28.48	21.34	1490	2316	3040	3836	1490	2876	3812	5175	61.3
8	x	20	106.82	5.27	447	822	1153	1501	415	763	1070	1393	16.4
8	x	30	71.27	8.14	630	820	1420	1900	630	1189	1603	2155	24.5
8	x	40	53.48	11.02	800	1026	1761	2395	800	1493	2033	2711	32.7
8	x	50	42.79	13.89	965	1188	2133	2753	965	1775	2474	3228	40.9
8	x	60	35.67	16.77	881	1622	2274	2962	818	1505	2110	2748	49.1
8	x	80	26.76	22.52	1164	2141	3003	3910	1080	1987	2786	3629	65.4
8	x	100	21.41	28.27	1735	2817	3601	4487	1735	3099	4256	5663	81.8
10	x	20	85.56	6.42	389	715	1002	1306	361	663	930	1212	20.4
10	x	25	68.48	8.22	468	861	1207	1572	434	799	1120	1459	25.6
10	x	30	57.09	10.01	720	792	1625	2222	720	1385	1905	2437	30.7
10	x	40	42.83	13.60	910	1396	1913	2585	910	1655	2364	3191	40.9
10	x	50	34.28	17.19	1090	1645	2314	3085	1090	1930	2839	3747	51.1
10	x	60	28.57	20.78	1270	2011	2752	3704	1270	2309	3233	4156	61.3
10	x	63	27.21	21.86	1400	2575	3611	4703	1299	2390	3351	4364	64.4
10	x	80	21.43	27.96	1615	2436	3283	4448	1615	2896	4121	5346	81.8
10	x	100	17.15	35.14	1950	3033	3954	5417	1950	3467	4875	6283	102.2
10	x	120	14.29	42.32	2285	3373	4461	6202	2285	3932	5527	7121	122.7
10	x	125	13.72	44.12	1984	3650	5118	6665	1841	3387	4749	6185	127.8
10	x	150	11.43	53.09	2730	4160	5643	7800	2730	4830	7035	9240	153.3
10	x	160	10.72	56.68	2930	4361	5927	8164	2930	5023	7220	9418	163.6
10	x	200	8.58	71.04	3550	5370	7179	9949	3550	6265	8875	10441	204.4
12	x	63	22.69	26.03	1170	2153	3019	3931	1086	1998	2801	3648	77.3
12	x	80	17.87	33.34	1936	3562	4995	6505	1797	3306	4636	6037	98.1
12	x	100	14.30	41.95	2377	4373	6132	7986	2206	4059	5691	7411	122.7

*Further information about derating factors for arrangement can be found on supplementary technical information.
*Other Size base on Request Client.

Full Round Copper Busbar

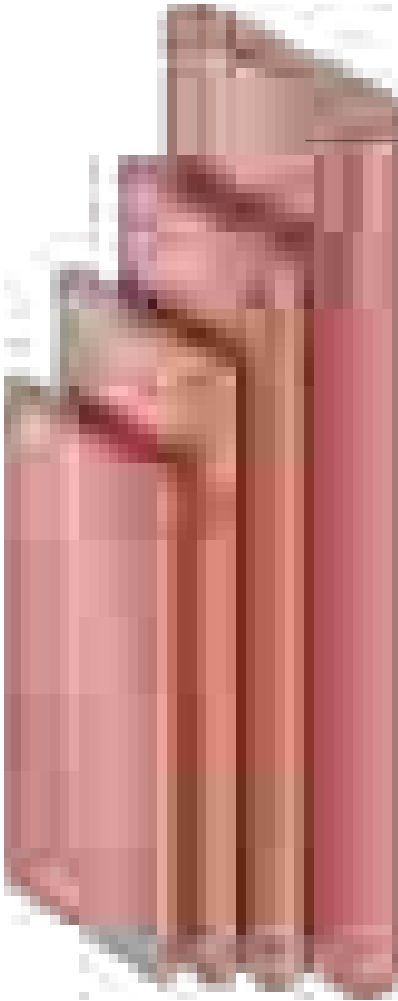

Full Round Copper Busbar

Application

- FULL ROUND COPPER BUSBAR :**
Used for Switchboard, distribution board

Specification

- FULL ROUND :**
SNI 8760, ASTM B187 , JIS H3140, DIN EN 13601
(Other specifications are available upon request)


Construction

- FULL ROUND :** Flat Copper

Physical Properties					Electrical Properties								
Size			Approx DC Resistance 20 Ω/m	Approximate Weight (kg)	Current Carrying Capacity at 30°C (A)								Max. Short Circuit Current at 1 Second
					No of Bus (AC Sistem)				No of Bus (DC Sistem)				
mm	x	mm		4m	I	II	III	IIII	I	II	III	IIII	kA
2	x	15	575.65	1.05	152	207	-	-	152	257	-	-	3.1
2	x	25	341.74	1.76	239	440	-	-	222	408	-	-	5.2
3	x	15	392.68	1.54	184	309	-	-	184	320	-	-	4.5
3	x	16	36717	1.65	199	367	-	-	185	340	-	-	4.8
3	x	20	291.45	2.08	260	380	-	-	260	451	-	-	6
3	x	25	231.71	2.62	315	461	722	943	315	538	830	1088	7.6
3	x	30	192.30	3.15	365	540	800	1050	365	639	935	1232	9.2
3	x	40	143.49	4.22	470	710	990	1260	470	809	1104	1410	12.3
3	x	50	114.44	5.29	575	1058	1484	1933	534	982	1377	1793	15.4
4	x	20	221.94	2.74	305	490	710	950	305	565	813	1079	7.9
4	x	25	176.05	3.45	365	600	850	1125	365	690	981	1289	10
4	x	30	145.88	4.17	430	690	1000	1300	430	792	1137	1482	12.1
4	x	40	108.65	5.60	545	880	1260	1640	545	990	1413	1857	16.2
4	x	50	86.56	7.03	665	1060	1450	1830	665	1152	1579	2022	20.4
5	x	20	180.01	3.39	345	500	800	1090	345	587	932	1265	9.8
5	x	25	142.45	4.28	415	600	970	1290	415	713	1146	1531	12.4
5	x	30	117.86	5.17	485	700	1090	1470	485	852	1301	1774	15
5	x	40	87.62	6.96	615	907	1351	1785	615	1079	1555	2112	20.1
5	x	50	69.72	8.74	745	1107	1661	2114	745	1318	1954	2522	25.3
5	x	60	57.90	10.53	870	1257	1810	2424	870	1450	2075	2805	30.4
5	x	63	55.10	11.07	945	1738	2437	3174	877	1613	2262	2946	32
5	x	80	43.23	14.10	1000	1753	2351	3041	1000	1800	2480	3170	40.8
5	x	100	34.50	17.67	1470	2704	3792	4938	1364	2510	3519	4583	51.1
5	x	125	27.54	22.14	1824	3356	4706	6129	1693	3115	4367	5688	64
6	x	25	119.98	5.09	460	610	1110	1320	460	713	1288	1547	14.7
6	x	30	99.12	6.16	535	700	1170	1520	535	1013	1372	1850	17.8
6	x	40	73.54	8.30	680	856	1501	1964	680	1249	1694	2296	24
6	x	50	58.45	10.45	825	1020	1760	2300	825	1494	2063	2687	30.2
6	x	60	48.51	12.59	965	1354	2071	2637	965	1750	2457	3164	36.3
6	x	80	36.19	16.87	982	1807	2533	3299	911	1677	2351	3061	48.7
6	x	100	28.86	21.16	1490	2316	3040	3836	1490	2876	3812	5175	61.1
8	x	20	116.89	5.23	447	822	1153	1501	415	763	1070	1393	15.1
8	x	30	75.62	8.09	630	820	1420	1900	630	1189	1603	2155	23.3
8	x	40	55.89	10.94	800	1026	1761	2395	800	1493	2033	2711	31.5
8	x	50	44.32	13.80	965	1188	2133	2753	965	1775	2474	3228	39.8
8	x	60	36.72	16.66	881	1622	2274	2962	818	1505	2110	2748	48
8	x	100	21.78	28.09	1735	2817	3601	4487	1735	3099	4256	5663	80.9
10	x	20	95.88	6.38	389	715	1002	1306	361	663	930	1212	18.4
10	x	25	74.94	8.17	468	861	1207	1572	434	799	1120	1459	23.5
10	x	30	61.50	9.95	720	792	1625	2222	720	1385	1905	2437	28.7
10	x	40	45.27	13.53	910	1396	1913	2585	910	1655	2364	3191	38.9
10	x	50	35.82	17.10	1090	1645	2314	3085	1090	1930	2839	3747	49.2
10	x	60	29.63	20.67	1270	2011	2752	3704	1270	2309	3233	4156	59.5
10	x	63	28.17	21.74	1400	2575	3611	4703	1299	2390	3351	4364	62.6
10	x	80	22.02	27.81	1615	2436	3283	4448	1615	2896	4121	5346	80
10	x	100	17.52	34.96	1950	3033	3954	5417	1950	3467	4875	6283	100.6
10	x	120	14.55	42.10	2285	3373	4461	6202	2285	3932	5527	7121	121.1
10	x	125	13.96	43.89	1984	3650	5118	6665	1841	3387	4749	6185	126.3
10	x	150	11.60	52.82	2730	4160	5643	7800	2730	4830	7035	9240	151.9
10	x	160	10.87	56.39	2930	4361	5927	8164	2930	5023	7220	9418	162.2
10	x	200	8.67	70.68	3550	5370	7179	9949	3550	6265	8875	10441	203.3
12	x	63	23.66	25.91	1170	2153	3019	3931	1086	1998	2801	3648	74.5
12	x	80	18.47	33.19	1936	3562	4995	6505	1797	3306	4636	6037	95.4
12	x	100	14.68	41.77	2377	4373	6132	7986	2206	4059	5691	7411	120.1

*Further information about derating factors for arrangement can be found on supplementary technical information.
*Other Size base on Request Client.

Grounding Rod



Round Solid Copper

Application

- **GROUNDING ROD :**
Used for grounding

Specification

- **GROUNDING ROD :**
Manufacturing Specification
(Other specifications are available upon request)

Construction


- **GROUNDING ROD :** Solid Copper

PHYSICAL PROPERTIES			ELECTRICAL PROPERTIES			
Size		No. of Package	Approximate Weight for Various Length (kg)			
inch	mm		6 m	4 m	3 m	2 m
(3/8")	8.50	10	3.10	2.07	1.55	1.03
(3/8")	9.50	10	3.86	2.57	1.93	1.29
(1/2")	11.50	10	5.64	3.76	2.82	1.88
(1/2")	12.50	10	6.65	4.43	3.33	2.22
(1/2")	12.70	10	6.86	4.58	3.43	2.29
(5/8")	14.50	10	8.93	5.95	4.46	2.98
(5/8")	15.88	5	10.70	7.13	5.35	3.57
(5/8")	16.00	5	10.86	7.24	5.43	3.62
(3/4")	18.00	3	13.72	9.15	6.86	4.57
(3/4")	19.05	3	15.36	10.24	7.68	5.12
(1")	24.00	1	24.33	16.22	12.17	8.11
(1")	25.00	1	26.39	17.60	13.20	8.80
(1")	25.40	1	27.24	18.16	13.62	9.08
(1 1/4")	31.75	1	42.50	28.33	21.25	14.17
(1 1/2")	38.10	1	61.13	40.75	30.57	20.38
(1 3/4")	44.45	1	83.15	55.43	41.57	27.72
(2")	50.80	1	108.54	72.36	54.27	36.18
(2 1/2")	63.50	1	169.46	112.97	84.73	56.49
(3")	76.20	1	243.89	162.59	121.94	81.30

*Further information about derating factors for arrangement can be found on supplementary technical information.

Bare Copper Conductor Hard (BC-H)

Bare Copper Conductor (BC-1/2H)

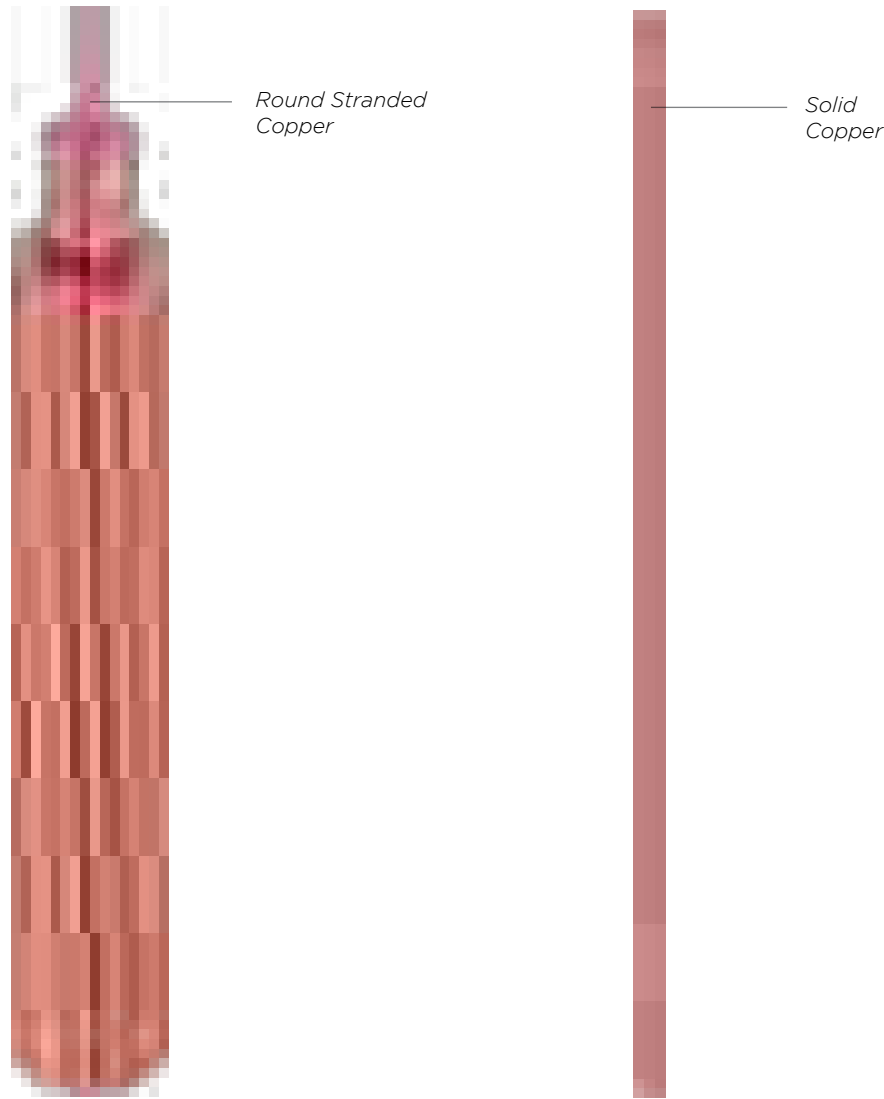

Application

Grounding Wire

Specification

- SPLN 41-4: 1981 41-5: 1981 , BS 7884
- (Other specifications are available upon request)

Construction

- Solid or Stranded Bare Copper

Physical Properties					Electrical Properties								
Cross Sectional Area		No. of Wire	Approx. Overall Diameter	Approx. Net Weight	Max. DC. Resistance at 20°C		Calculated Breaking Force		Standard Weight	Max Short Cirucit at 1 second		Current Carring Capacity	
Nominal Size	Actual Size				Hard	1/2 Hard	Hard	1/2 Hard		Hard	1/2 Hard	Hard	1/2 Hard
mm²	mm²				ohm/km	ohm/km	N	N		kg	kA	kA	A
6	6.16	1	2.80	55	2.8994	2.8961	2,428	1,918	500	0.15	0.30	67	68
10	9.62	1	3.50	86	1.8565	1.8545	3,706	2,944	500	0.23	0.48	90	91
10	10.02	7	4.05	90	1.8181	1.8160	4,049	3,228	500	0.24	0.50	94	95
16	15.89	7	5.10	141	1.1456	1.1452	6,421	5,077	1000	0.38	0.79	126	127
25	24.25	7	6.30	220	0.7512	0.7504	9,668	7,661	1000	0.59	1.20	164	165
35	34.36	7	7.50	312	0.5302	0.5296	13,545	10,762	1000	0.83	1.70	205	207
50	48.36	19	9.00	439	0.3785	0.3781	19,281	15,407	1000	1.17	2.39	254	256
70	65.82	19	10.50	597	0.2781	0.2778	26,242	20,793	1000	1.59	3.25	309	312
95	93.27	19	12.50	846	0.1963	0.1961	36,767	29,212	1000	2.25	4.61	385	389
120	117.00	19	14.00	1,061	0.1565	0.1563	46,121	36,434	1000	2.83	5.78	444	448
150	147.10	37	15.75	1,334	0.1244	0.1243	58,649	46,337	1000	3.55	7.27	513	518
185	181.60	37	17.50	1,647	0.1008	0.1007	71,587	56,887	1000	4.39	8.98	586	592
240	242.50	61	20.25	2,200	0.0755	0.0754	96,685	76,388	1000	5.86	11.99	703	710
300	299.40	61	22.50	2,716	0.0611	0.0611	118,023	93,772	1000	7.23	14.80	801	809
400	400.10	61	26.00	3,629	0.0458	0.0457	157,719	124,231	1000	9.66	19.78	957	967
500	499.10	61	29.10	4,533	0.0367	0.0366	194,050	154,072	1000	12.07	24.70	1080	1092

*Further information about derating factors for arrangement can be found on supplementary technical information.



LOW VOLTAGE POWER CABLES



450/750 V, NYA (Cu/PVC)


(Copper Conductor, PVC Insulated)

450/750 V, NAYA (Al/PVC)

(Aluminium Conductor, PVC Insulated)

Standard Specification : SNI 04-6629.3, IEC 60227

*For Insulation colour can be based on Customer Request or Follow Standard.

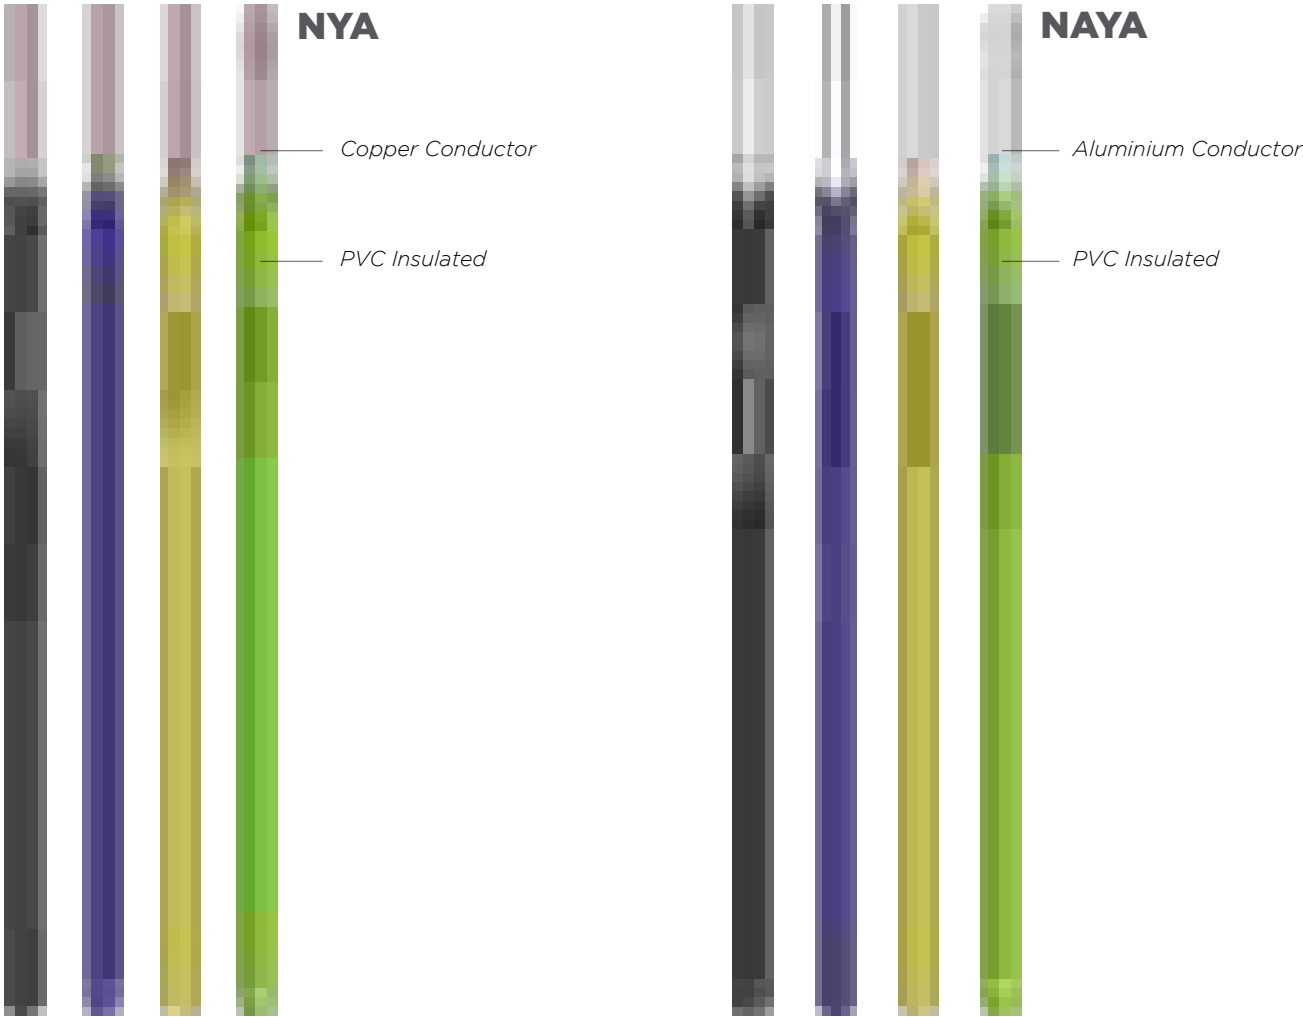

Application

For building wire installed in conduit in dry location and inter wiring in switchboard and control panel.

Special Features on Request

- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category

Standard Packing

- 1.5 - 16 sqmm supplied in coil @ 100 meters
- 25 - 400 sqmm supplied in wooden drum @ 1000 meters
- Length Tolerance per drum ± 2%

Note : Conductor Shape

- 1.5 - 10 sqmm supplied in solid (re) or non compacted circular stranded (rm) conductor shape
- 16 sqmm supplied in non compacted circular stranded (rm) conductor shape
- 25 - 400 sqmm supplied in non compacted circular stranded (rm)
- Other size and shape can be discussed

NYA											
PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES						
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		Min. Insulation Resistance at 70 °C	Inductance	Max. Current - Carrying Capacity at 30 °C *		Max. Short
					Max. DC Resistance at 20 °C	Max. AC Resistance at 70 °C			in air	in pipe	
mm²			mm	kg/km	ohm/km	ohm/km	M.ohm.km	mH/km	A	A	kA
1	x	1.5	3.06	22	12.100	14.478	0.010	0.407	26	24	0.21
1	x	2.5	3.68	34	7.410	8.866	0.009	0.394	35	32	0.36
1	x	4	4.19	49	4.610	5.516	0.008	0.369	45	41	0.57
1	x	6	4.76	70	3.080	3.685	0.007	0.349	57	51	0.86
1	x	10	6.06	115	1.830	2.190	0.007	0.345	79	69	1.43
1	x	16	7.11	174	1.150	1.376	0.005	0.326	104	90	2.29
1	x	25	8.77	270	0.727	0.870	0.005	0.322	137	118	3.58
1	x	35	9.91	366	0.524	0.627	0.004	0.311	167	142	5.01
1	x	50	11.65	493	0.387	0.464	0.004	0.310	202	171	7.15
1	x	70	13.40	690	0.268	0.321	0.004	0.299	251	211	10.01
1	x	95	15.65	950	0.193	0.232	0.003	0.297	306	256	13.59
1	x	120	17.23	1,179	0.153	0.184	0.003	0.291	351	293	17.16
1	x	150	19.17	1,456	0.124	0.150	0.003	0.292	398	-	21.45
1	x	185	21.39	1,817	0.099	0.121	0.003	0.291	455	-	26.46
1	x	240	24.39	2,382	0.075	0.093	0.003	0.289	533	-	34.32
1	x	300	27.13	2,967	0.060	0.075	0.003	0.288	605	-	42.90
1	x	400	30.05	3,656	0.047	0.060	0.003	0.287	690	-	57.20

*Further information about derating factors for arrangement can be found on supplementary technical information.


NAYA											
PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES						
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		Min. Insulation Resistance at 70 °C	Inductance	Max. Current - Carrying Capacity at 30 °C *		Max. Short Circuit current at 1 second
					Max. DC Resistance at 20 °C	Max. AC Resistance at 70 °C			in air	in pipe	
mm²			mm	kg/km	ohm/km	ohm/km	ohm.km	mH/km	A	A	kA
1	x	10	6.06	55	3.080	3.701	0.007	0.345	57	37	0.94
1	x	16	7.11	79	1.910	2.295	0.005	0.326	76	49	1.50
1	x	25	8.77	120	1.200	1.442	0.005	0.322	103	67	2.35
1	x	35	10.31	167	0.868	1.043	0.004	0.321	129	84	3.29
1	x	50	11.65	207	0.641	0.771	0.004	0.310	157	102	4.70
1	x	70	13.4	279	0.443	0.533	0.004	0.299	198	129	6.58
1	x	95	15.65	381	0.320	0.385	0.003	0.297	248	161	8.93
1	x	120	17.23	460	0.253	0.305	0.003	0.291	289	188	11.28
1	x	150	19.17	569	0.206	0.249	0.003	0.292	333	-	14.10
1	x	185	21.39	709	0.164	0.199	0.003	0.291	390	-	17.39
1	x	240	24.39	919	0.125	0.152	0.003	0.289	469	-	22.56
1	x	300	27.13	1,140	0.100	0.123	0.003	0.288	546	-	28.20
1	x	400	30.41	1,437	0.078	0.097	0.003	0.286	644	-	37.60

*Further information about derating factors for arrangement can be found on supplementary technical information.

300 / 500 V, NYM (Cu / PVC / PVC)

(Copper Conductor, PVC Insulated, PVC Sheathed)
Standard Specification : SNI 04 - 6629.4 & IEC 60227

**For Insulation colour can be based on Customer Request or Follow Standard.*

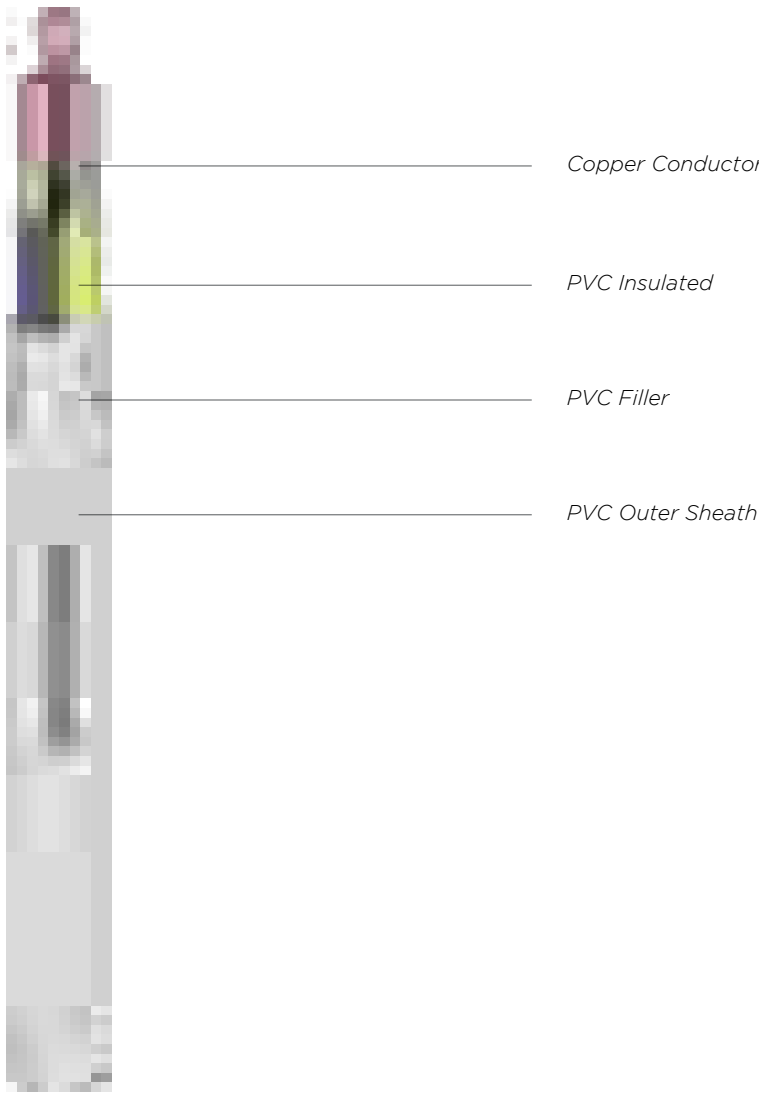

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES					
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		Min. Insulation Resistance at 70 °C	Max. Current - Carrying Capacity at 30 °C * in air		Max. Short Circuit current at 1 second
					Max. DC Resistance at 20 °C	Max. AC Resistance at 70 °C		in air	in pipe	
mm²			mm	kg/km	ohm/km	ohm/km	M.ohm.km	A	A	kA
2	x	1.5	9.52	133	12.100	14.478	0.010	26	18	0.21
2	x	2.5	10.82	180	7.410	8.866	0.009	34	24	0.36
2	x	4	11.90	231	4.610	5.516	0.008	45	32	0.57
2	x	6	13.04	294	3.080	3.685	0.007	57	40	0.86
2	x	10	16.50	479	1.830	2.190	0.007	81	57	1.43
2	x	16	18.42	637	1.150	1.376	0.005	107	75	2.29
2	x	25	22.20	954	0.727	0.870	0.005	145	102	3.58
2	x	35	25.22	1,265	0.524	0.627	0.004	179	125	5.01
3	x	1.5	9.99	152	12.100	14.478	0.010	21	15	0.21
3	x	2.5	11.40	209	7.410	8.866	0.009	29	20	0.36
3	x	4	12.56	274	4.610	5.516	0.008	38	26	0.57
3	x	6	14.19	368	3.080	3.685	0.007	48	34	0.86
3	x	10	17.26	576	1.830	2.190	0.007	67	47	1.43
3	x	16	19.92	824	1.150	1.376	0.005	90	63	2.29
3	x	25	23.90	1,227	0.727	0.870	0.005	121	85	3.58
3	x	35	26.76	1,614	0.524	0.627	0.004	150	105	5.01
4	x	1.5	10.79	184	12.100	14.478	0.010	19	13	0.21
4	x	2.5	12.36	256	7.410	8.866	0.009	26	18	0.36
4	x	4	14.06	353	4.610	5.516	0.008	34	24	0.57
4	x	6	15.84	475	3.080	3.685	0.007	43	30	0.86
4	x	10	19.05	727	1.830	2.190	0.007	61	42	1.43
4	x	16	21.76	1,016	1.150	1.376	0.005	81	57	2.29
4	x	25	26.64	1,559	0.727	0.870	0.005	110	77	3.58
4	x	35	29.32	2,009	0.524	0.627	0.004	135	94	5.01

**Further information about derating factors for arrangement can be found on supplementary technical information.*

Application

For building wire installed in conduit in dry location and inter wiring in switchboard and control panel.

Special Features on Request

- Anti Termite
- Anti Rodent
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category

Note : Conductor Shape

- 1.5 - 10 sqmm supplied in solid (re) or non compacted circular stranded (rm) conductor shape
- 16 - 35 sqmm supplied in non compacted circular stranded (rm) conductor shape
- Other size and shape can be discussed


Standard Packing

- 1.5 - 4 sqmm supplied in coil @ 100 meters or in wooden drum @ 1000/2000 meters
- 6 - 35 sqmm supplied in wooden drum @ 1000 meters
- Length Tolerance per drum ± 2%

0.6/1 (1.2) kV, NYSY (Cu / PVC / CTS / PVC)

(Copper Conductor, PVC Insulated, Copper Tape Screen, PVC Sheathed)
Standard Specification : SNI IEC 60502-1, IEC 60502-1

**For Insulation colour can be based on Customer Request or Follow Standard.*

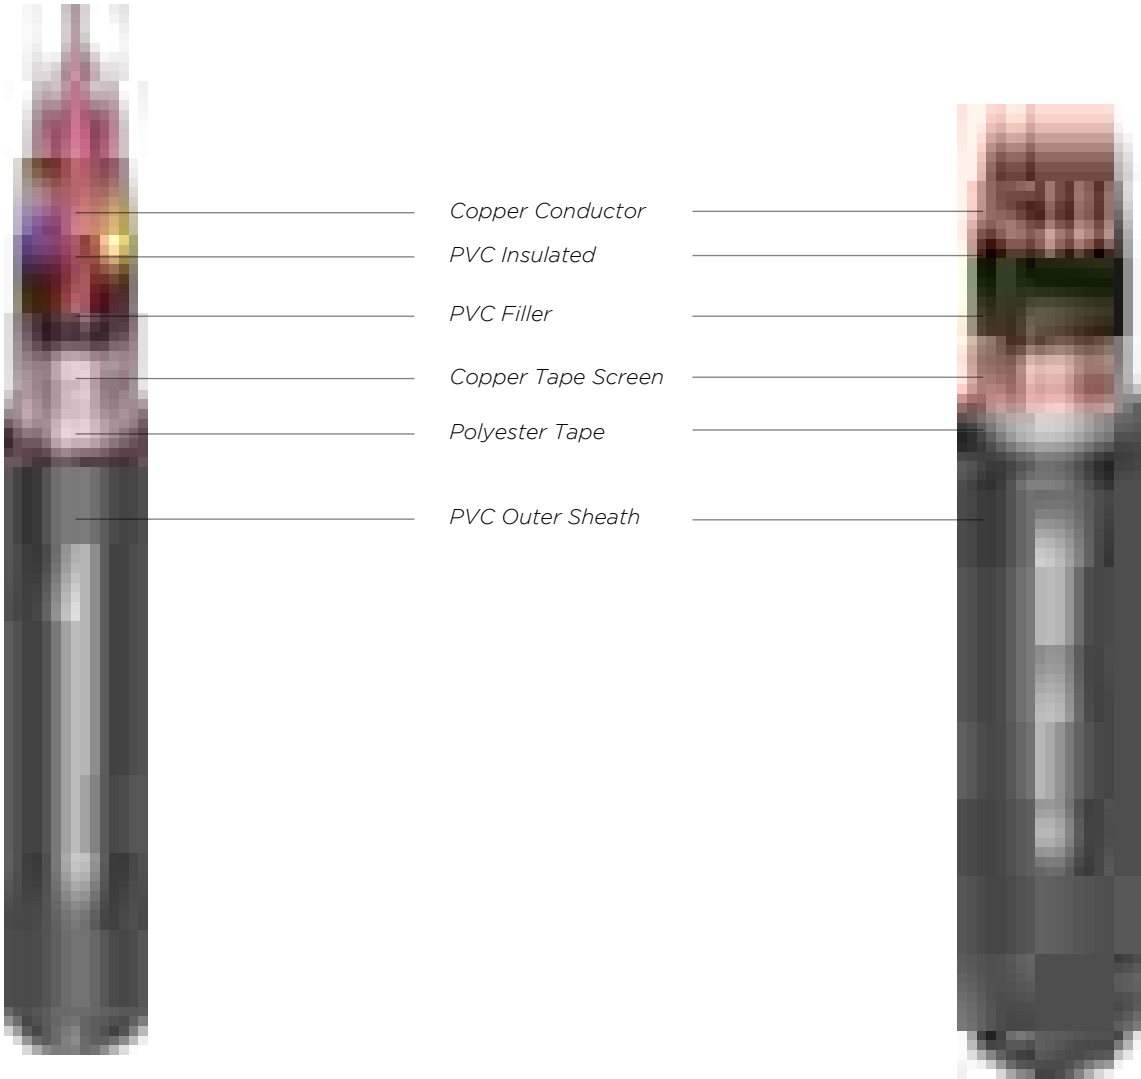

Application

For power plants and switchgear as well as for installation of sub-station; for installation indoors in confined spaces and cable channels because of small bending radius. As burried cable, because of its light weight preferred in where installation is difficult.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen

Note : Conductor Shape

- 1.5 - 10 sqmm supplied in solid (re) or non compacted circular stranded (rm) conductor shape.
- 16 sqmm supplied in non compacted circular stranded (rm) conductor shape
- 25 - 630 sqmm supplied in non compacted circular stranded (rm) or compacted circular stranded (cm) conductor shape
- Other size and shape can be discussed

Standard Packing

- Length Tolerance per drum ± 2%
- Wooden drum 500m, 1000m


Physical Properties				Electrical Properties									
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	X	C	Z	Max. Current - Carrying Capacity at 30 °C *		Max. Short Circuit Current at 1 Second
					Max. DC Resistance at 20 °C	Max. AC Resistance at 70 °C					in air	in ground	
mm²			mm	kg/km	ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	A	kA
1	x	1.5	10.80	162	12100	14.478	0.416	0.130	0.197	14.478	32	40	0.21
1	x	2.5	11.20	181	7410	8.866	0.387	0.121	0.235	8.867	41	52	0.36
1	x	4	12.10	219	4.610	5.516	0.386	0.121	0.236	5.517	54	67	0.57
1	x	6	12.70	252	3.080	3.685	0.364	0.114	0.276	3.687	67	83	0.86
1	X	10	13.60	311	1.830	2.190	0.341	0.107	0.340	2.192	90	109	1.43
2	x	1.5	14.00	281	12100	14.478	0.330	0.104	0.197	14.478	25	30	0.21
2	x	2.5	14.90	326	7410	8.866	0.307	0.096	0.235	8.867	33	39	0.36
2	x	4	16.70	420	4.610	5.516	0.307	0.096	0.236	5.517	44	51	0.57
2	x	6	17.80	499	3.080	3.685	0.289	0.091	0.276	3.686	56	63	0.86
2	x	10	19.60	641	1.830	2.190	0.270	0.085	0.340	2.191	75	83	1.43
3	x	1.5	14.50	310	12100	14.478	0.330	0.104	0.197	14.478	21	25	0.21
3	x	2.5	15.40	365	7410	8.866	0.307	0.096	0.235	8.867	27	32	0.36
3	x	4	17.40	478	4.610	5.516	0.307	0.096	0.236	5.517	37	42	0.57
3	x	6	18.60	578	3.080	3.685	0.289	0.091	0.276	3.686	46	52	0.86
3	x	10	20.60	760	1.830	2.190	0.270	0.085	0.340	2.191	63	68	1.43
4	x	1.5	15.40	350	12100	14.478	0.330	0.104	0.197	14.478	21	25	0.21
4	x	2.5	16.40	418	7410	8.866	0.307	0.096	0.235	8.867	28	33	0.36
4	x	4	18.60	555	4.610	5.516	0.307	0.096	0.236	5.517	38	42	0.57
4	x	6	20.00	679	3.080	3.685	0.289	0.091	0.276	3.686	48	52	0.86
4	x	10	22.10	906	1.830	2.190	0.270	0.085	0.340	2.191	65	69	1.43
5	x	1.5	16.70	382	12100	14.478	0.336	0.106	0.188	14.478	19	22	0.21
5	x	2.5	17.80	457	7410	8.866	0.313	0.098	0.224	8.867	25	29	0.36
7	x	1.5	17.70	450	12100	14.478	0.336	0.106	0.188	14.478	16	18	0.21
7	x	2.5	18.90	549	7410	8.866	0.313	0.098	0.224	8.867	21	24	0.36
9	x	1.5	19.70	540	12100	14.478	0.336	0.106	0.188	14.478	15	16	0.21
9	x	2.5	21.20	664	7410	8.866	0.313	0.098	0.224	8.867	19	21	0.36
11	x	1.5	21.10	617	12100	14.478	0.336	0.106	0.188	14.478	14	15	0.21
11	x	2.5	22.80	766	7410	8.866	0.313	0.098	0.224	8.867	18	19	0.36
13	x	1.5	22.30	690	12100	14.478	0.336	0.106	0.188	14.478	13	13	0.21
13	x	2.5	24.10	862	7410	8.866	0.313	0.098	0.224	8.867	17	17	0.36
15	x	1.5	23.20	757	12100	14.478	0.336	0.106	0.188	14.478	12	13	0.21
15	x	1.5	25.20	952	7410	8.866	0.313	0.098	0.224	8.867	16	16	0.36
20	x	1.5	25.20	917	12100	14.478	0.336	0.106	0.188	14.478	11	11	0.21
20	x	2.5	27.40	1170	7410	8.866	0.313	0.098	0.224	8.867	14	14	0.36
27	x	1.5	28.00	1143	12100	14.478	0.336	0.106	0.188	14.478	10	10	0.21
27	x	2.5	30.80	1489	7410	8.866	0.313	0.098	0.224	8.867	13	12	0.36

**Further information about derating factors for arrangement can be found on supplementary technical information.*

0.6/1 (1.2) kV, NYCY (Cu / PVC / CWS / PVC)

(Copper Conductor, PVC Insulated, Copper Wire Screen, PVC Sheathed)
Standard Specification : SNI IEC 60502-1, IEC 60502-1

**For Insulation colour can be based on Customer Request or Follow Standard.*

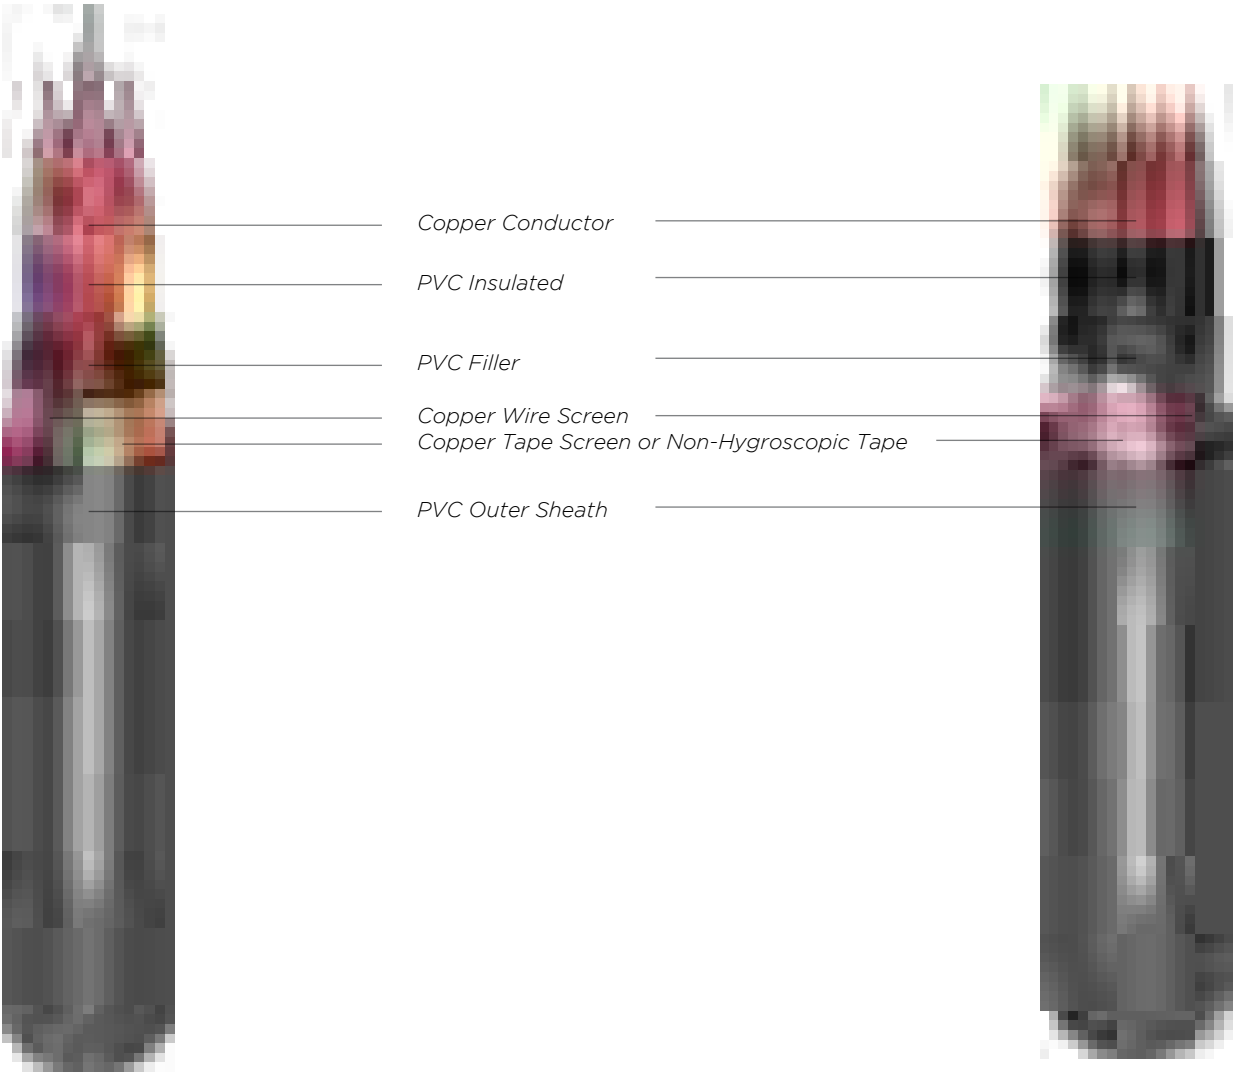

Application

For installation in the ground, indoors, cable trunking and outdoors if subsequent mechanical damage is likely, for urban networks, household feeder and street lighting.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen

Note : Conductor Shape

- 1.5 - 10 sqmm supplied in solid (re) or non compacted circular stranded (rm) conductor shape
- 16 sqmm supplied in non compacted circular stranded (rm) conductor shape
- 25 - 630 sqmm supplied in non compacted circular stranded (rm) or compacted circular stranded (cm) conductor shape
- Other size and shape can be discussed

Standard Packing

- Length Tolerance per drum ± 2%
- wooden drum 500m, 1000m


PHYSICAL PROPERTIES						ELECTRICAL PROPERTIES							
Nom Cross Section Area			Approx Overall Diameter	Approx. Cable Weight	Conductor		L	X	C	Z	Max. Current - Carrying Capacity at 30 °C *		Max. Short Circuit Current at 1 Second
					Max. DC Resistance at 20 °C	Max. AC Resistance at 70 °C					in air	in ground	
mm²			mm	kg/km	ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	A	kA
1	x	1.5	12.20	177	12.100	14.478	0.416	0.130	0.197	14.478	33	42	0.21
1	x	2.5	12.60	204	7.410	8.866	0.387	0.121	0.235	8.867	42	53	0.36
1	x	4	13.50	252	4.610	5.516	0.386	0.121	0.236	5.517	56	68	0.57
1	x	6	14.10	301	3.080	3.685	0.364	0.114	0.276	3.687	71	85	0.86
1	x	10	16.10	404	1.830	2.190	0.341	0.107	0.340	2.192	96	112	1.43
2	x	1.5	14.90	284	12.100	14.478	0.330	0.104	0.197	14.478	26	31	0.21
2	x	2.5	15.70	337	7.410	8.866	0.307	0.096	0.235	8.867	34	40	0.36
2	x	4	18.10	445	4.610	5.516	0.307	0.096	0.236	5.517	45	51	0.57
2	x	6	19.30	541	3.080	3.685	0.289	0.091	0.276	3.686	57	64	0.86
2	x	10	21.40	716	1.830	2.190	0.270	0.085	0.340	2.191	78	84	1.43
3	x	1.5	15.40	312	12.100	14.478	0.330	0.104	0.197	14.478	22	25	0.21
3	x	2.5	16.30	375	7.410	8.866	0.307	0.096	0.235	8.867	28	33	0.36
3	x	4	18.90	502	4.610	5.516	0.307	0.096	0.236	5.517	38	42	0.57
3	x	6	20.10	618	3.080	3.685	0.289	0.091	0.276	3.686	48	52	0.86
3	x	10	22.40	833	1.830	2.190	0.270	0.085	0.340	2.191	65	69	1.43
4	x	1.5	16.20	351	12.100	14.478	0.330	0.104	0.197	14.478	22	26	0.21
4	x	2.5	17.20	426	7.410	8.866	0.307	0.096	0.235	8.867	29	33	0.36
4	x	4	20.00	576	4.610	5.516	0.307	0.096	0.236	5.517	39	43	0.57
4	x	6	21.40	716	3.080	3.685	0.289	0.091	0.276	3.686	49	53	0.86
4	x	10	24.00	976	1.830	2.190	0.270	0.085	0.340	2.191	67	70	1.43
5	x	1.5	17.60	405	12.100	14.478	0.330	0.104	0.197	14.478	20	23	0.21
5	x	2.5	18.70	493	7.410	8.866	0.307	0.096	0.235	8.867	26	29	0.36
7	x	1.5	18.50	473	12.100	14.478	0.330	0.104	0.197	14.478	17	19	0.21
7	x	2.5	19.80	584	7.410	8.866	0.307	0.096	0.235	8.867	22	24	0.36
9	x	1.5	20.50	569	12.100	14.478	0.330	0.104	0.197	14.478	15	16	0.21
9	x	2.5	22.00	709	7.410	8.866	0.307	0.096	0.235	8.867	20	21	0.36
11	x	1.5	21.90	651	12.100	14.478	0.330	0.104	0.197	14.478	14	15	0.21
11	x	2.5	23.60	818	7.410	8.866	0.307	0.096	0.235	8.867	18	19	0.36
13	x	1.5	23.10	718	12.100	14.478	0.330	0.104	0.197	14.478	13	14	0.21
13	x	2.5	25.00	907	7.410	8.866	0.307	0.096	0.235	8.867	17	18	0.36
15	x	1.5	24.10	789	12.100	14.478	0.330	0.104	0.197	14.478	12	13	0.21
15	x	2.5	26.00	1,002	7.410	8.866	0.307	0.096	0.235	8.867	16	16	0.36
20	x	1.5	26.00	945	12.100	14.478	0.330	0.104	0.197	14.478	11	11	0.21
20	x	2.5	28.30	1,215	7.410	8.866	0.307	0.096	0.235	8.867	14	14	0.36
27	x	1.5	28.80	1,178	12.100	14.478	0.330	0.104	0.197	14.478	10	10	0.21
27	x	2.5	31.40	1,530	7.410	8.866	0.307	0.096	0.235	8.867	13	12	0.36

**Further information about derating factors for arrangement can be found on supplementary technical information.*

0.6/1 (1.2) kV, NYBY (Cu / PVC / DSTA / PVC)

(Copper Conductor, PVC Insulated, Double Steel Tape Armor, PVC Sheathed)
Standard Specification : SNI IEC 60502-1, IEC 60502-1

*For Insulation colour can be based on Customer Request or Follow Standard.

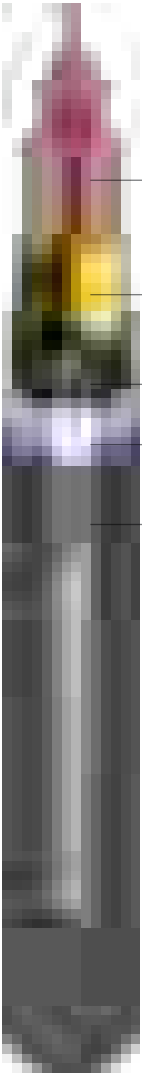

Copper Conductor

PVC Insulated

PVC Filler

Double Galvanized Steel Tape

PVC Outer Sheath

Application

For installation indoors, cable channels and in ground, for industry installations, switchgear, and power station, if there is a risk that low mechanical damage may occur.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen

Note : Conductor Shape

- 1.5 - 10 sqmm supplied in solid (re) or non compacted circular stranded (rm) conductor shape
- 16 sqmm supplied in non compacted circular stranded (rm) conductor shape
- 25 - 630 sqmm supplied in non compacted circular stranded (rm) or compacted circular stranded (cm) conductor shape
- Other size and shape can be discussed

Standard Packing

- 1.5 - 120 sqmm supplied in wooden drum @ 1000 meters
- 150 - 400 sqmm supplied in wooden drum on available length
- Length Tolerance per drum ± 2%


Physical Properties				Electrical Properties									
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	X	C	Z	Max. Current - Carrying Capacity at 30 °C *		Max. Short Circuit Current at 1 Second
					Max. DC Resistance at 20 °C	Max. AC Resistance at 70 °C					in air	in ground	
mm²			mm	kg/km	ohm/km	ohm/km	mH/km	ohm/km	µF/km	mH/km	A	A	kA
2	x	6	18.20	600	3.080	3.685	0.293	0.092	0.266	3.686	56	63	0.86
2	x	10	20.00	755	1.830	2.190	0.274	0.086	0.326	2.191	76	83	1.43
2	x	16	22.10	963	1.150	1.376	0.259	0.081	0.397	1.379	100	107	2.29
2	x	25	25.50	1,308	0.727	0.870	0.256	0.080	0.414	0.874	134	138	3.58
2	x	35	27.70	1,612	0.524	0.627	0.247	0.077	0.478	0.632	164	165	5.01
2	x	50	31.20	2,047	0.387	0.464	0.246	0.077	0.485	0.470	202	195	7.15
2	x	70	34.90	2,657	0.268	0.321	0.237	0.075	0.569	0.330	253	238	10.01
2	x	95	39.80	3,493	0.193	0.232	0.236	0.074	0.586	0.243	314	285	13.59
2	x	120	44.00	4,472	0.153	0.184	0.231	0.073	0.653	0.198	363	323	17.16
2	x	150	48.10	5,353	0.124	0.150	0.232	0.073	0.648	0.167	418	362	21.45
2	x	185	52.70	6,473	0.099	0.121	0.231	0.073	0.653	0.141	485	410	26.46
2	x	240	59.60	8,289	0.075	0.093	0.229	0.072	0.681	0.118	581	475	34.32
2	x	300	65.50	10,066	0.060	0.075	0.228	0.072	0.697	0.104	670	534	42.90
2	x	400	71.90	12,184	0.047	0.060	0.227	0.071	0.725	0.093	776	604	57.20
3	x	6	19.00	685	3.080	3.685	0.293	0.092	0.266	3.686	47	52	0.86
3	x	10	21.20	890	1.830	2.190	0.274	0.086	0.326	2.191	63	69	1.43
3	x	16	23.40	1,157	1.150	1.376	0.259	0.081	0.397	1.379	84	88	2.29
3	x	25	27.00	1,596	0.727	0.870	0.256	0.080	0.414	0.874	112	114	3.58
3	x	35	29.50	1,995	0.524	0.627	0.247	0.077	0.478	0.632	137	136	5.01
3	x	50	33.40	2,566	0.387	0.464	0.246	0.077	0.485	0.470	168	161	7.15
3	x	70	37.40	3,370	0.268	0.321	0.237	0.075	0.569	0.330	212	196	10.01
3	x	95	43.50	4,743	0.193	0.232	0.236	0.074	0.586	0.243	262	234	13.59
3	x	120	47.10	5,680	0.153	0.184	0.231	0.073	0.653	0.198	304	266	17.16
3	x	150	51.40	6,829	0.124	0.150	0.232	0.073	0.648	0.167	350	298	21.45
3	x	185	56.60	8,324	0.099	0.121	0.231	0.073	0.653	0.141	406	337	26.46
3	x	240	64.00	10,690	0.075	0.093	0.229	0.072	0.681	0.118	486	391	34.32
3	x	300	70.10	12,999	0.060	0.075	0.225	0.071	0.753	0.103	562	440	42.90
3	x	400	77.00	15,784	0.047	0.060	0.227	0.071	0.725	0.093	652	498	57.20
4	x	6	20.40	795	3.080	3.685	0.293	0.092	0.266	3.686	48	53	0.86
4	x	10	22.70	1,047	1.830	2.190	0.274	0.086	0.326	2.191	65	70	1.43
4	x	16	25.30	1,381	1.150	1.376	0.259	0.081	0.397	1.379	87	89	2.29
4	x	25	29.30	1,927	0.727	0.870	0.256	0.080	0.414	0.874	116	115	3.58
4	x	35	32.00	2,429	0.524	0.627	0.247	0.077	0.478	0.632	143	138	5.01
4	x	50	36.60	3,158	0.387	0.464	0.246	0.077	0.485	0.470	175	163	7.15
4	x	70	41.90	4,451	0.268	0.321	0.237	0.075	0.569	0.330	220	198	10.01
4	x	95	47.70	5,863	0.193	0.232	0.236	0.074	0.586	0.243	273	238	13.59
4	x	120	51.70	7,049	0.153	0.184	0.231	0.073	0.653	0.198	317	269	17.16
4	x	150	56.80	8,526	0.124	0.150	0.232	0.073	0.648	0.167	364	302	21.45
4	x	185	62.40	10,384	0.099	0.121	0.231	0.073	0.653	0.141	423	342	26.46
4	x	240	70.70	13,398	0.075	0.093	0.229	0.072	0.681	0.118	506	396	34.32
4	x	300	77.70	16,368	0.060	0.075	0.228	0.072	0.697	0.104	584	446	42.90
4	x	400	85.40	19,904	0.047	0.060	0.227	0.071	0.725	0.093	678	505	57.20

*Further information about derating factors for arrangement can be found on supplementary technical information.

450/750 V, NYAF (Cu/PVC-f)

(Flexible Copper, PVC Sheated)
Standard Specification : SNI 04-6629.3, IEC 60227

**For Insulation colour can be based on Customer Request or Follow Standard.*

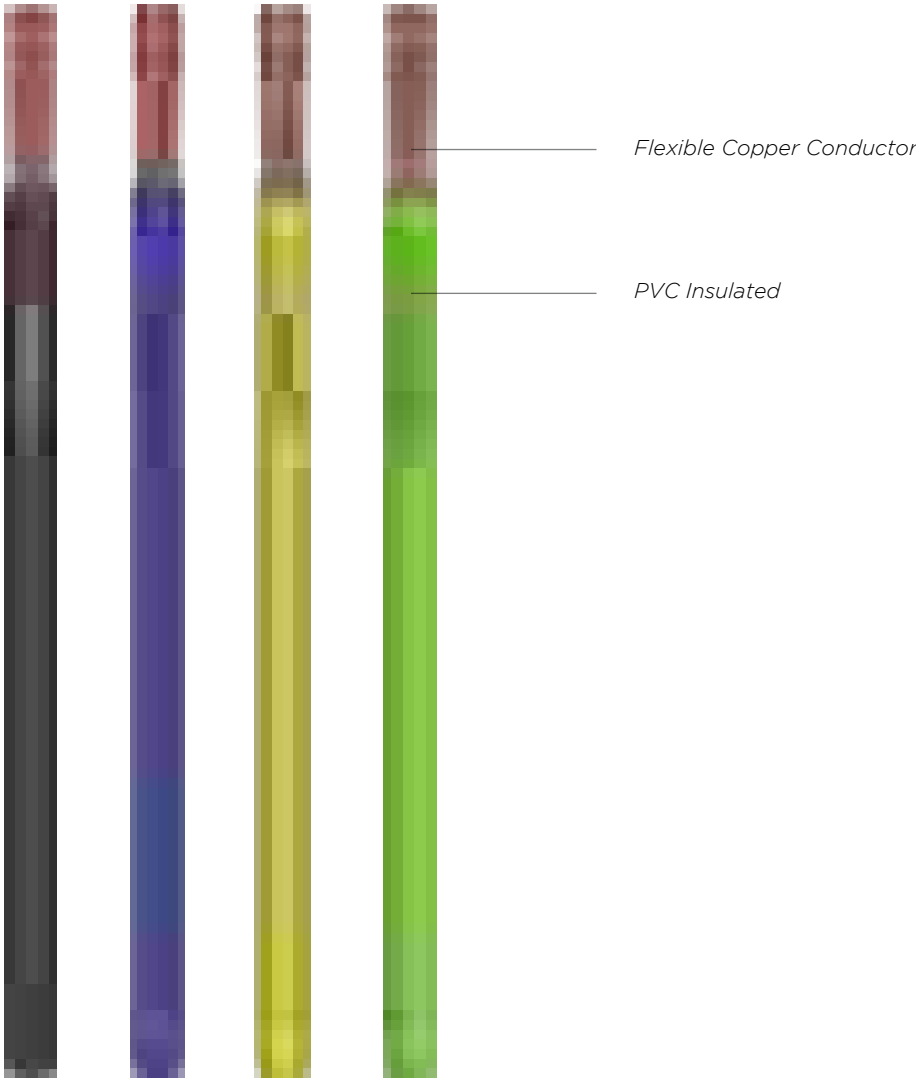

Application

Permanent installation in conduit or exposed wiring in dry room and distribution panel connector

Special Features on Request

- Anti termite
- Anti Rodent
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category

Standard Packing

- 1.5 - 16 sqmm supplied in coil @ 100 meters
- 25 - 240 sqmm supplied in wooden drum @ 1000 meters
- Length Tolerance per drum ± 2%
- Other size can be discussed


PHYSICAL PROPERTIES						ELECTRICAL PROPERTIES				
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor	Min. Insulation Resistance	L	Max. Current - Carrying Capacity at 30 °C		Max. Short Circuit Current at 1 Second
					Max. DC Resistance at 20 °C			In Air	In Pipe	
mm²			mm	kg/km	ohm/km	M.ohm.km	mH/km	A	A	kA
1	x	0,75	2.33	11	26.000	0.010	0.439	16	12	0.11
1	x	1,5	2.94	20	13.300	0.010	0.412	24	18	0.21
1	x	2,5	3.69	32	7.980	0.009	0.410	32	24	0.36
1	x	4	4.22	50	4.950	0.007	0.359	44	33	0.57
1	x	6	4.88	70	3.300	0.006	0.342	57	43	0.86
1	x	10	6.11	111	1.910	0.005	0.339	79	60	1.43
1	x	16	7.01	170	1.210	0.004	0.323	105	79	2.29
1	x	25	9.57	272	0.780	0.004	0.311	148	111	3.58
1	x	35	10.34	350	0.554	0.004	0.306	178	133	5.01
1	x	50	12.17	502	0.386	0.003	0.301	224	168	7.15
1	x	70	13.64	687	0.272	0.003	0.230	286	215	10.01
1	x	95	16.96	952	0.206	0.003	0.291	352	264	13.59
1	x	120	17.66	1174	0.161	0.003	0.289	402	301	17.16
1	x	150	21.51	1490	0.129	0.003	0.285	477	358	21.45
1	x	185	23.78	1841	0.106	0.003	0.282	566	425	26.46
1	x	240	27.27	2348	0.080	0.003	0.283	668	501	34.32

**Further information about derating factors for arrangement can be found on supplementary technical information.*

300/500 V, NYMHY (Cu/PVC/PVC-f) 0.6/1 (1.2) kV, NYYHY (Cu/PVC/PVC-f)

(Flexible Copper Conductor, PVC Insulated, PVC Outer Sheated)
Standard Specification : SNI 04-6629.5 ; SNI IEC 60502-1, IEC 60227

**For Insulation colour can be based on Customer Request or Follow Standard.*

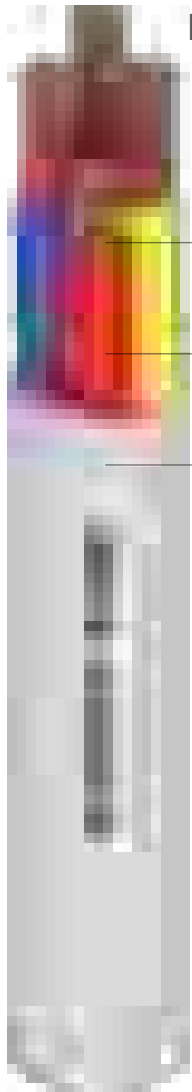


NYMHY

Flexible Copper Conductor

PVC Insulated

PVC Outer Sheated

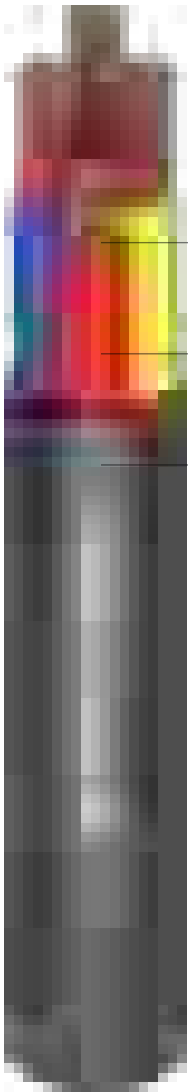

NYYHY

Flexible Copper Conductor

PVC Insulated

PVC Outer Sheated

Application

Permanent installation in conduit or exposed wiring in dry room

Special Features on Request

- Anti termite
- Anti Rodent
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category

Standard Packing

- 1.5 - 10 sqmm in coil @ 100 m
- 16 - 50 wooden drum @ 1000 m or @ 2000 m
- Length Tolerance per drum ± 2%

NYMHY										
Physical Properties				Electrical Properties						
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	Max. Current - Carrying Capacity at 30 °C *		Max. Short Circuit Current at 1 Second
					Max. DC Resistance at 20 °C	Max. AC Resistance at 70 °C		in air	in pipe	
mm²			mm	kg/km	ohm/km	ohm/km	mH/km	A	A	kA
2	x	0,75	6.40	59	26.000	24.500	0.349	14	10	0.11
2	x	1,5	7.60	88	13.300	12.100	0.327	21	16	0.21
2	x	2,5	9.50	140	7.980	7.410	0.326	28	21	0.36
2	x	4	10.50	190	4.950	4.610	0.285	39	29	0.57
2	x	6	12.10	257	3.300	3.080	0.271	50	37	0.86
2	x	10	17.20	492	1.910	1.830	0.269	74	55	1.43
2	x	16	19.20	669	1.210	1.150	0.256	98	70	2.29
2	x	25	24.50	1,047	0.780	0.727	0.247	136	93	3.58
2	x	35	26.30	1,272	0.554	0.524	0.243	163	113	5.01
3	x	0,75	6.70	69	26.000	24.500	0.349	12	9	0.11
3	x	1,5	8.20	110	13.300	12.100	0.327	18	13	0.21
3	x	2,5	10.30	174	7.980	7.410	0.326	24	18	0.36
3	x	4	11.20	235	4.950	4.610	0.285	33	24	0.57
3	x	6	12.80	322	3.300	3.080	0.271	42	31	0.86
3	x	10	18.20	599	1.910	1.830	0.269	62	46	1.43
3	x	16	20.30	832	1.210	1.150	0.256	82	58	2.29
3	x	25	26.00	1,300	0.780	0.727	0.247	114	77	3.58
3	x	35	27.90	1,601	0.554	0.524	0.243	136	93	5.01
4	x	0,75	7.30	83	26.000	24.500	0.349	12	9	0.11
4	x	1,5	9.20	138	13.300	12.100	0.327	16	12	0.21
4	x	2,5	11.20	211	7.980	7.410	0.326	21	16	0.36
4	x	4	12.50	296	4.950	4.610	0.285	29	22	0.57
4	x	6	14.10	398	3.300	3.080	0.271	37	28	0.86
4	x	10	20.00	738	1.910	1.830	0.268	56	42	1.43
4	x	16	22.40	1,035	1.210	1.150	0.256	73	52	2.29
4	x	25	28.80	1,617	0.780	0.727	0.247	102	69	3.58
4	x	35	30.80	2,001	0.554	0.524	0.243	123	83	5.01

**Further information about derating factors for arrangement can be found on supplementary technical information.*

NYYHY									
Physical Properties			Electrical Properties						
Nom Cross Section Area	Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	Max. Current - Carrying Capacity at 30 °C *		Max. Short Circuit Current at 1 Second	
			Max. DC Resistance at 20 °C	Max. AC Resistance at 70 °C		in air	in pipe		
mm²	mm	kg/km	ohm/km	ohm/km	mH/km	A	A	kA	
2 x 0,75	7,20	72	26.000	24.500	0.349	14	10	0.11	
2 x 1,5	8,40	104	13.300	12.100	0.327	21	16	0.21	
2 x 2,5	9,70	145	7.980	7.410	0.326	28	21	0.36	
2 x 4	11,90	228	4.950	4.610	0.285	39	29	0.57	
2 x 6	13,50	301	3.300	3.080	0.271	50	37	0.86	
2 x 10	17,60	509	1.910	1.830	0.269	74	55	1.43	
2 x 16	19,40	678	1.210	1.150	0.256	98	-	2.29	
2 x 25	24,70	1,058	0.780	0.727	0.247	136	-	3.58	
2 x 35	26,50	1,285	0.554	0.524	0.243	163	-	5.01	
2 x 50	30,30	1,748	0.386	0.387	0.239	204	-	7.15	
3 x 0,75	7,60	84	26.000	24.500	0.349	12	9	0.11	
3 x 1,5	8,90	123	13.300	12.100	0.327	18	13	0.21	
3 x 2,5	10,30	174	7.980	7.410	0.326	24	18	0.36	
3 x 4	12,70	277	4.950	4.610	0.285	33	24	0.57	
3 x 6	14,30	370	3.300	3.080	0.271	42	31	0.86	
3 x 10	18,60	617	1.910	1.830	0.269	62	46	1.43	
3 x 16	20,50	842	1.210	1.150	0.256	82	-	2.29	
3 x 25	26,20	1,313	0.780	0.727	0.247	114	-	3.58	
3 x 35	28,10	1,614	0.554	0.524	0.243	136	-	5.01	
3 x 50	32,20	2,218	0.386	0.387	0.239	172	-	7.15	
4 x 0,75	8,30	100	26.000	24.500	0.349	12	9	0.11	
4 x 1,5	9,70	149	13.300	12.100	0.327	16	12	0.21	
4 x 2,5	11,20	211	7.980	7.410	0.326	21	16	0.36	
4 x 4	13,90	338	4.950	4.610	0.285	29	22	0.57	
4 x 6	15,70	454	3.300	3.080	0.271	37	28	0.86	
4 x 10	20,20	748	1.910	1.830	0.268	56	42	1.43	
4 x 16	22,40	1,035	1.210	1.150	0.256	73	-	2.29	
4 x 25	28,80	1,617	0.780	0.727	0.247	102	-	3.58	
4 x 35	30,80	2,001	0.554	0.524	0.243	123	-	5.01	
4 x 50	35,50	2,764	0.386	0.387	0.239	156	-	7.15	

**Further information about derating factors for arrangement can be found on supplementary technical information.*

0.6/1 (1.2) kV, N2XRY (Cu / XLPE / AWA / PVC)


0.6/1 (1.2) kV, N2XRGbY (Cu / XLPE / SWA / PVC)

(Copper Conductor, XLPE Insulated, Alumunium Wire Armor, PVC Sheathed)

(Copper Conductor, XLPE Insulated, Galvanized Steel Wire Armor, PVC Sheathed)

Standard Specification : SNI IEC 60502-1, IEC 60502-1

**For Insulation colour can be based on Customer Request or Follow Standard.*

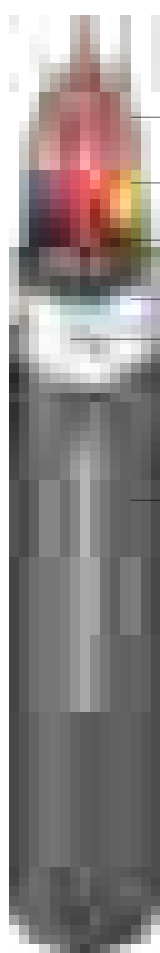

Copper Conductor

XLPE Insulated

PVC Filler

Galvanized Steel Round Wire

Galvanized Steel Tape

PVC Outer Sheath



Copper Conductor

XLPE Insulated

PVC Filler

Alumunium Wire Armor

Polyester Tape

PVC Outer Sheath

Application

For installation in ground, indoors, cable trunking and outdoors if increased mechanical protection is required or where high-pulling stress may occur during installation or operation.

Special Features on Request


- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen

Note : Conductor Shape

0.6/1 (1.2) kV, NAYFGbY (Al / PVC / SFA / PVC)

(Alumunium Conductor, PVC Insulated, Galvanized Steel Flat Armor, PVC Sheathed)
Standard Specification : SNI IEC 60502-1, IEC 60502-1

*For Insulation colour can be based on Customer Request or Follow Standard.

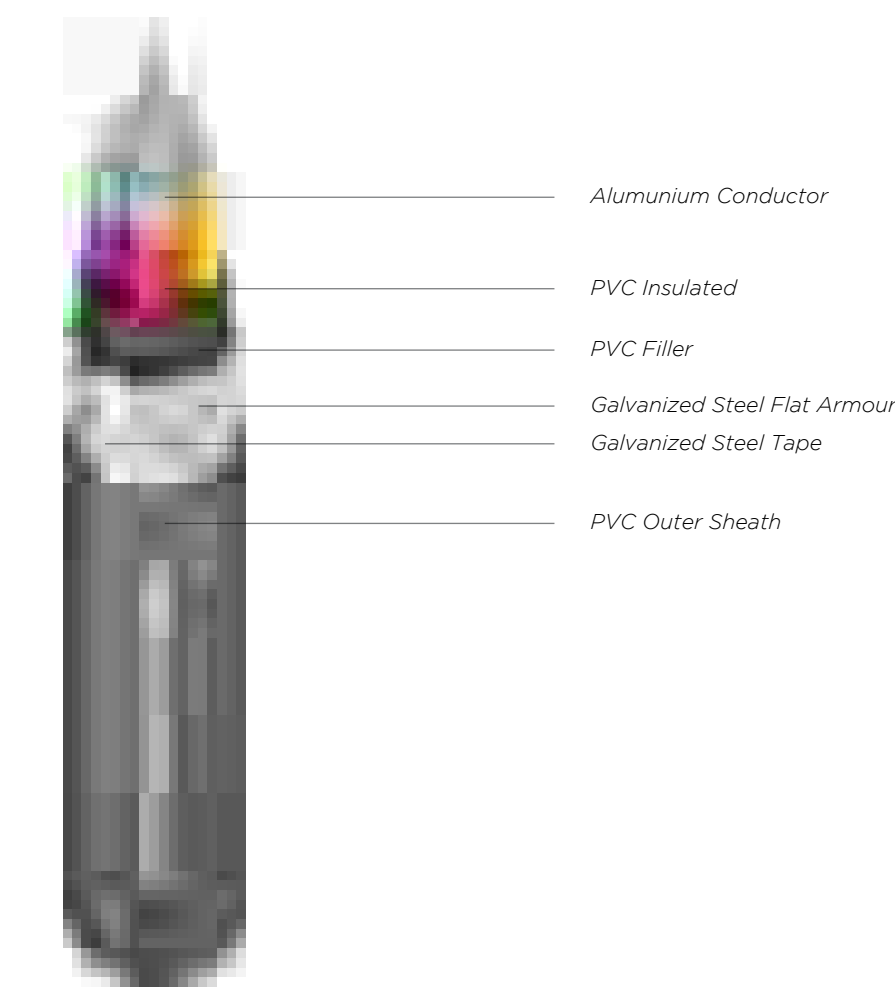

Application

For installation in ground, indoors, cable trunking and outdoors if increased mechanical protection is required or where high-pulling stress may occur during installation or operation.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen

Note : Conductor Shape

- 10 sqmm supplied in non compacted circular stranded (rm) conductor shape
- 25 - 400 sqmm supplied in non compacted circular stranded (rm) or compacted circular stranded (cm) conductor shape
- Other size and shape can be discussed

Standard Packing

- 10 - 400 sqmm supplied in wooden drum @ 1000 m
- drum on available length
- Length Tolerance per drum ± 2%

Physical Properties				Electrical Properties									
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	X	C	Z	Max. Current - Carrying Capacity at 30 °C *		Max. Short Circuit Current at 1 Second
					Max. DC Resistance at 20 °C	Max. AC Resistance at 70 °C					in air	in ground	
mm²			mm	kg/km	ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	A	kA
2	x	10	21.10	818	3.080	3.701	0.274	0.086	0.326	3.702	60	65	0.94
2	x	16	23.20	990	1.910	2.295	0.259	0.081	0.397	2.296	79	84	1.50
2	x	25	26.50	1.253	1.200	1.442	0.256	0.080	0.414	1.444	106	108	2.35
2	x	35	28.80	1.447	0.868	1.043	0.247	0.077	0.478	1.046	129	128	3.29
2	x	50	32.40	1.771	0.641	0.770	0.246	0.077	0.485	0.774	158	152	4.70
2	x	70	36.10	2.157	0.443	0.533	0.237	0.075	0.569	0.538	199	185	6.58
2	x	95	40.80	2.704	0.320	0.385	0.236	0.074	0.586	0.392	246	222	8.93
2	x	120	44.60	3.228	0.253	0.305	0.231	0.073	0.653	0.313	285	252	11.28
2	x	150	48.70	3.779	0.206	0.248	0.232	0.073	0.648	0.259	327	282	14.10
2	x	185	54.00	4.576	0.164	0.198	0.231	0.073	0.653	0.211	380	319	17.39
2	x	240	60.40	5.636	0.125	0.152	0.229	0.072	0.681	0.168	453	370	22.56
2	x	300	66.10	6.665	0.100	0.122	0.228	0.072	0.697	0.142	527	418	28.20
2	x	400	73.30	8.087	0.078	0.096	0.227	0.071	0.725	0.120	614	476	37.60
3	x	10	22.00	901	3.080	3.701	0.274	0.086	0.326	3.702	50	53	0.94
3	x	16	24.30	1.069	1.910	2.295	0.259	0.081	0.397	2.296	66	69	1.50
3	x	25	27.80	1.369	1.200	1.442	0.256	0.080	0.414	1.444	89	89	2.35
3	x	35	30.30	1.620	0.868	1.043	0.247	0.077	0.478	1.046	108	106	3.29
3	x	50	34.20	1.986	0.641	0.770	0.246	0.077	0.485	0.774	132	125	4.70
3	x	70	38.20	2.459	0.443	0.533	0.237	0.075	0.569	0.538	166	153	6.58
3	x	95	43.90	3.193	0.320	0.385	0.236	0.074	0.586	0.392	206	182	8.93
3	x	120	47.50	3.712	0.253	0.305	0.231	0.073	0.653	0.313	239	207	11.28
3	x	150	51.80	4.355	0.206	0.248	0.232	0.073	0.648	0.259	274	232	14.10
3	x	185	57.50	5.277	0.164	0.198	0.231	0.073	0.653	0.211	320	263	17.39
3	x	240	64.40	6.515	0.125	0.152	0.229	0.072	0.681	0.168	382	305	22.56
3	x	300	70.70	7.787	0.100	0.122	0.228	0.072	0.697	0.142	441	344	28.20
3	x	400	78.20	9.426	0.078	0.096	0.227	0.071	0.725	0.120	516	393	37.60
4	x	10	23.60	1.012	3.080	3.701	0.274	0.086	0.326	3.702	51	54	0.94
4	x	16	26.10	1.209	1.910	2.295	0.259	0.081	0.397	2.296	68	70	1.50
4	x	25	30.10	1.584	1.200	1.442	0.256	0.080	0.414	1.444	92	90	2.35
4	x	35	33.10	1.867	0.868	1.043	0.247	0.077	0.478	1.046	112	107	3.29
4	x	50	37.50	2.321	0.641	0.770	0.246	0.077	0.485	0.774	137	126	4.70
4	x	70	42.50	3.000	0.443	0.533	0.237	0.075	0.569	0.538	172	154	6.58
4	x	95	48.10	3.768	0.320	0.385	0.223	0.070	0.813	0.391	208	183	8.93
4	x	120	52.10	4.354	0.253	0.305	0.222	0.070	0.841	0.313	243	208	11.28
4	x	150	57.20	5.176	0.206	0.249	0.223	0.070	0.808	0.258	280	233	14.10
4	x	185	63.50	6.294	0.164	0.198	0.224	0.070	0.795	0.210	325	265	17.39
4	x	240	71.10	7.776	0.125	0.152	0.221	0.069	0.857	0.167	390	307	22.56
4	x	300	78.10	9.301	0.100	0.122	0.219	0.069	0.902	0.140	450	346	28.20
4	x	400	86.60	11.344	0.078	0.096	0.227	0.071	0.725	0.120	534	397	37.60

*Further information about derating factors for arrangement can be found on supplementary technical information.


0.6/1 (1.2) kV, MC-HL XHHW-2

(Cu / XLPE / CAA / PE)

(Copper Conductor, XLPE Insulation, Corrugated Aluminium Armour and PE Sheath)

Standard Specification : IEC 60502-1, ICEA S-95-568/NEMA 70

*For Insulation colour can be based on Customer Request or Follow Standard.

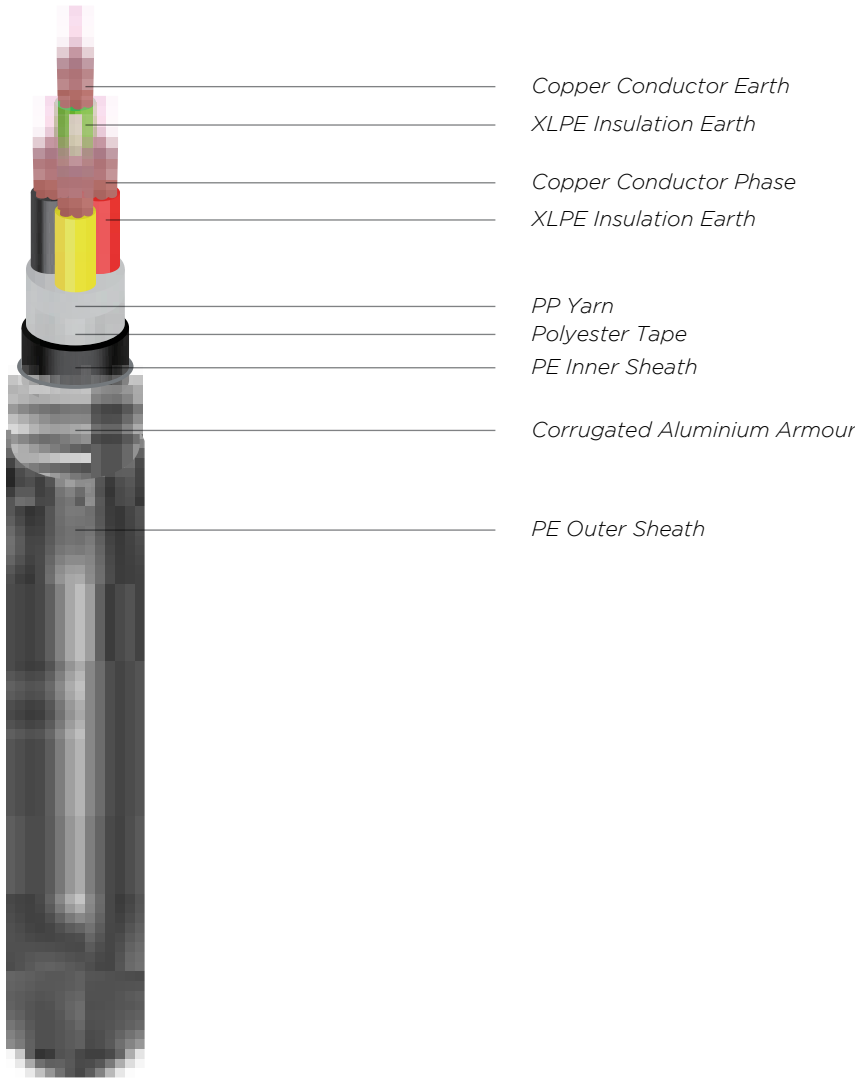

Application

MC-HL XHHW-2 may be installed indoors or outdoors, in wet or dry locations, as open runs of cable secured to supports spaced not more than six feet apart, in cable tray, as aerial cable on a messenger, in any approved raceway, direct burial, or encased in concrete.

MC-HL XHHW-2 are also approved for use in Class I & II, Division 2, Class III, Divisions 1 and 2, and Class I, Zone 2 hazardous locations per NEC articles 501, 502, 503 and 505; in Zone 2, Class II Div 2, Class III Div 1 and Class III Div 2 per CEC.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen

Hazardous Location

According to NEC 501, 502, 503 & 505

Physical Properties						Electrical Properties				
Phase Conductor		Earthing Conductor		Approx. Overall Diameter	Approx. Cable Weight	Conductor		Max. Current - Carrying Capacity at 30 °C *	Max. Short Circuit Current at 1 Second	AC Voltage Test
No. of Core	Size	No. of Core	Size			Max. DC Resistance at 20 °C	Max. AC Resistance at 70 °C			
								Pcs		
2	8 (8,36 mm²)	1	8 (8,36 mm²)	23.90	756	2.100	2.100	113	1.20	3.5/5
3	8 (8,36 mm²)	1	8 (8,36 mm²)	24.90	873	2.100	2.100	93	1.20	3.5/5
4	8 (8,36 mm²)	1	8 (8,36 mm²)	26.40	1,017	2.100	2.100	81	1.20	3.5/5
2	6 (13.3 mm²)	1	6 (13.3 mm²)	25.90	976	1.320	1.320	145	1.90	3.5/5
3	6 (13.3 mm²)	1	6 (13.3 mm²)	27.40	1,145	1.320	1.320	119	1.90	3.5/5
4	6 (13.3 mm²)	1	6 (13.3 mm²)	30.40	1,372	1.320	1.320	105	1.90	3.5/5
2	4 (21.2 mm²)	1	6 (13.3 mm²)	31.40	1,375	0.841	1.350	189	3.03	3.5/5
3	4 (21.2 mm²)	1	6 (13.3 mm²)	34.30	1,701	0.841	1.350	156	3.03	3.5/5
4	4 (21.2 mm²)	1	6 (13.3 mm²)	37.00	2,053	0.841	1.350	136	3.03	3.5/5
2	2 (33.6 mm²)	1	5 (16.65 mm²)	35.30	1,868	0.525	1.057	243	4.81	3.5/5
3	2 (33.6 mm²)	1	5 (16.65 mm²)	3.80	2,281	0.525	1.057	200	4.81	3.5/5
4	2 (33.6 mm²)	1	5 (16.65 mm²)	41.20	2,797	0.525	1.057	175	4.81	3.5/5
2	1/0 (53.5 mm²)	1	3 (26.37 mm²)	39.70	2,563	0.328	0.667	311	7.66	3.5/5
3	1/0 (53.5 mm²)	1	3 (26.37 mm²)	42.90	3,186	0.328	0.667	256	7.66	3.5/5
4	1/0 (53.5 mm²)	1	3 (26.37 mm²)	47.00	4,024	0.328	0.667	225	7.66	3.5/5
2	2/0 (67,4 mm²)	1	2 (33,6 mm²)	43.90	3,179	0.262	0.525	353	9.64	3.5/5
3	2/0 (67,4 mm²)	1	2 (33,6 mm²)	48.00	4,056	0.262	0.525	291	9.64	3.5/5
4	2/0 (67,4 mm²)	1	2 (33,6 mm²)	52.90	5,041	0.262	0.525	255	9.64	3.5/5
2	4/0 (107 mm²)	1	1/0 (53.5 mm²)	49.70	4,554	0.164	0.328	452	15.31	3.5/5
3	4/0 (107 mm²)	1	1/0 (53.5 mm²)	54.90	5,745	0.164	0.328	374	15.31	3.5/5
4	4/0 (107 mm²)	1	1/0 (53.5 mm²)	59.80	7,173	0.164	0.328	328	15.31	3.5/5
2	250 (127 mm²)	1	2/0 (67,4 mm²)	55.40	5,474	0.138	0.262	500	18.17	3.5/5
3	250 (127 mm²)	1	2/0 (67,4 mm²)	60.30	6,889	0.138	0.262	413	18.17	3.5/5
4	250 (127 mm²)	1	2/0 (67,4 mm²)	70.30	8,856	0.138	0.262	365	18.17	3.5/5
2	350 (177 mm²)	1	3/0 (85 mm²)	61.30	7,091	0.100	0.207	594	25.33	3.5/5
3	350 (177 mm²)	1	3/0 (85 mm²)	71.80	9,272	0.100	0.207	496	25.33	3.5/5
4	350 (177 mm²)	1	3/0 (85 mm²)	78.20	11,596	0.100	0.207	435	25.33	3.5/5
2	500 (253 mm²)	1	250 (127 mm²)	74.50	10,011	0.070	0.138	727	36.20	3.5/5
3	500 (253 mm²)	1	250 (127 mm²)	81.80	12,887	0.070	0.138	602	36.20	3.5/5
4	500 (253 mm²)	1	250 (127 mm²)	89.20	16,150	0.070	0.138	528	36.20	3.5/5

*Further information about derating factors for arrangement can be found on supplementary technical information.

LOW VOLTAGE CONTROL CABLES




INSTRUMENT CABLES



300/500 V, Instrument Cable (Cu / PVC / ISCR / OSCR / PVC)

Standard Spesification : BS-EN 50288-7, IEC 60332-3, IEC-60332-3 Cat.C

**For Insulation colour can be based on Customer Request or Follow Standard.*

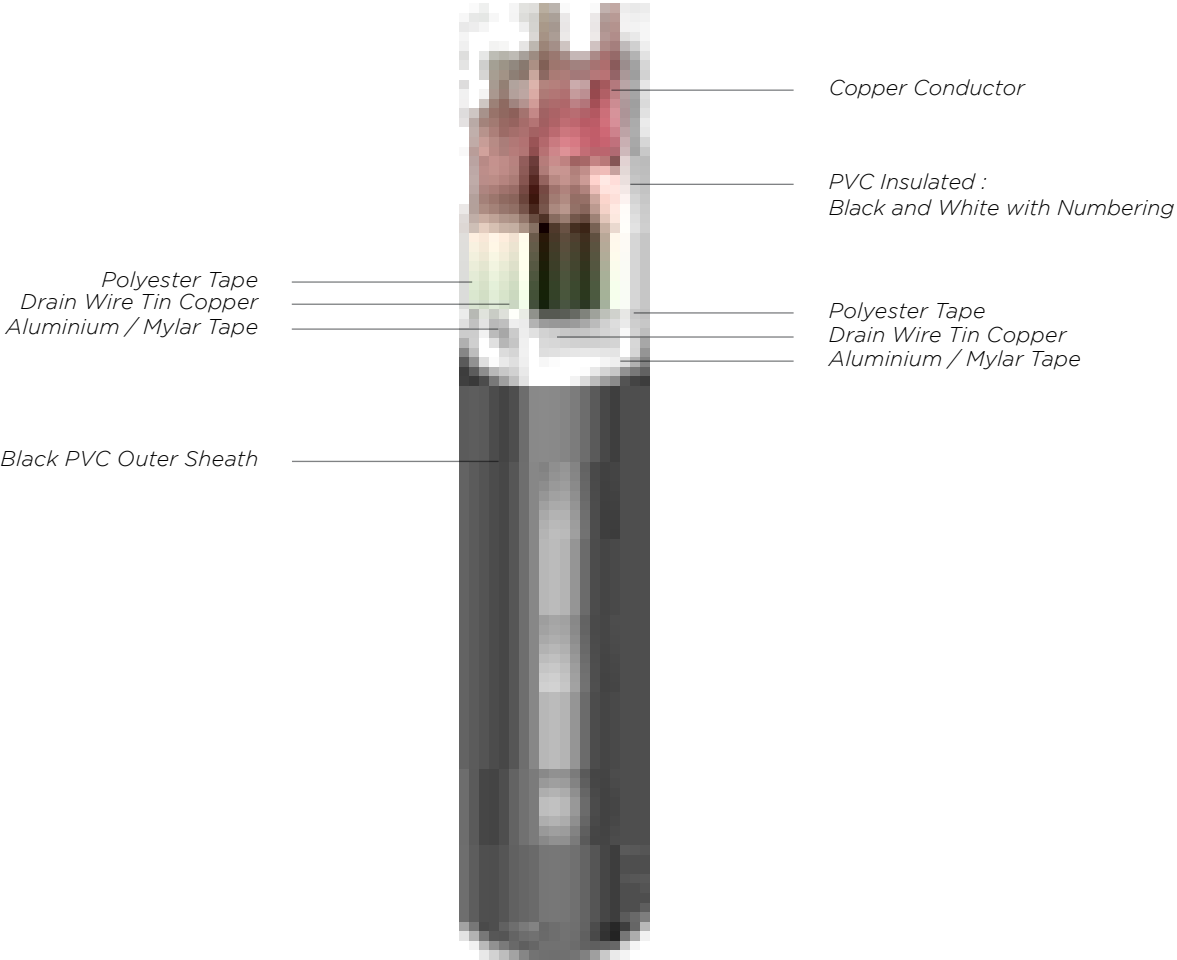

Application

Used for the transmission of measuring data signals in power stations and industrial plants. This cable is suitable for fixed indoor,outdoor,or underground installations.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen

Note : Conductor Shape

- 0.5 - 0.75 sqmm supplied in non-compacted circular stranded (rm)
- 1.5 - 2.5 sqmm supplied in non-compacted circular stranded (rm) or solid (re)
- Other size and shape can be discussed

Standard Packing

- Wooden drum @500 meters.
- Length Tolerance per drum $\pm$ 2%
- Other length and type of packing on request.

300/500 V, Instrument Cable (Cu / PVC / ISCR / OSCR / PVC)

Standard Spesification : BS-EN 50288-7, IEC 60332-3, IEC-60332-3 Cat.C

**For Insulation colour can be based on Customer Request or Follow Standard.*

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES				
Size			Approx. Overall Diameter	Approx. Cable Weight	Conductor	Min. Insul Resistance	Max. Capacitance at 1 Khz	Max. L/R ratio	AC Voltage Test
					Max. DC Resistance at 20 °C				
mm²			mm	kg/km	ohm/km	M.ohm.km	pF/m	µH/ Ω	Volt/1 minutes
2P	x	0.5	10.30	121	36.000	25	250	25	1000
2P	x	0.75	11.20	144	24.500	25	250	25	1000
2P	x	1	11.70	157	18.100	25	250	40	1000
2P	x	1.5	12.70	188	12.100	25	250	40	1000
4P	x	0.5	13.80	201	36.000	25	250	25	1000
4P	x	0.75	14.80	234	24.500	25	250	25	1000
4P	x	1	15.80	268	18.100	25	250	40	1000
4P	x	1.5	17.20	326	12.100	25	250	40	1000
6P	x	0.5	16.10	276	36.000	25	250	25	1000
6P	x	0.75	17.30	324	24.500	25	250	25	1000
6P	x	1	18.30	371	18.100	25	250	40	1000
6P	x	1.5	20.00	457	12.100	25	250	40	1000
8P	x	0.5	18.20	345	36.000	25	250	25	1000
8P	x	0.75	19.80	417	24.500	25	250	25	1000
8P	x	1	20.70	466	18.100	25	250	40	1000
8P	x	1.5	22.90	590	12.100	25	250	40	1000
10P	x	0.5	20.50	433	36.000	25	250	25	1000
10P	x	0.75	22.10	510	24.500	25	250	25	1000
10P	x	1	23.40	584	18.100	25	250	40	1000
10P	x	1.5	25.80	737	12.100	25	250	40	1000
12P	x	0.5	22.50	502	36.000	25	250	25	1000
12P	x	0.75	24.30	595	24.500	25	250	25	1000
12P	x	1	25.70	681	18.100	25	250	40	1000
12P	x	1.5	28.40	862	12.100	25	250	40	1000
16P	x	0.5	25.70	647	36.000	25	250	25	1000
16P	x	0.75	27.70	768	24.500	25	250	25	1000
16P	x	1	29.40	880	18.100	25	250	40	1000
16P	x	1.5	32.50	1,117	12.100	25	250	40	1000
20P	x	0.5	28.30	789	36.000	25	250	25	1000
20P	x	0.75	30.50	939	24.500	25	250	25	1000
20P	x	1	32.30	1,075	18.100	25	250	40	1000
20P	x	1.5	35.70	1,366	12.100	25	250	40	1000
24P	x	0.5	31.70	941	36.000	25	250	25	1000
24P	x	0.75	34.40	1,139	24.500	25	250	25	1000
24P	x	1	36.40	1,302	18.100	25	250	40	1000
24P	x	1.5	40.20	1,652	12.100	25	250	40	1000

**Further information about derating factors for arrangement can be found on supplementary technical information.*


PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES				
Size			Approx. Overall Diameter	Approx. Cable Weight	Conductor	Min. Insul Resistance	Max. Capacitance at 1 Khz	Max. L/R ratio	AC Voltage Test
					Max. DC Resistance at 20 °C				
mm²			mm	kg/km	ohm/km	M.ohm.km	pF/m	µH/ Ω	Volt/1 minutes
2T	x	0.5	11.10	149	36.000	25	250	25	1000
2T	x	0.75	11.80	174	24.500	25	250	25	1000
2T	x	1	12.40	193	18.100	25	250	40	1000
2T	x	1.5	13.70	243	12.100	25	250	40	1000
4T	x	0.5	14.80	253	36.000	25	250	25	1000
4T	x	0.75	15.90	300	24.500	25	250	25	1000
4T	x	1	16.70	336	18.100	25	250	40	1000
4T	x	1.5	18.50	429	12.100	25	250	40	1000
6T	x	0.5	17.20	351	36.000	25	250	25	1000
6T	x	0.75	18.50	418	24.500	25	250	25	1000
6T	x	1	19.70	482	18.100	25	250	40	1000
6T	x	1.5	21.50	605	12.100	25	250	40	1000
8T	x	0.5	19.50	441	36.000	25	250	25	1000
8T	x	0.75	21.20	540	24.500	25	250	25	1000
8T	x	1	22.30	611	18.100	25	250	40	1000
8T	x	1.5	24.60	785	12.100	25	250	40	1000
10T	x	0.5	22.00	552	36.000	25	250	25	1000
10T	x	0.75	23.60	663	24.500	25	250	25	1000
10T	x	1	25.10	764	18.100	25	250	40	1000
10T	x	1.5	27.60	980	12.100	25	250	40	1000
12T	x	0.5	24.10	644	36.000	25	250	25	1000
12T	x	0.75	26.00	776	24.500	25	250	25	1000
12T	x	1	27.60	894.99	18.100	25	250	40	1000
12T	x	1.5	30.40	1150.67	12.100	25	250	40	1000
16T	x	0.5	27.60	831.98	36.000	25	250	25	1000
16T	x	0.75	29.90	1021.13	24.500	25	250	25	1000
16T	x	1	31.50	1161.09	18.100	25	250	40	1000
16T	x	1.5	34.80	1496.3	12.100	25	250	40	1000
20T	x	0.5	30.30	1016.56	36.000	25	250	25	1000
20T	x	0.75	32.90	1249.11	24.500	25	250	25	1000
20T	x	1	34.80	1440.4	18.100	25	250	40	1000
20T	x	1.5	38.40	1856.11	12.100	25	250	40	1000
24T	x	0.5	33.90	1213.51	36.000	25	250	25	1000
24T	x	0.75	36.80	1491.02	24.500	25	250	25	1000
24T	x	1	39.00	1718.98	18.100	25	250	40	1000
24T	x	1.5	43.30	2237.59	12.100	25	250	40	1000

**Further information about derating factors for arrangement can be found on supplementary technical information.*

300/500 V, Instrument Cable (Cu / PVC / OSCR / PVC)

Standard Spesification : BS-EN 50288-7, IEC 60332-3, IEC-60332-3 Cat.C

**For Insulation colour can be based on Customer Request or Follow Standard.*

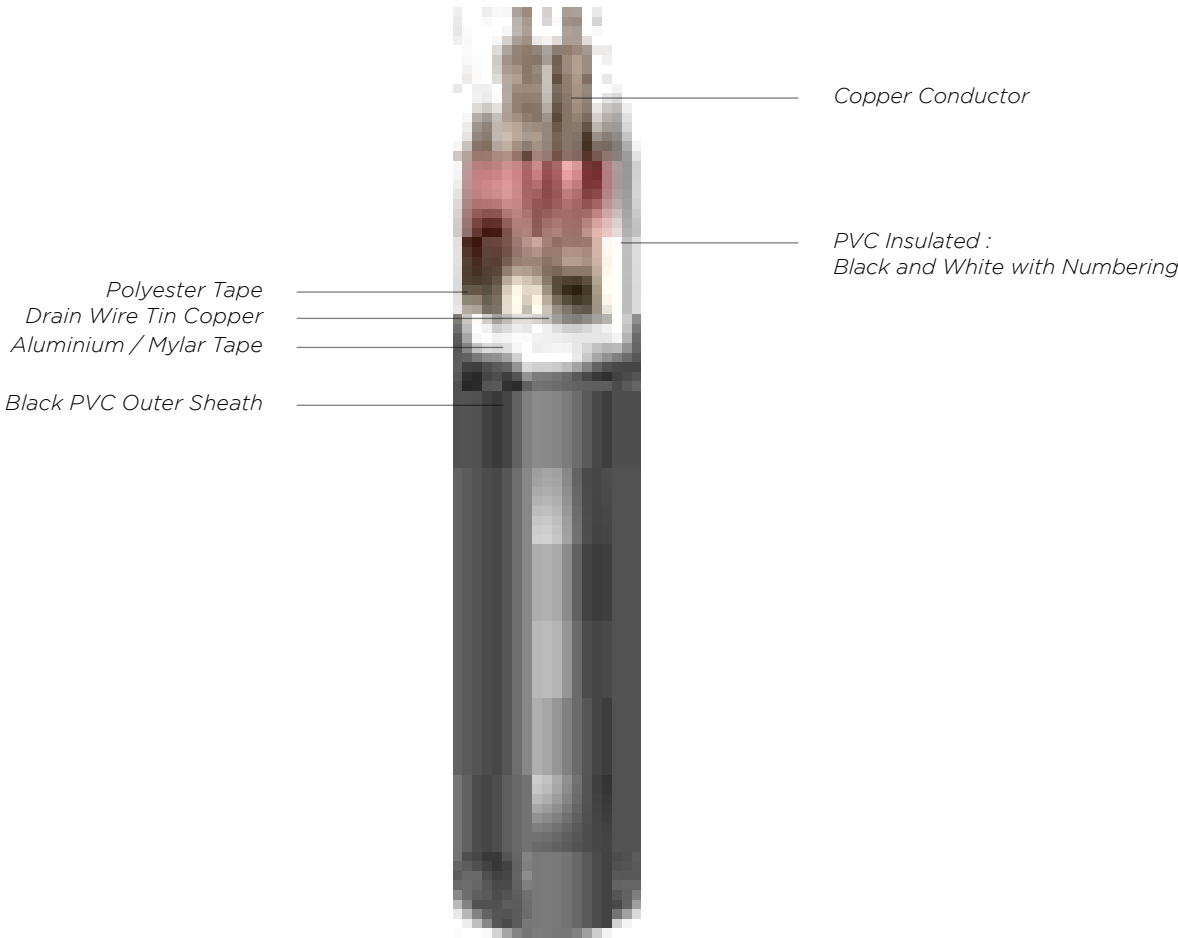

Application

Used for the transmission of measuring data signals in power stations and industrial plants. This cable is suitable for fixed indoor,outdoor,or underground installations.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen

Note : Conductor Shape

- 0.5 - 0.75 sqmm supplied in non-compacted circular stranded (rm)
- 1.5 - 2.5 sqmm supplied in non-compacted circular stranded (rm) or solid (re)
- Other size and shape can be discussed

Standard Packing

- Wooden drum @500 meters.
- Length Tolerance per drum $\pm 2\%$
- Other length and type of packing on request.

300/500 V, Instrument Cable

(Cu / PVC / OSCR / PVC)

Standard Spesification : BS-EN 50288-7, IEC 60332-3, IEC-60332-3 Cat.C

**For Insulation colour can be based on Customer Request or Follow Standard.*

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES				
Size			Approx. Overall Diameter	Approx. Cable Weight	Conductor	Min. Insul Resistance	Max. Capacitance at 1 Khz	Max. L/R ratio	AC Voltage Test
					Max. DC Resistance at 20 °C				
mm²			mm	kg/km	ohm/km	M.ohm.km	pF/m	µH/ Ω	Volt/1 minutes
2P	x	0.5	10.10	96	36.000	25	250	25	1000
2P	x	0.75	10.80	113	24.500	25	250	25	1000
2P	x	1	11.50	132	18.462	25	250	40	1000
2P	x	1.5	13.90	183	12.100	25	250	40	1000
4P	x	0.5	13.50	160	36.000	25	250	25	1000
4P	x	0.75	14.50	192	24.500	25	250	25	1000
4P	x	1	15.20	217	18.462	25	250	40	1000
4P	x	1.5	18.80	319	12.100	25	250	40	1000
6P	x	0.5	14.50	206	36.000	25	250	25	1000
6P	x	0.75	15.80	258	24.500	25	250	25	1000
6P	x	1	16.60	294	18.462	25	250	40	1000
6P	x	1.5	20.50	436	12.100	25	250	40	1000
8P	x	0.5	17.60	272	36.000	25	250	25	1000
8P	x	0.75	19.00	331	24.500	25	250	25	1000
8P	x	1	20.20	389	18.462	25	250	40	1000
8P	x	1.5	24.80	565	12.100	25	250	40	1000
10P	x	0.5	19.10	329	36.000	25	250	25	1000
10P	x	0.75	20.90	413	24.500	25	250	25	1000
10P	x	1	21.90	473	18.462	25	250	40	1000
10P	x	1.5	27.20	704	12.100	25	250	40	1000
12P	x	0.5	21.50	385	36.000	25	250	25	1000
12P	x	0.75	23.50	485	24.500	25	250	25	1000
12P	x	1	24.70	556	18.462	25	250	40	1000
12P	x	1.5	30.70	830	12.100	25	250	40	1000
16P	x	0.5	23.40	487	36.000	25	250	25	1000
16P	x	0.75	25.50	615	24.500	25	250	25	1000
16P	x	1	26.90	707	18.462	25	250	40	1000
16P	x	1.5	33.40	1,061	12.100	25	250	40	1000
20P	x	0.5	27.00	604	36.000	25	250	25	1000
20P	x	0.75	29.20	748	24.500	25	250	25	1000
20P	x	1	31.00	878	18.462	25	250	40	1000
20P	x	1.5	38.60	1,318	12.100	25	250	40	1000
24P	x	0.5	30.20	722	36.000	25	250	25	1000
24P	x	0.75	33.00	911	24.500	25	250	25	1000
24P	x	1	35.00	1,067	18.462	25	250	40	1000
24P	x	1.5	43.60	1,598	12.100	25	250	40	1000

**Further information about derating factors for arrangement can be found on supplementary technical information.*


PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES				
Size			Approx. Overall Diameter	Approx. Cable Weight	Conductor	Min. Insul Resistance	Max. Capacitance at 1 Khz	Max. L/R ratio	AC Voltage Test
					Max. DC Resistance at 20 °C				
mm²			mm	kg/km	ohm/km	M.ohm.km	pF/m	µH/ Ω	Volt/1 minutes
2T	x	0.5	10.70	119	36.000	25	250	25	1000
2T	x	0.75	11.70	148	24.500	25	250	25	1000
2T	x	1	12.20	167	18.462	25	250	40	1000
2T	x	1.5	14.80	237	12.100	25	250	40	1000
4T	x	0.5	14.30	204	36.000	25	250	25	1000
4T	x	0.75	15.40	249	24.500	25	250	25	1000
4T	x	1	16.40	292	18.462	25	250	40	1000
4T	x	1.5	20.00	424	12.100	25	250	40	1000
6T	x	0.5	15.60	277	36.000	25	250	25	1000
6T	x	0.75	16.80	341	24.500	25	250	25	1000
6T	x	1	17.90	402	18.462	25	250	40	1000
6T	x	1.5	22.10	602	12.100	25	250	40	1000
8T	x	0.5	18.70	356	36.000	25	250	25	1000
8T	x	0.75	20.40	452	24.500	25	250	25	1000
8T	x	1	21.70	531	18.462	25	250	40	1000
8T	x	1.5	26.70	783	12.100	25	250	40	1000
10T	x	0.5	20.60	445	36.000	25	250	25	1000
10T	x	0.75	22.40	562	24.500	25	250	25	1000
10T	x	1	23.60	648	18.462	25	250	40	1000
10T	x	1.5	29.20	975	12.100	25	250	40	1000
12T	x	0.5	23.10	523	36.000	25	250	25	1000
12T	x	0.75	25.20	663	24.500	25	250	25	1000
12T	x	1	26.60	765	18.462	25	250	40	1000
12T	x	1.5	33.00	1153.37	12.100	25	250	40	1000
16T	x	0.5	25.20	665.24	36.000	25	250	25	1000
16T	x	0.75	27.40	846.05	24.500	25	250	25	1000
16T	x	1	28.90	980.37	18.462	25	250	40	1000
16T	x	1.5	35.90	1484.57	12.100	25	250	40	1000
20T	x	0.5	29.00	826	36.000	25	250	25	1000
20T	x	0.75	31.60	1050.38	24.500	25	250	25	1000
20T	x	1	33.30	1218.09	18.462	25	250	40	1000
20T	x	1.5	41.70	1866.79	12.100	25	250	40	1000
24T	x	0.5	32.50	987.39	36.000	25	250	25	1000
24T	x	0.75	35.40	1255.22	24.500	25	250	25	1000
24T	x	1	37.50	1475.25	18.462	25	250	40	1000
24T	x	1.5	46.80	2230.75	12.100	25	250	40	1000

**Further information about derating factors for arrangement can be found on supplementary technical information.*

300/500 V, Instrument Cable (Cu / XLPE / ISCR / OSCR / PVC / SWA / PVC)

Standard Spesification : BS-EN 50288-7, IEC 60332-3, IEC-60332-3 Cat.C

**For Insulation colour can be based on Customer Request or Follow Standard.*

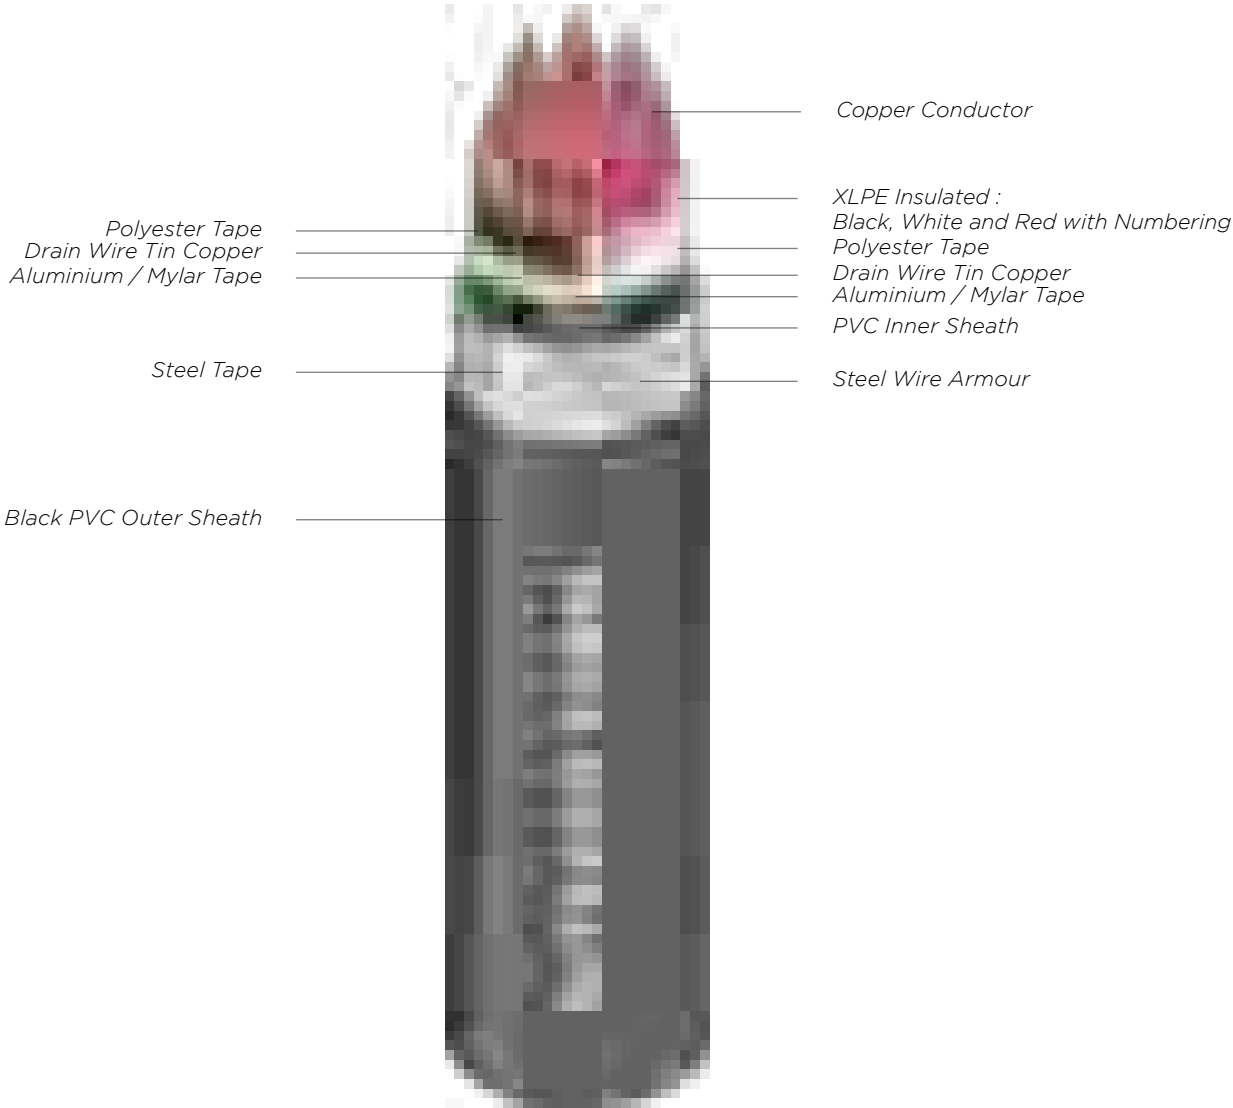

Application

Used for the transmission of measuring data signals in power stations and industrial plants
This cable is suitable for fixed indoor,outdoor,or underground installations.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen

Note : Conductor Shape

- 0.5 - 0.75 sqmm supplied in non-compacted circular stranded (rm)
- 1.5 - 2.5 sqmm supplied in non-compacted circular stranded (rm) or solid (re)
- Other size and shape can be discussed


Standard Packing

- Wooden drum @500 meters.
- Length Tolerance per drum $\pm 2\%$
- Other length and type of packing on request.

300/500 V, Instrument Cable (Cu / PVC / ISCR / OSCR / PVC/ SWA/ PVC)

Standard Spesification : BS-EN 50288-7, IEC 60332-3, IEC-60332-3 Cat.C

**For Insulation colour can be based on Customer Request or Follow Standard.*

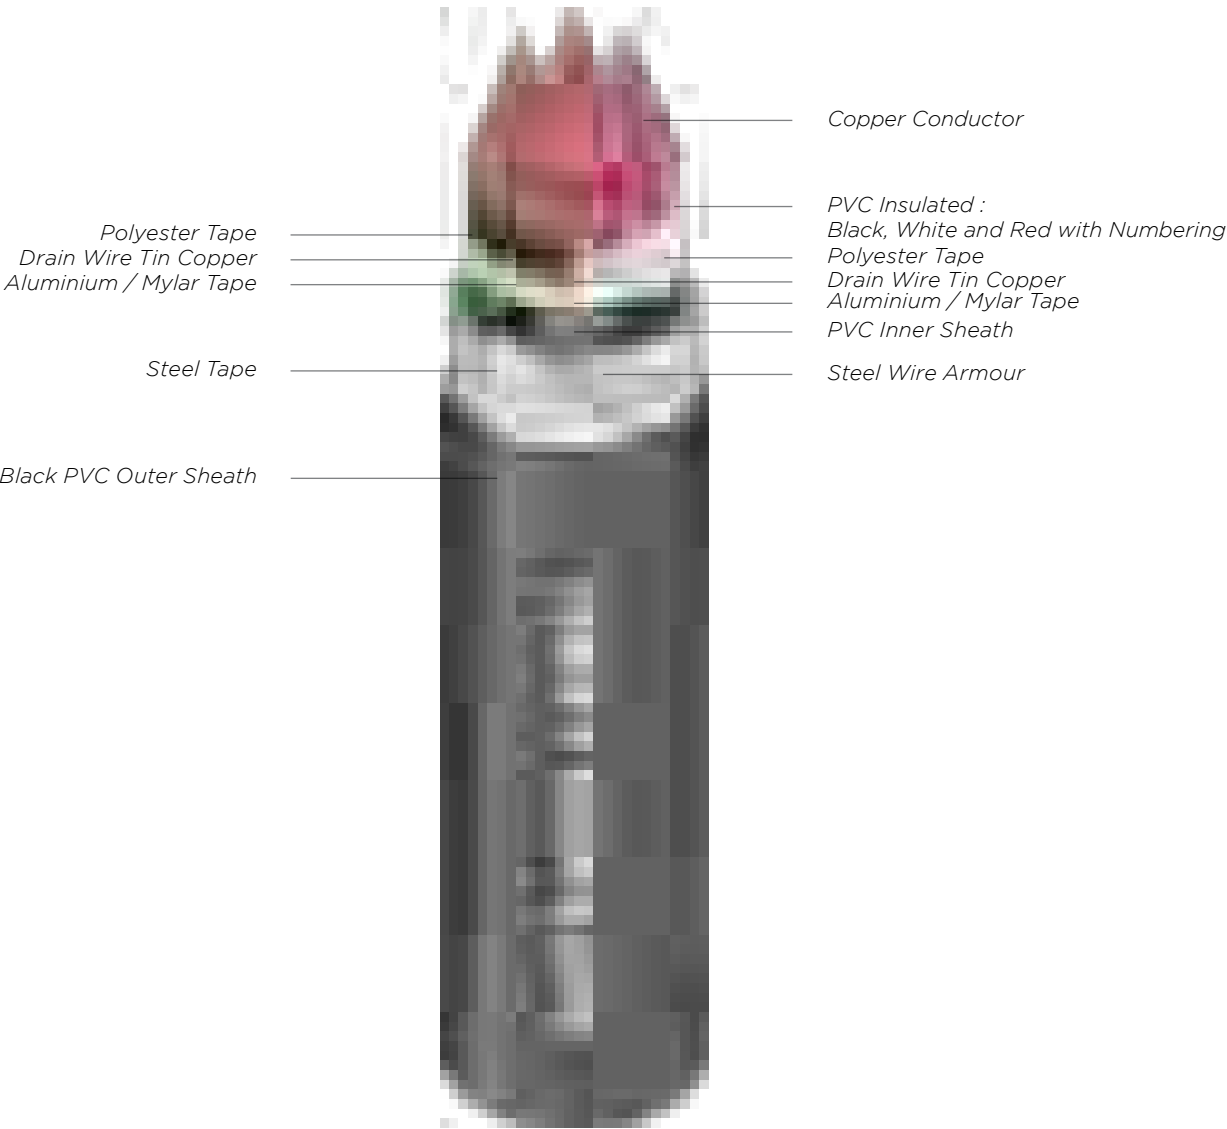

Application

Used for the transmission of measuring data signals in power stations and industrial plants. This cable is suitable for fixed indoor, outdoor, or underground installations.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen

Note : Conductor Shape

- 0.5 - 0.75 sqmm supplied in non-compacted circular stranded (rm)
- 1.5 - 2.5 sqmm supplied in non-compacted circular stranded (rm) or solid (re)
- Other size and shape can be discussed

Standard Packing

- Wooden drum @500 meters.
- Length Tolerance per drum $\pm 2\%$
- Other length and type of packing on request.

300/500 V, Instrument Cable

(Cu / PVC / ISCR / OSCR / PVC/ SWA/ PVC)

Standard Spesification : BS-EN 50288-7, IEC 60332-3, IEC-60332-3 Cat.C

**For Insulation colour can be based on Customer Request or Follow Standard.*

PHYSICAL PROPERTIES				ELECTRICAL PROPERTIES					
Size			Approx. Overall Diameter	Approx. Cable Weight	Conductor	Min. Insul Resistance	Max. Capacitance at 1 Khz	Max. L/R ratio	AC Voltage Test
					Max. DC Resistance at 20 °C				
mm²			mm	kg/km	ohm/km	M.ohm.km	pF/m	µH/ Ω	Volt/1 minutes
2P	x	0.5	15.00	425	36.000	25	250	25	1000
2P	x	0.75	15.90	467	24.500	25	250	25	1000
2P	x	1	16.40	491	18.100	25	250	40	1000
2P	x	1.5	17.40	547	12.100	25	250	40	1000
4P	x	0.5	18.50	585	36.000	25	250	25	1000
4P	x	0.75	19.50	643	24.500	25	250	25	1000
4P	x	1	20.50	696	18.100	25	250	40	1000
4P	x	1.5	21.90	789	12.100	25	250	40	1000
6P	x	0.5	20.80	713	36.000	25	250	25	1000
6P	x	0.75	22.00	787	24.500	25	250	25	1000
6P	x	1	23.00	860	18.100	25	250	40	1000
6P	x	1.5	24.70	987	12.100	25	250	40	1000
8P	x	0.5	22.90	832	36.000	25	250	25	1000
8P	x	0.75	24.50	939	24.500	25	250	25	1000
8P	x	1	25.40	1,014	18.100	25	250	40	1000
8P	x	1.5	27.60	1,184	12.100	25	250	40	1000
10P	x	0.5	25.20	968	36.000	25	250	25	1000
10P	x	0.75	26.80	1,086	24.500	25	250	25	1000
10P	x	1	28.10	1,188	18.100	25	250	40	1000
10P	x	1.5	30.50	1,396	12.100	25	250	40	1000
12P	x	0.5	27.20	1,088	36.000	25	250	25	1000
12P	x	0.75	29.00	1,222	24.500	25	250	25	1000
12P	x	1	30.40	1,343	18.100	25	250	40	1000
12P	x	1.5	33.10	1,586	12.100	25	250	40	1000
16P	x	0.5	30.40	1,309	36.000	25	250	25	1000
16P	x	0.75	32.40	1,480	24.500	25	250	25	1000
16P	x	1	34.10	1,628	18.100	25	250	40	1000
16P	x	1.5	37.20	1,936	12.100	25	250	40	1000
20P	x	0.5	33.00	1,506	36.000	25	250	25	1000
20P	x	0.75	35.20	1,713	24.500	25	250	25	1000
20P	x	1	37.00	1,887	18.100	25	250	40	1000
20P	x	1.5	40.40	2,262	12.100	25	250	40	1000
24P	x	0.5	36.40	1,743	36.000	25	250	25	1000
24P	x	0.75	39.10	2,003	24.500	25	250	25	1000
24P	x	1	41.10	2,210	18.100	25	250	40	1000
24P	x	1.5	44.90	2,648	12.100	25	250	40	1000

**Further information about derating factors for arrangement can be found on supplementary technical information.*


PHYSICAL PROPERTIES				ELECTRICAL PROPERTIES					
Size			Approx. Overall Diameter	Approx. Cable Weight	Conductor	Min. Insul Resistance	Max. Capacitance at 1 Khz	Max. L/R ratio	AC Voltage Test
					Max. DC Resistance at 20 °C				
mm²			mm	kg/km	ohm/km	M.ohm.km	pF/m	µH/ Ω	Volt/1 minutes
2T	x	0.5	15.80	466	36.000	25	250	25	1000
2T	x	0.75	16.50	508	24.500	25	250	25	1000
2T	x	1	17.10	543	18.100	25	250	40	1000
2T	x	1.5	18.40	621	12.100	25	250	40	1000
4T	x	0.5	19.50	658	36.000	25	250	25	1000
4T	x	0.75	20.60	729	24.500	25	250	25	1000
4T	x	1	21.40	789	18.100	25	250	40	1000
4T	x	1.5	23.20	919	12.100	25	250	40	1000
6T	x	0.5	21.90	814	36.000	25	250	25	1000
6T	x	0.75	23.20	909	24.500	25	250	25	1000
6T	x	1	24.40	1,000	18.100	25	250	40	1000
6T	x	1.5	26.20	1,165	12.100	25	250	40	1000
8T	x	0.5	24.20	956	36.000	25	250	25	1000
8T	x	0.75	25.90	1,092	24.500	25	250	25	1000
8T	x	1	27.00	1,189	18.100	25	250	40	1000
8T	x	1.5	29.30	1,421	12.100	25	250	40	1000
10T	x	0.5	26.70	1,122	36.000	25	250	25	1000
10T	x	0.75	28.30	1,275	24.500	25	250	25	1000
10T	x	1	29.80	1,405	18.100	25	250	40	1000
10T	x	1.5	32.30	1,682	12.100	25	250	40	1000
12T	x	0.5	28.80	1,265	36.000	25	250	25	1000
12T	x	0.75	30.70	1,446	24.500	25	250	25	1000
12T	x	1	32.30	1,596	18.100	25	250	40	1000
12T	x	1.5	35.10	1,920	12.100	25	250	40	1000
16T	x	0.5	32.30	1,533	36.000	25	250	25	1000
16T	x	0.75	34.60	1,780	24.500	25	250	25	1000
16T	x	1	36.20	1,956	18.100	25	250	40	1000
16T	x	1.5	39.50	2,368	12.100	25	250	40	1000
20T	x	0.5	35.00	1,784	36.000	25	250	25	1000
20T	x	0.75	37.60	2,072	24.500	25	250	25	1000
20T	x	1	39.50	2,308	18.100	25	250	40	1000
20T	x	1.5	43.10	2,810	12.100	25	250	40	1000
24T	x	0.5	38.60	2,067	36.000	25	250	25	1000
24T	x	0.75	41.50	2,409	24.500	25	250	25	1000
24T	x	1	43.70	2,689	18.100	25	250	40	1000
24T	x	1.5	48.00	3,305	12.100	25	250	40	1000

**Further information about derating factors for arrangement can be found on supplementary technical information.*

300/500 V, LIYCY

Standard Specification : VDE 0812 ; IEC 60332-3-24

**For Insulation colour can be based on Customer Request or Follow Standard.*

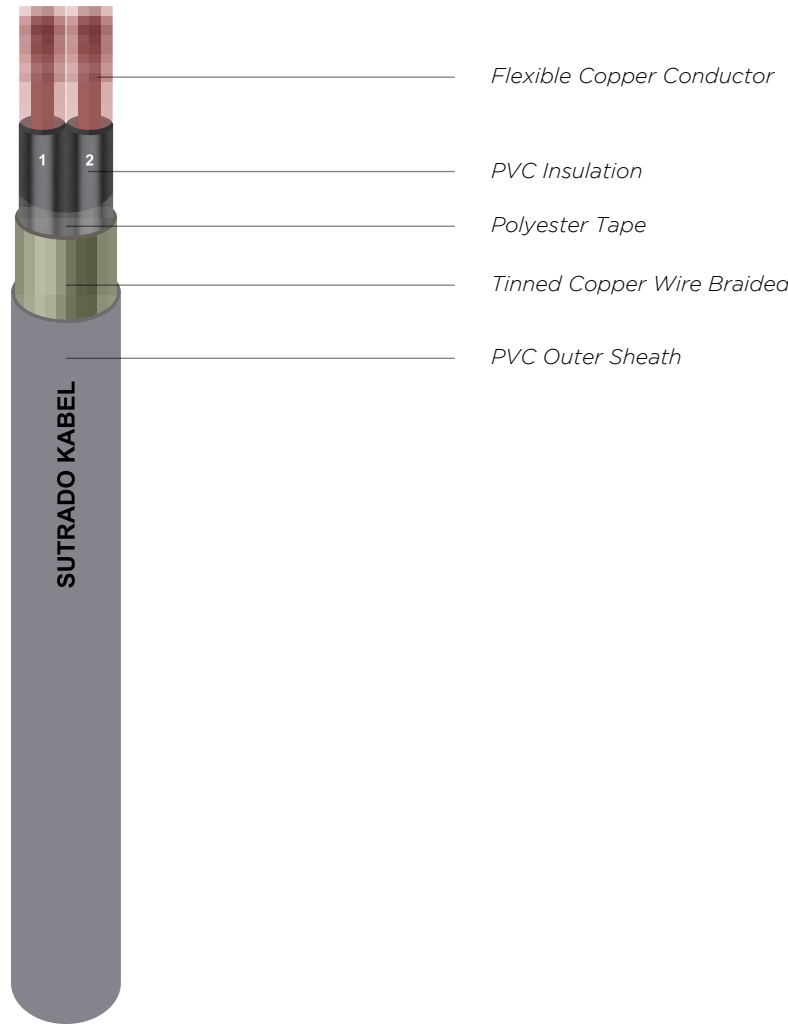

Application

Used for the transmission of measuring data signals in power stations and industrial plants. This cable is suitable for fixed indoor,outdoor,or underground installations.

Core Colour

- JZ : Black cores with white numbering + yellow - green.
- OZ : Black cores with white numbering
- JB : Coloured cores according to VDE 0293 + yellow - green
- OB : Coloured cores according to VDE 0293

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen

Standard Length

Max. 1000 meters or based on customer requirement.

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES		
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		AC Voltage Test
					Max. DC Resistance at 20 °C	Max. AC Resistance at 70 °C	
mm²			mm	kg/km	ohm/km	ohm/km	kV/min
2	x	0.5	8.00	91	39.000	46.664	1000
2	x	0.75	8.50	100	26.000	31.109	1000
2	x	1	8.90	110	19.500	23.332	1000
2	x	1.5	9.80	127	13.300	15.913	1000
2	x	2.5	11.30	167	7.980	9.548	1000
4	x	0.5	8.90	115	39.000	46.664	1000
4	x	0.75	9.50	131	26.000	31.109	1000
4	x	1	10.00	149	19.500	23.332	1000
4	x	1.5	11.20	183	13.300	15.913	1000
4	x	2.5	12.90	244	7.980	9.548	1000
6	x	0.5	9.80	139	39.000	46.664	1000
6	x	0.75	10.70	168	26.000	31.109	1000
6	x	1	11.40	193	19.500	23.332	1000
6	x	1.5	12.50	235	13.300	15.913	1000
6	x	2.5	14.70	329	7.980	9.548	1000
8	x	0.5	11.00	170	39.000	46.664	1000
8	x	0.75	11.70	201	26.000	31.109	1000
8	x	1	12.50	233	19.500	23.332	1000
8	x	1.5	14.10	294	13.300	15.913	1000
8	x	2.5	16.50	417	7.980	9.548	1000
10	x	0.5	12.40	200	39.000	46.664	1000
10	x	0.75	13.60	245	26.000	31.109	1000
10	x	1	14.50	286	19.500	23.332	1000
10	x	1.5	16.40	362	13.300	15.913	1000
10	x	2.5	19.10	505	7.980	9.548	1000
12	x	0.5	12.80	220	39.000	46.664	1000
12	x	0.75	14.00	272	26.000	31.109	1000
12	x	1	14.90	320	19.500	23.332	1000
12	x	1.5	16.90	407	13.300	15.913	1000
12	x	2.5	19.90	585	7.980	9.548	1000
16	x	0.5	14.30	274	39.000	46.664	1000
16	x	0.75	15.50	333	26.000	31.109	1000
16	x	1	16.80	403	19.500	23.332	1000
16	x	1.5	18.80	507	13.300	15.913	1000
16	x	2.5	22.30	738	7.980	9.548	1000
20	x	0.5	15.40	319	39.000	46.664	1000
20	x	0.75	16.90	399	26.000	31.109	1000
20	x	1	18.10	476	19.500	23.332	1000
20	x	1.5	20.50	613	13.300	15.913	1000
20	x	2.5	24.30	898	7.980	9.548	1000
24	x	0.5	17.10	376	39.000	46.664	1000
24	x	0.75	18.50	462	26.000	31.109	1000
24	x	1	20.10	564	19.500	23.332	1000
24	x	1.5	22.80	728	13.300	15.913	1000
24	x	2.5	27.10	1,069	7.980	9.548	1000
32	x	0.5	19.20	493	39.000	46.664	1000
32	x	0.75	21.10	626	26.000	31.109	1000
32	x	1	22.90	769	19.500	23.332	1000
32	x	1.5	26.00	998	13.300	15.913	1000
32	x	2.5	29.90	1,371	7.980	9.548	1000


**Further information about derating factors for arrangement can be found on supplementary technical information.*

300/500 V

Cu / PVC / OSCR / CAA / PVC-FR

(Copper Conductor, PVC Insulated, Overall Screen, Corrugated Aluminium Armor and PVC-FR Sheath)
Standard Specification : BS-EN 50288-7, ICEA S-73-532/NEMA WC57, IEC 60332-3-24 Cat.C

**For Insulation colour can be based on Customer Request or Follow Standard.*

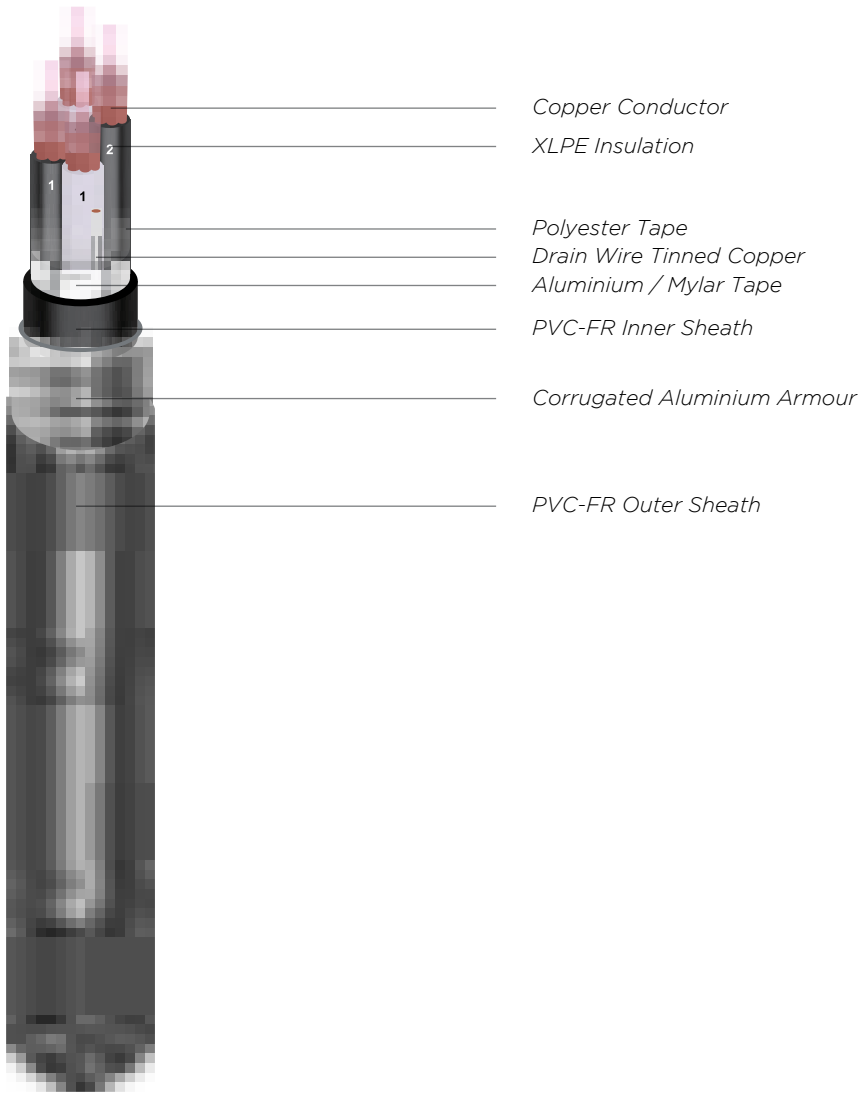

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES				
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor	Min Insul Resistance at 20 °C	Max. Capacitance at 1 KHz	Max. L/R Ratio	AC Voltage Test
					Max. DC Resistance at 20 °C				
AWG			mm	kg/km	ohm/km	M.ohm/km	pF/m	μH/ohm	kV/min
1P	x	16	20.90	530	13.400	25	250	60	2 / 1
1P	x	14	20.40	512	8.460	25	250	60	2 / 1
1P	x	12	21.10	542	5.350	25	250	60	2 / 1
2P	x	16	21.10	519	13.400	25	250	60	2 / 1
2P	x	14	22.60	589	8.460	25	250	60	2 / 1
2P	x	12	25.30	738	5.350	25	250	60	2 / 1
3P	x	16	22.10	587	13.400	25	250	40	2 / 1
3P	x	14	23.30	675	8.460	25	250	60	2 / 1
3P	x	12	26.30	860	5.350	25	250	60	2 / 1
4P	x	16	23.30	670	13.400	25	250	40	2 / 1
4P	x	14	24.80	775	8.460	25	250	60	2 / 1
4P	x	12	29.50	1038	5.350	25	250	60	2 / 1
6P	x	16	25.80	821	13.400	25	250	40	2 / 1
6P	x	14	27.30	961	8.460	25	250	60	2 / 1
6P	x	12	32.90	1360	5.350	25	250	60	2 / 1
8P	x	16	28.00	979	13.400	25	250	40	2 / 1
8P	x	14	31.00	1182	8.460	25	250	60	2 / 1
8P	x	12	35.90	1638	5.350	25	250	60	2 / 1
10P	x	16	32.90	1226	13.400	25	250	40	2 / 1
10P	x	14	35.40	1462	8.460	25	250	60	2 / 1
10P	x	12	41.30	2007	5.350	25	250	60	2 / 1

**Further information about derating factors for arrangement can be found on supplementary technical information.*

Application

Cable are designed for use as instrumentation cables, process control and computer cables in ITC non-classified or labeled circuits up to 150 volts and 5 amps (750 VA).

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen



SOLAR CABLES




1500 VDC

Solar Cable (PV) H1Z2Z2-K

Standard Specification : BS-EN 50618, TUV-2PFG1169

**For Insulation colour can be based on Customer Request or Follow Standard.*

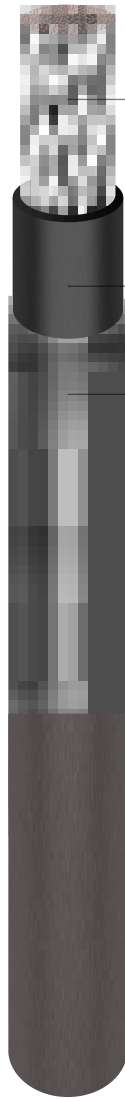

Conductor :
*Flexible Annealed Tinned Copper Wires class 5,
Complied with EN 50618*

Insulation :
*Extruded of Black 125 °C Halogen Free Cross
linked Polyolefin (XLPO)*

Outer Sheath :
*Extruded of Black 125 °C Halogen Free Cross
linked Polyolefin (XLPO)*

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES		
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor	Max. Current - Carrying Capacity at 35 °C	Max. Short Circuit Current at 1 Second
					Max. DC Resistance at 20 °C	In Air	
mm²			mm	kg/km	ohm/km	A	kA
1	x	4	5.70	61	5.090	54	0.57
1	x	6	6.40	83	3.390	69	0.86
1	x	10	7.00	109	1.950	94	1.43
1	x	16	8.30	183	1.240	126	2.29
1	x	25	11.10	290	0.795	174	3.58

**Further information about derating factors for arrangement can be found on supplementary technical information.*

Application

Is used for solar modules, recommendation laying in pipe. Not suitable for permanent installation in water.

Cable Identification

One lines of a distinctive marking shall be performed continuously on a suitable place of the surface of the outer sheath by printing.

Test

The following test shall be carrier out on complete cable and sample in accordance with EN 50618 and the manufacturer standard.

- Construction Test
- Conductor Resistance Test
- AC Voltage Test

Standard Packing

The complete cable shall be wound on a strong reel and lagged securely in order to protect from a possibilities damage during transportation.


The following information shall be provided on the outside of the flange:

- The name of the manufacturer
- The type, voltage grade and size of the cable
- Cable length
- Net and gross weight
- Drum number

The cable end shall be sealed with end cap in order to avoid water penetration.




OVERHEAD CONDUCTOR & CABLES

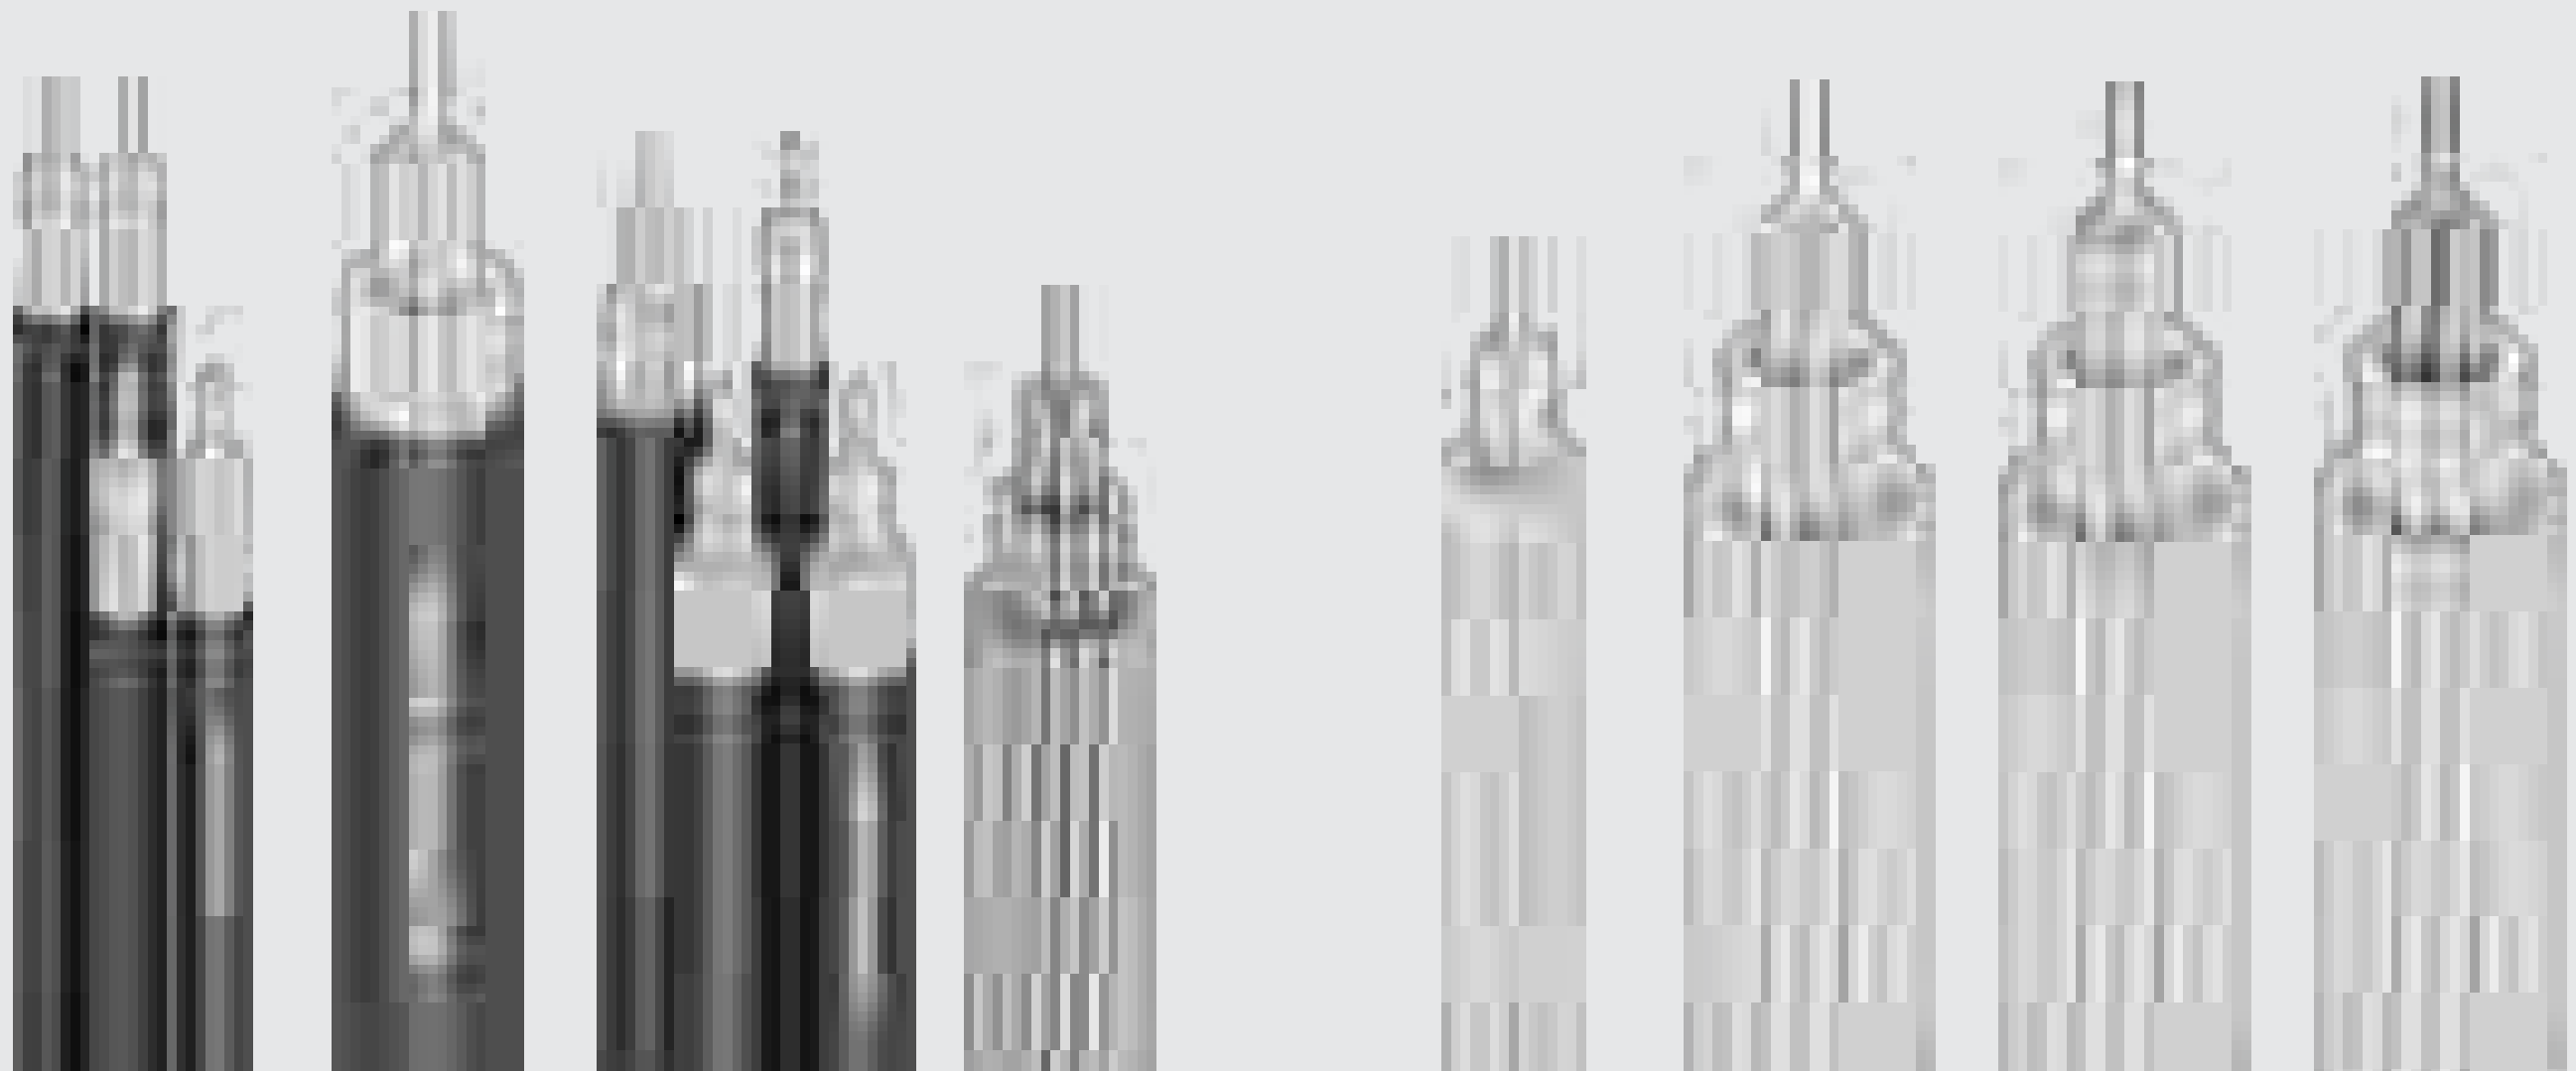

AAC / AAAC

AAC : All Aluminium Conductor / AAAC : All Aluminium Alloy Conductor

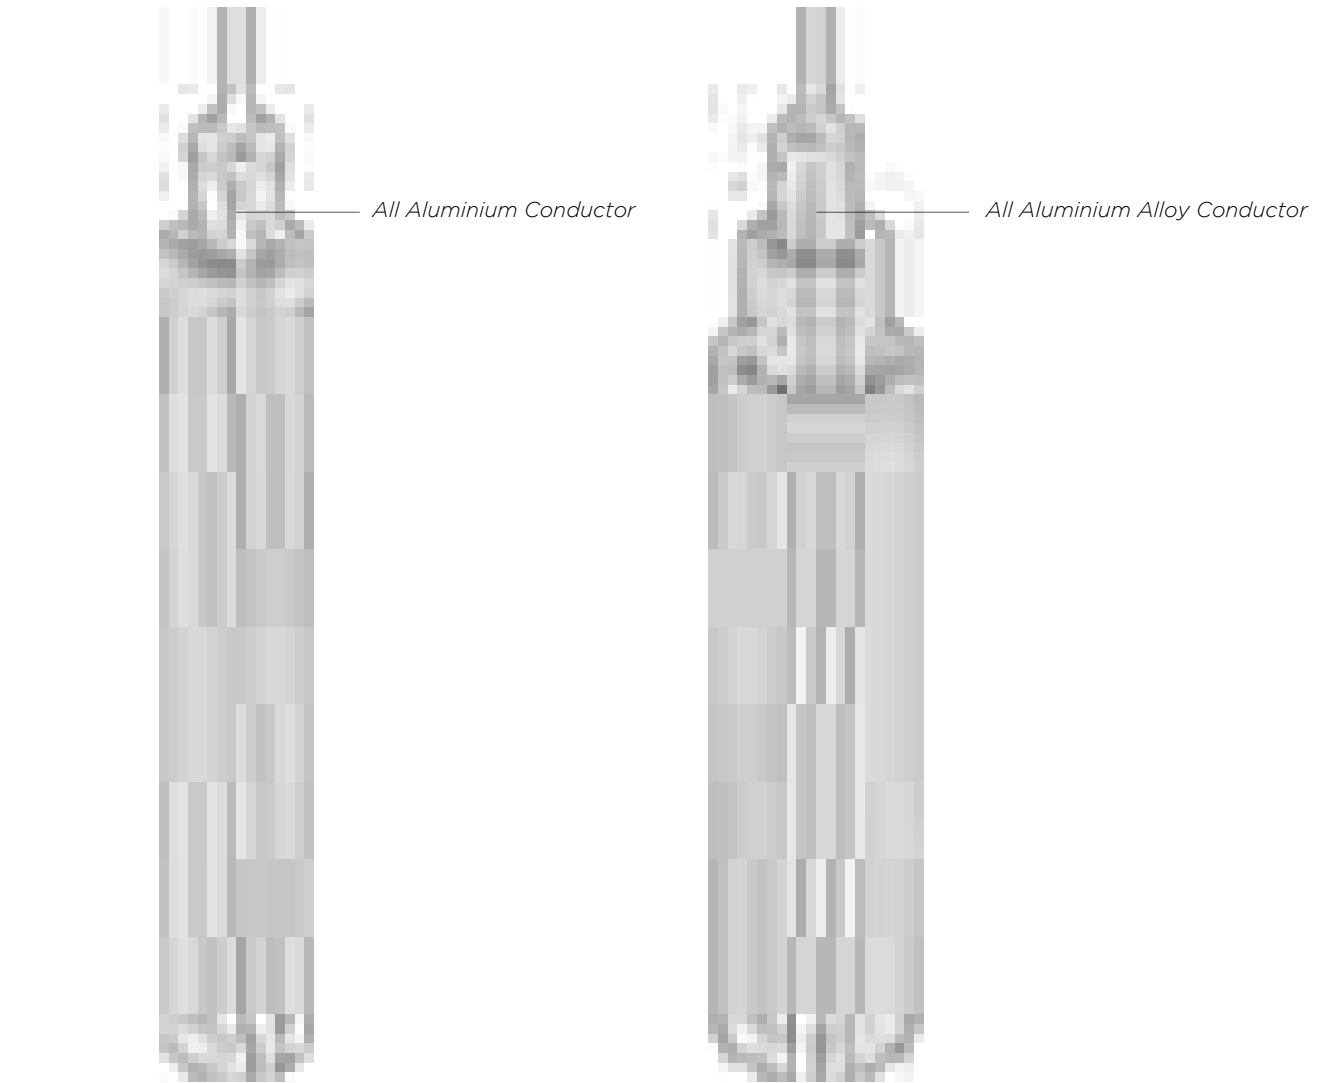

Application

Overhead transmission and distribution.

Specification

- AAC : SPLN 41-6 : 1981
- AAAC : SPLN 41-8 : 1981
- (Other Specifications are available upon request)

Classification

Bare Conductor.

Construction

- AAC : Stranded All Aluminium Conductor
- AAAC : Stranded All Aluminium Alloy Conductor

AAC								
PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES			
Cross Sectional Area		Number and Diameter Wire	Approx.Overall Diameter	Approx. Net Weight	Calculated Breaking Force	DC. Resistance at 20°C	Current Carrying Capacity	Standard Length
Nominal Size	Actual Size							
mm²	mm²	pcs/mm	mm	kg/km	kg	ohm/km	A	m
16	16.84	7/1.75	5.25	46	310	1.700	110	2,000
25	27.83	7/2.25	6.75	76	490	1.029	145	2,000
35	34.36	7/2.50	7.50	94	590	0.833	180	2,000
50	49.48	7/3.00	9.00	135	810	0.579	225	2000
50	45.70	19/1.75	8.75	125	835	0.630	225	2,000
55	58.07	7/3.25	9.75	158	935	0.493	235	2,000
70	75.55	19/2.25	11.25	206	1,040	0.381	270	2,000
95	93.27	19/2.50	12.50	254	1,560	0.308	340	2,000
100	99.30	7/4.25	12.75	271	1,540	0.288	350	1,000
120	112.85	19/2.75	13.75	308	1,890	0.255	390	1,000
150	157.62	19/3.25	16.25	430	2,530	0.183	455	1,000
150	147.12	37/2.25	15.75	401	2,575	0.196	455	1,000
185	181.62	37/2.50	17.50	495	3,110	0.159	520	1,000
200	189.85	19/3.75	18.75	572	3,290	0.137	565	1,000
240	242.54	61/2.25	20.25	661	4,020	0.119	625	1,000
240	238.76	19/4.00	20.00	651	3,700	0.121	625	500
300	299.44	61/2.50	22.50	817	4,850	0.097	710	500
400	431.18	61/3.00	27.00	1,176	6,675	0.067	855	500
500	506.04	61/3.25	35.75	1,380	7,700	0.057	990	500
630	643.24	91/3.00	33.00	1,754	9,960	0.045	1,140	500
800	754.92	91/3.25	35.75	2,059	11,480	0.038	1,340	500
1,000	1,005.07	91/3.75	41.25	2,741	14,925	0.029	1,540	500


* Further information about derating factor for certain cable arrangement can be found on supplementary technical information

AAAC								
PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES			
Cross Sectional Area		Number and Diameter Wire	Approx.Overall Diameter	Approx. Net Weight	Calculated Breaking Force	DC. Resistance at 20°C	Current Carrying Capacity	Standard Length
Nominal Size	Actual Size							
mm²	mm²	pcs/mm	mm	kg/km	kg	ohm/km	A	m
16	16.84	7/1.75	5.25	46	480	1.955	105	2,000
25	27.83	7/2.25	6.75	76	790	1.183	135	2,000
35	34.36	7/2.50	7.50	94	980	0.958	170	2,000
50	49.48	7/3.00	9.00	135	1,410	0.665	210	2000
50	45.70	19/1.75	8.75	125	1,300	0.724	210	2,000
55	58.07	7/3.25	9.75	158	1,655	0.567	220	2,000
70	75.55	19/2.25	11.25	206	2,150	0.438	255	2,000
95	93.27	19/2.50	12.50	254	2,660	0.355	320	2,000
100	99.30	7/4.25	12.75	271	2,830	0.332	325	1,000
120	112.85	19/2.75	13.75	308	3,220	0.293	365	1,000
150	157.62	19/3.25	16.25	430	4,490	0.210	425	1,000
150	147.12	37/2.25	15.75	401	4,190	0.225	425	1,000
185	181.60	37/2.50	17.50	495	5,175	0.183	490	1,000
240	238.76	19/4.00	20.00	651	6,805	0.139	585	1,000
240	242.54	61/2.25	20.25	661	6,910	0.137	585	1,000
300	299.44	61/2.50	22.50	817	8,530	0.111	670	500
400	431.18	61/3.00	27.00	1,176	12,290	0.077	810	500
500	506.04	61/3.25	29.25	1,380	14,420	0.066	930	500
630	643.24	91/3.00	33.00	1,754	18,330	0.052	1,085	500
800	754.92	91/3.25	35.75	2,059	21,515	0.044	1,255	500
1,000	1,005.07	91/3.75	41.25	2,741	28,640	0.033	1,450	500

* Further information about derating factor for certain cable arrangement can be found on supplementary technical information

AAAC/S

All Aluminium Alloy Conductor with XLPE Insulated

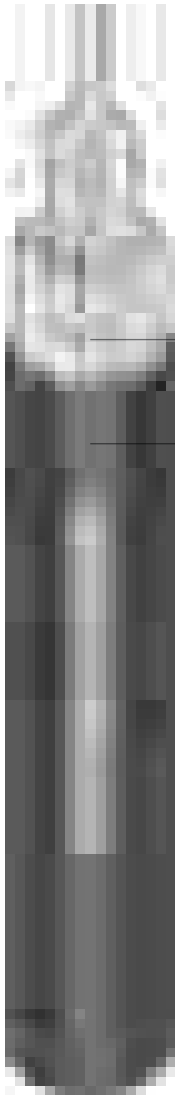

All Aluminium Alloy Conductor

XLPE Insulated

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES			
Cross Sectional Area	Number and Diameter Wire	Insulation Thickness	Approx. Overall Diameter	Approx. Cable Weight	Calculated Breaking Force	DC. Resistance at 20°C	Current Carrying Capacity	Standard Length
Nominal Size								
mm²	pcs/mm	mm	mm	kg/km	kg	ohm/km	A	m
35	7/2.50	3.00	14.00	199	980	0.958	167	1000
50	19/1.75	3.00	15.00	240	1300	0.724	200	1000
70	19/2.25	3.00	18.00	349	2150	0.438	275	1000
95	19/2.50	3.00	19.00	412	2660	0.355	315	1000
100	7/4.25	3.00	19.00	441	2830	0.332	325	1000
120	19/2.75	3.00	20.00	480	3220	0.293	356	1000
150	19/3.25	3.00	23.00	632	4490	0.210	423	1000
150	37/2.25	3.00	22.00	593	4190	0.225	423	1000
185	37/2.50	3.00	24.00	708	5170	0.183	484	1000
240	61/2.25	3.00	27.00	905	6910	0.139	596	1000
300	61/2.50	3.00	29.00	1088	8530	0.111	670	1000
400	61/3.00	3.00	34.00	1506	12290	0.077	810	1000
500	61/3.25	3.00	36.00	1740	14420	0.066	930	1000
630	91/3.00	3.00	40.00	2160	18330	0.052	1085	1000
800	91/3.25	3.00	42.00	2503	21515	0.044	1255	1000
1000	91/3.75	3.00	48.00	3265	28640	0.033	1450	1000

*Further information about derating factors for arrangement can be found on supplementary technical information.

Application

Used for overhead 20 kV transmission line.

Specification

SPLN 41-10 or Manufacture Spec
(Other specifications are available upon request)

Construction

- Conductor
Single core, Aluminium Conductors.
- Insulation
Extrude of XLPE.


Classification

Medium Voltage Cable

ACSR

Aluminium Conductor Steel Reinforced

Standard Specification : SPLN 41-7 : 1981

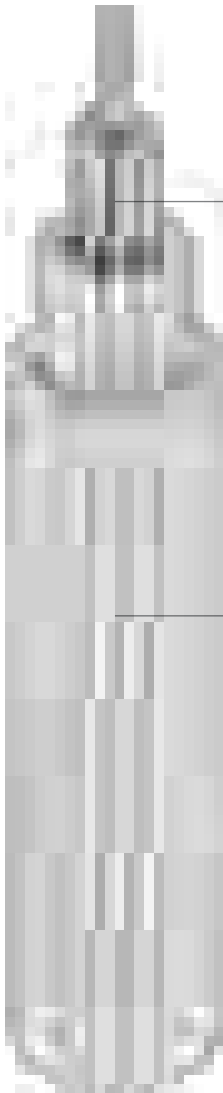

Galvanized Steel Wire with Grease

All Aluminium Conductor

Application

Used for overhead distribution and transmission

Specification

SPLN 41-7 : 1981
(Other specifications are available upon request)

Construction

- Inner Laying
Solid or Stranded Galvanized Steel Wire.
- Outer Laying
Stranded All Aluminium Conductor (AAC)

Classification

Bare Conductor


PHYSICAL PROPERTIES						ELECTRICAL PROPERTIES			
Cross Sectional Area		No. of Wire		Approx. Overall Diameter	Approx. Net Weight	DC. Resistance at 20°C	Current Carrying Capacity	Calculated Breaking Force	Standard Length
Nominal Size	Actual Size	Al	Steel						
mm²	mm²	pcs	pcs	mm	kg/km	ohm/km	A	N	m
16/2.5	15.3/2.55	6/1.80	1/1.80	5.40	63	1.8790	100	5.950	2000
25/4	23.8/4.0	6/2.25	1/2.25	6.80	98	1.2030	135	9.200	2000
35/6	34.3/5.7	6/2.70	1/2.70	8.10	140	0.8353	165	12.650	2000
44/32	44.0/31.7	24/2.00	7/2.40	11.20	379	0.6573	205	43.000	2000
50/8	48.3/8.0	6/3.20	1/3.20	9.60	197	0.5946	205	17.100	2000
50/30	51.2/29.8	12/2.33	7/2.33	11.70	383	0.5644	225	43.800	2000
70/12	69.9/11.4	26/1.85	7/1.44	11.70	284	0.4130	260	26.800	2000
95/15	94.4/15.3	26/2.25	7/1.67	13.60	383	0.3053	315	35.750	2000
95/55	96.5/56.3	12/3.20	7/3.20	16.00	723	0.2992	335	79.350	2000
105/75	105.7/75.5	14/3.10	19/2.25	17.50	908	0.2736	355	108.450	2000
120/20	121.6/19.8	26/2.44	7/1.90	15.50	494	0.2374	370	45.650	2000
120/70	122.0/71.3	12/3.60	7/3.60	18.00	915	0.2364	385	100.000	2000
125/30	127.9/29.8	30/2.33	7/2.33	16.10	593	0.2259	385	57.600	2000
150/25	149.9/24.2	26/2.70	7/2.10	17.10	604	0.1939	420	55.250	2000
170/40	171.8/40.1	30/2.70	7/2.70	13.90	796	0.1682	465	76.750	2000
185/30	183.8/29.8	26/3.00	7/2.33	19.00	745	0.1571	480	66.200	2000
210/35	209.1/34.1	26/3.20	7/2.49	20.30	848	0.1380	520	74.900	2000
210/50	212.1/49.5	30/3.00	7/3.00	21.00	982	0.1363	530	93.900	2000
230/30	230.9/29.8	24/3.50	7/2.33	21.00	873	0.1249	555	73.100	2000
240/40	243.7/39.5	26/3.45	7/2.68	21.90	985	0.1188	575	86.400	2000
265/35	263.7/34.1	24/3.74	7/2.49	22.40	997	0.1094	600	83.050	2000
300/50	304.3/49.5	26/3.86	7/3.00	24.40	1,234	0.0949	755	107.000	2000
305/40	304.6/39.5	54/2.68	7/2.68	24.10	1,153	0.0949	750	99.400	2000
340/30	339.3/29.8	48/3.00	7/2.33	25.00	1,169	0.0853	800	92.900	2000
380/50	381.7/49.5	54/3.00	7/3.00	27.00	1,445	0.0757	865	123.100	2000
385/35	386.0/34.1	48/3.20	7/2.49	26.70	1,331	0.0749	870	104.800	2000
435/55	434.3/56.3	54/3.20	7/3.20	28.80	1,644	0.0665	940	136.450	2000
450/40	448.7/39.5	48/3.45	7/2.68	28.70	1,546	0.0645	955	120.750	2000
490/65	490.3/63.6	54/3.40	7/3.40	30.60	1,856	0.0589	1,015	153.100	1000
495/35	494.4/34.1	45/3.74	7/2.49	29.90	1,626	0.0585	1,015	121.800	1000
510/45	510.5/45.3	48/3.68	7/2.87	30.70	1,761	0.0566	1,035	136.650	1000
550/70	549.7/71.3	54/3.60	7/3.60	32.40	2,080	0.0526	1,090	170.600	1000
560/50	561.7/49.5	48/3.86	7/3.00	32.20	1,935	0.0515	1,100	148.950	1000
570/40	571.2/39.5	45/4.02	7/2.68	32.20	1,879	0.0506	1,110	136.200	1000
650/45	653.5/45.3	45/4.30	7/2.87	34.40	2,151	0.0443	1,205	155.500	1000
680/85	678.6/86.0	54/4.00	19/2.40	36.00	2,554	0.0426	1,245	206.250	1000
1,045/45	1,045.6/45.3	72/4.30	7/2.87	43.00	3,219	0.0277	1,600	217.600	500

*Further information about derating factors for arrangement can be found on supplementary technical information.

ACSR

Aluminium Conductor Steel Reinforced

Standard Specification : ASTM B232

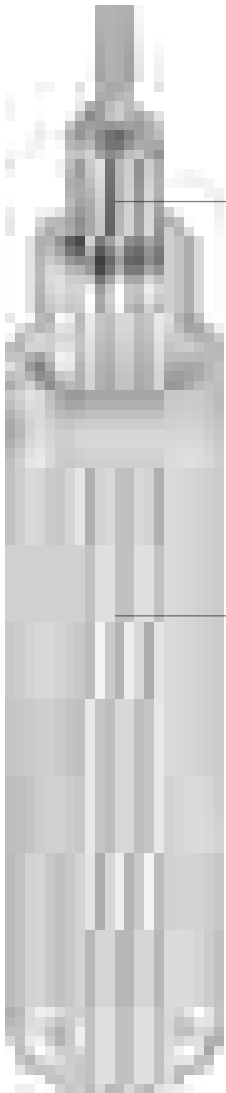

Galvanized Steel Wire with Grease

All Aluminium Conductor

PHYSICAL & ELECTRICAL PROPERTIES														
SKU Word	Size	STR	Dia.	Dia. Steel	Dia. Steel Core	Dia. Cable OD	Weight	Weight Steel	Weight Total	IASC (min.)	Rate Breaking Strength	DC	AC	AC
-	AWG or Kcmil	AL or STL	inches	inches	inches	inches	Pound/1000ft	Pound/1000ft	Pound/1000ft	%	lbf	Ohm/Mile	Ohm/Mile	Ohm/Mile
Turkey	6	6/1	0.0661	0.0661	0.0661	0.198	24.5	11.6	36.1	61	1190	1.3092	1.4475	1.7858
Swan	4	6/1	0.0834	0.0834	0.0834	0.250	39.0	18.4	57.4	61	1860	0.8222	0.9115	1.1421
Swanate	4	7/1	0.0772	0.1029	0.1029	0.257	39.0	28.0	67.0	61	2360	0.8245	0.9014	1.1562
Sparrow	2	6/1	0.1052	0.1052	0.1050	0.316	62.0	29.3	91.3	61	2850	0.5183	0.5748	0.7370
Sparate	2	7/1	0.0974	0.1299	0.1299	0.325	62.0	44.7	106.7	61	3640	0.5192	0.5680	0.7437
Robin	1	6/1	0.1181	0.1181	0.1181	0.354	78.2	36.9	115.1	61	3550	0.4106	0.4557	0.5924
Raven	1/0	6/1	0.1327	0.1327	0.1327	0.398	98.7	46.6	145.3	61	4380	0.3254	0.3616	0.4765
Quail	2/0	6/1	0.1489	0.1489	0.1489	0.447	124.3	58.7	183.0	61	5300	0.2586	0.2872	0.3860
Pigeon	3/0	6/1	0.1672	0.1672	0.1672	0.502	156.7	74.0	230.7	61	6620	0.2046	0.2280	0.3129
Penguin	4/0	6/1	0.1878	0.1878	0.1878	0.563	197.7	93.4	291.1	61	8350	0.1624	0.1816	0.2547
Waxwing	266.8	18/1	0.1217	0.1217	0.1217	0.609	250.3	39.2	289.5	61	6880	0.1290	0.1460	0.1726
Partridge	266.8	26/7	0.1013	0.0788	0.2364	0.642	251.7	115.6	367.2	61	11130	0.1304	0.1445	0.1708
Ostrich	300.0	26/7	0.1074	0.0835	0.2505	0.680	282.9	129.8	412.7	61	12700	0.1155	0.1285	0.1519
Merlin	336.4	18/1	0.1367	0.1367	0.1367	0.683	315.8	49.5	365.2	61	8680	0.1028	0.1157	0.1368
Linnet	336.4	26/7	0.1137	0.1137	0.2642	0.720	317.1	145.4	462.5	61	14100	0.1031	0.1124	0.1355
Oriole	336.4	30/7	0.1059	0.1059	0.3177	0.741	318.2	208.9	527.1	61	17800	0.1034	0.1138	0.1346
Chickadee	397.5	18/1	0.1486	0.1486	0.1486	0.743	373.1	58.5	431.6	61	9940	0.0871	0.0981	0.1159
Brant	397.5	24/7	0.1287	0.0858	0.2574	0.772	375.0	137.0	512.0	61	14500	0.0873	0.0976	0.1152
Ibis	397.5	25/7	0.1236	0.0961	0.2882	0.783	374.7	171.9	546.6	61	16300	0.0874	0.0972	0.1148
Lark	397.5	30/7	0.1151	0.1151	0.3453	0.806	375.8	246.8	622.6	61	20300	0.0878	0.0965	0.1141
Pelican	477.0	18/1	0.1628	0.1628	0.1628	0.814	447.8	70.2	518.0	61	11800	0.0722	0.0819	0.0966
Flicker	477.0	24/7	0.1410	0.0940	0.2820	0.846	450.1	164.4	514.5	61	17200	0.0728	0.0813	0.0960
Hawk	477.0	26/7	0.1354	0.1053	0.3159	0.858	449.6	205.4	656.0	61	19500	0.0728	0.0809	0.0956

*Further information about derating factors for arrangement can be found on supplementary technical information.

Application

Used for overhead distribution and transmission

Specification

ASTM B232
(Other specifications are available upon request)

Construction


- Inner Laying
Solid or Stranded Galvanized Steel Wire.
- Outer Laying
Stranded All Aluminium Conductor (AAC)

Classification

Bare Conductor

ACSR / AS

Aluminium Conductor Aluminium Clad Steel Reinforced

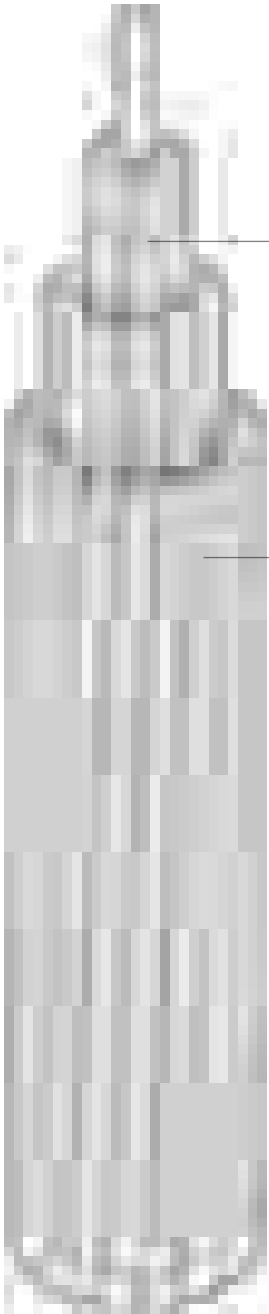

Application

Used for overhead distribution and transmission

Specification

IEC 61089, SPLN T3.001-1 ; 2015
(Other specifications are available upon request)

Construction

- Inner Laying
Solid or Stranded Aluminium Clad Steel Wire.
- Outer Laying
Stranded All Aluminium Conductor (AAC)

Classification


Bare Conductor

PHYSICAL PROPERTIES						ELECTRICAL PROPERTIES			
Cross Sectional Area		No. of Wire		Approx. Overall Diameter	Approx. Net Weight	DC. Resistance at 20°C	Current Carrying Capacity	Calculated Breaking Force	Standard Length
Nominal Size	Actual Size	Al	Steel						
mm²	mm²	pcs	pcs	mm	kg/km	ohm/km	A	kN	m
16	15.4/2.60	6/1.81	1/1.80	5.43	59	1.7923	148	5.9	2.000
25	24.1/4.0	6/2.26	1/2.26	6.78	92	1.1471	197	9.00	2.000
40	37.3/6.4	6/2.85	1/2.85	8.55	147	0.7169	266	12.41	2.000
63	60.4/10.1	6/3.58	1/3.58	10.74	232	0.4552	356	21.17	2.000
100	95.9/16.0	6/4.51	1/4.51	13.53	368	0.2868	479	31.84	2.000
125	123.0/6.8	18/2.95	7/2.95	14.75	384	0.2304	548	29.18	2.000
125	120.6/19.6	26/2.43	7/1.89	15.39	464	0.2308	554	44.49	2.000
160	157.7/8.8	18/3.34	1/3.34	16.70	492	0.1800	642	36.38	2.000
160	153.3/24.9	26/2.76	7/2.13	17.35	589	0.1803	649	56.18	2.000
200	197.7/11.0	18/3.74	1/3.74	18.70	617	0.1400	742	43.62	2.000
200	192.5/31.4	26/3.07	7/2.39	19.45	740	0.1443	749	69.72	2.000
250	244.3/24.0	22/3.76	7/2.67	21.31	818	0.1153	860	67.80	2.000
250	240.2/39.2	26/3.43	7/2.67	21.73	924	0.1154	865	86.58	2.000
315	309.7/21.3	45/2.96	7/1.97	23.67	998	0.0917	994	78.33	2.000
315	302.7/49.2	26/3.85	7/2.99	24.37	1,163	0.0916	1,003	107.58	2.000
400	394.3/27.1	45/3.34	7/2.22	26.70	1,270	0.0722	1,158	97.50	2.000
400	386.8/50.1	54/3.02	7/3.02	27.18	1,402	0.0723	1,163	124.20	2.000
450	442.9/30.6	45/3.54	7/2.36	28.32	1,428	0.0642	1,247	107.48	2.000
450	437.0/56.6	54/3.21	7/3.21	28.89	1,584	0.0642	1,255	139.72	2.000
500	491.7/34.1	45/3.73	7/2.49	29.85	1,586	0.0578	1,333	119.42	1.000
500	484.5/62.8	54/3.38	7/3.38	30.42	1,756	0.0578	1,341	153.99	1.000
560	551.4/38.0	45/3.95	7/2.63	31.59	1,778	0.0516	1,431	133.75	1.000
560	543.6/69.0	54/3.58	19/2.15	32.23	1,969	0.0516	1,440	169.36	1.000
630	620.5/42.8	45/4.19	7/2.79	33.51	2,000	0.0458	1,541	150.47	1.000
630	609.2/77.6	54/3.79	19/2.28	34.14	2,208	0.0459	1,548	190.52	1.000
710	696.7/48.2	45/4.44	7/2.96	35.52	2,247	0.0407	1,657	169.57	1.000
710	688.8/87.4	54/4.03	19/2.42	36.28	2,495	0.0407	1,667	214.72	1.000
800	791.0/34.1	72/3.74	7/2.49	29.91	2,425	0.0361	1,777	167.67	1.000
800	785.2/65.4	84/3.45	7/3.45	37.95	2,553	0.0362	1,783	206.37	1.000
800	776.9/98.6	54/4.28	19/2.57	38.53	2,814	0.0361	1,793	241.94	1.000
900	891.3/38.6	72/3.97	7/2.65	31.77	2,734	0.0321	1,907	188.63	500
900	883.8/73.6	84/3.66	7/3.66	40.26	2,873	0.0321	1,915	224.82	500
1000	988.0/42.8	72/4.18	7/2.79	33.45	3,031	0.0289	2,027	209.59	500
1120	1109.8/46.8	72/4.43	19/1.77	35.43	3,306	0.0258	2,164	233.48	500
1120	1098.2/89.6	84/4.08	19/2.48	44.89	3,648	0.0258	2,173	282.88	500
1250	1238.6/52.2	72/4.68	19/1.87	37.43	3,690	0.0231	2,301	260.58	500
1250	1225.5/100.1	84/4.31	19/2.59	47.43	4,072	0.0231	2,311	315.72	500

*Further information about derating factors for arrangement can be found on supplementary technical information.

0.6/1 (1.2) kV, NFA2X-T

Aerial Bundled Conductor, Twisted Cable

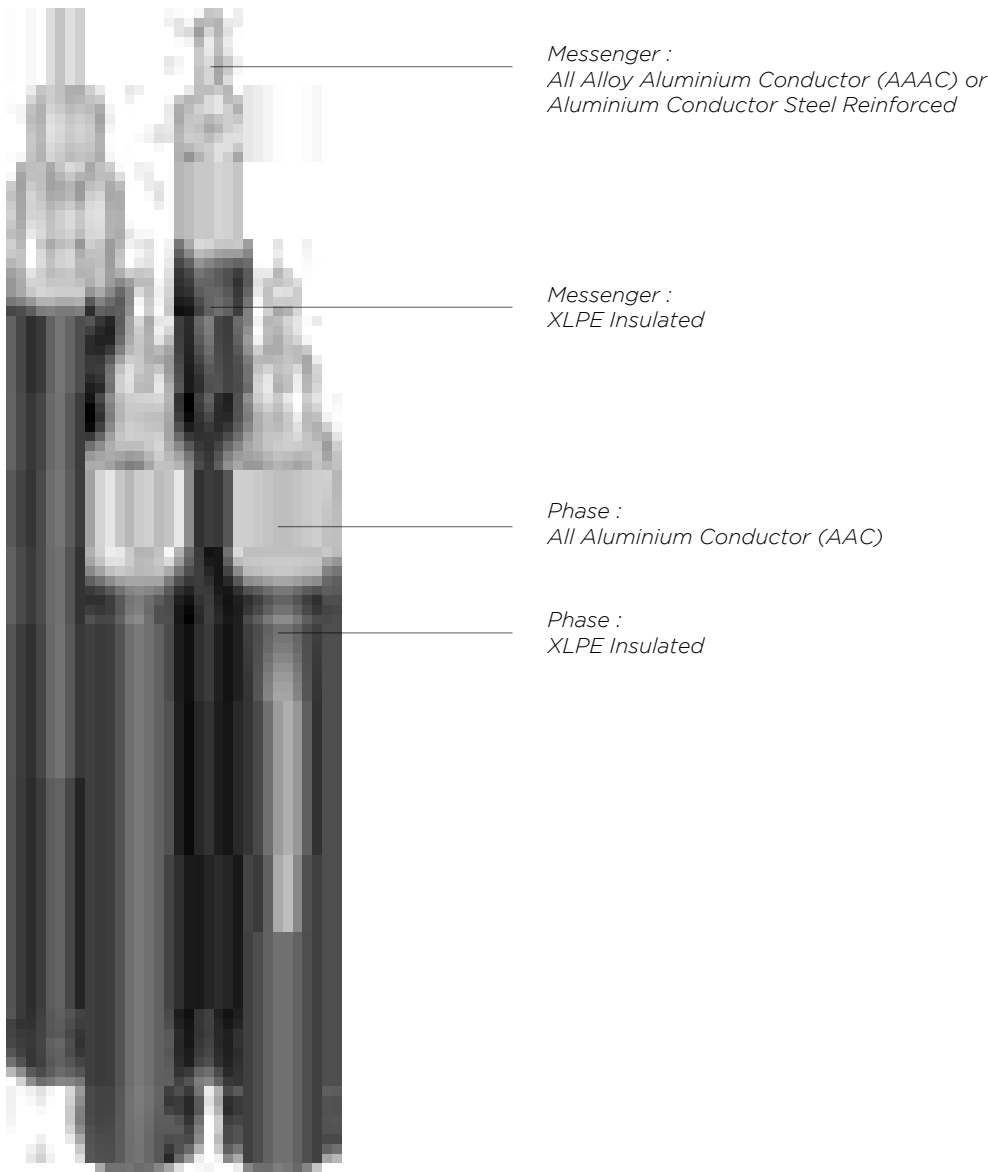

Application

Bundle conductor for overhead distribution network with and without public lighting. (between pole to pole)

Specification

SPLN 42-10 ; 1993, SPLN D3.010-1
(Other specifications are available upon request)

Classification

Low Voltage Cable

Construction

- Conductor
Phase : Stranded All Aluminium conductor (AAC)
Neutral/Messenger : Stranded All Aluminium Alloy Conductor (AAAC) or Aluminium Conductor Steel Reinforced
- Insulation
Extrude of XLPE, capable for continous operation at maximum cable's temperature.

0.6/1 (1.2) kV, NFA2X-T

Aerial Bundled Conductor, Twisted Cable

PHYSICAL PROPERTIES											
Cable Size	Number / Diameter			Insulation Thickness			Approx Diameter			Approx. Twisted Diameter	Approx. Net Weight
	Phasa	Neutral	Lighting	Phasa	Neutral	Lighting	Phasa	Neutral	Lighting		
mm²	pcs/mm	pcs/mm	pcs/mm	mm	mm	mm	mm	mm	mm	mm	kg/m
2x25+25	7/2.13	7/2.13	-	1.40	1.40	-	9.29	9.29	-	19.00	326
2x35+25	7/2.52	7/2.13	-	1.60	1.40	-	10.86	9.29	-	22.00	408
2x50+35	7/3.02	7/2.52	-	1.60	1.60	-	12.36	10.86	-	25.00	555
2x70+50	19/2.17	7/3.02	-	1.80	1.60	-	14.55	12.36	-	30.00	750
2x95+70	19/2.52	19/2.17	-	2.00	1.80	-	16.70	14.55	-	34.00	1,002
3x25+25	7/2.13	7/2.13	-	1.40	1.40	-	9.29	9.29	-	21.00	434
3x35+25	7/2.52	7/2.13	-	1.60	1.40	-	10.86	9.29	-	24.00	558
3x50+35	7/3.02	7/2.52	-	1.60	1.60	-	12.36	10.86	-	27.00	758
3x70+50	19/2.17	7/3.02	-	1.80	1.60	-	14.55	12.36	-	32.00	1,024
3x95+70	19/2.52	19/2.17	-	2.00	1.80	-	16.70	14.55	-	37.00	1,366
3x25+25+2x16	7/2.13	7/2.13	7/1.71	1.400	1.40	1.20	9.29	9.29	7.63	26.52	578
3x35+25+2x16	7/2.52	7/2.13	7/1.71	1.600	1.40	1.20	10.86	9.29	7.63	31.01	702
3x50+35+2x16	7/3.02	7/2.52	7/1.71	1.600	1.60	1.20	12.36	10.86	7.63	35.29	902
3x70+50+2x16	19/2.17	7/3.02	7/1.71	1.800	1.60	1.20	14.55	12.36	7.63	41.54	1,167
3x95+70+2x16	19/2.52	19/2.17	7/1.71	2.000	1.80	1.20	16.70	14.55	7.63	47.68	1,510
3x25+25+1x16	7/2.13	7/2.13	7/1.71	1.400	1.40	1.20	9.29	9.29	7.63	25.09	506
3x35+25+1x16	7/2.52	7/2.13	7/1.71	1.600	1.40	1.20	10.86	9.29	7.63	29.33	630
3x50+35+1x16	7/3.02	7/2.52	7/1.71	1.600	1.60	1.20	12.36	10.86	7.63	33.38	830
3x70+50+1x16	19/2.17	7/3.02	7/1.71	1.800	1.60	1.20	14.55	12.36	7.63	39.30	1,096
3x95+70+1x16	19/2.52	19/2.17	7/1.71	2.000	1.80	1.20	16.70	14.55	7.63	45.11	1,438
SPLN D3.010-1											
2x35+35	7/2.52	Al6/2.73;St1/2.73	-	1.60	1.50	-	10.860	11.290	-	24.03	497
2x50+50	7/3.02	Al6/3.26;St1/3.26	-	1.60	1.60	-	12.360	13.080	-	27.89	679
2x70+70	19/2.17	Al6/3.85;St1/3.85	-	1.80	1.60	-	14.550	14.850	-	31.70	915
3x35+35	7/2.52	Al6/2.73;St1/2.73	-	1.60	1.50	-	10.860	11.290	-	26.92	647
3x50+50	7/3.02	Al6/3.26;St1/3.26	-	1.60	1.60	-	12.360	13.080	-	31.24	882
3x70+70	19/2.17	Al6/3.85;St1/3.85	-	1.80	1.60	-	14.550	14.850	-	35.51	1,189
3x95+95	19/2.52	Al6/2.16;St1/1.68	-	1.80	1.60	-	16.300	16.980	-	40.51	1,544
3x120+95	19/2.84	Al6/2.16;St1/1.68	-	1.80	1.60	-	17.900	16.980	-	42.85	1,793


*Further information about derating factors for arrangement can be found on supplementary technical information.

ELECTRICAL PROPERTIES								
Cable Size	Conductor Resistance at 20°C			Current Carrying Capacity at 35°C		Calculated Breaking Force	Lay Length	
	Phase	Neutral/Messenger	Public Lighting	Phase	Public Lighting		Minimum	Maximum
mm²	ohm/km	ohm/km	ohm/km	A	A	kg	cm	cm
2x25+25	1.200	1.380	-	103	-	712	32	65
2x35+25	0.868	1.380	-	125	-	712	36	73
2x50+35	0.641	0.986	-	154	-	997	41	82
2x70+50	0.443	0.690	-	196	-	1,395	50	100
2x95+70	0.320	0.450	-	242	-	1,932	55	110
3x25+25	1.200	1.380	-	103	-	712	36	73
3x35+25	0.868	1.380	-	125	-	712	41	81
3x50+35	0.641	0.986	-	154	-	997	46	91
3x70+50	0.443	0.690	-	196	-	1,395	56	112
3x95+70	0.320	0.450	-	242	-	1,932	63	125
3x25+25+2x16	1.200	1.200	1.910	103	72	712	36	73
3x35+25+2x16	0.868	1.200	1.910	125	72	712	41	81
3x50+35+2x16	0.641	0.868	1.910	154	72	997	46	91
3x70+50+2x16	0.443	0.641	1.910	196	72	1,395	56	112
3x95+70+2x16	0.320	0.450	1.910	242	72	1,932	63	125
3x25+25+1x16	1.200	1.200	1.910	103	72	712	36	73
3x35+25+1x16	0.868	1.200	1.910	125	72	712	41	81
3x50+35+1x16	0.641	0.868	1.910	154	72	997	46	91
3x70+50+1x16	0.443	0.641	1.910	196	72	1,395	56	112
3x95+70+1x16	0.320	0.450	1.910	242	72	1,932	63	125
SPLN D3.010-1								
2x35+35	0.868	0.836	-	125	-	1,285	36	73
2x50+50	0.641	0.585	-	154	-	1,369	41	82
2x70+70	0.443	0.418	-	196	-	2,450	50	100
3x35+35	0.868	0.836	-	125	-	1,285	41	81
3x50+50	0.641	0.585	-	154	-	1,369	56	91
3x70+70	0.443	0.418	-	196	-	2,450	56	112
3x95+95	0.320	0.308	-	242	-	3,589	63	125
3x120+95	0.253	0.308	-	296	-	3,589	72	144

*Further information about derating factors for arrangement can be found on supplementary technical information.

0.6/1 (1.2) kV, NF2X / NFA2X

Aerial Bundled Conductor, Twisted Cable

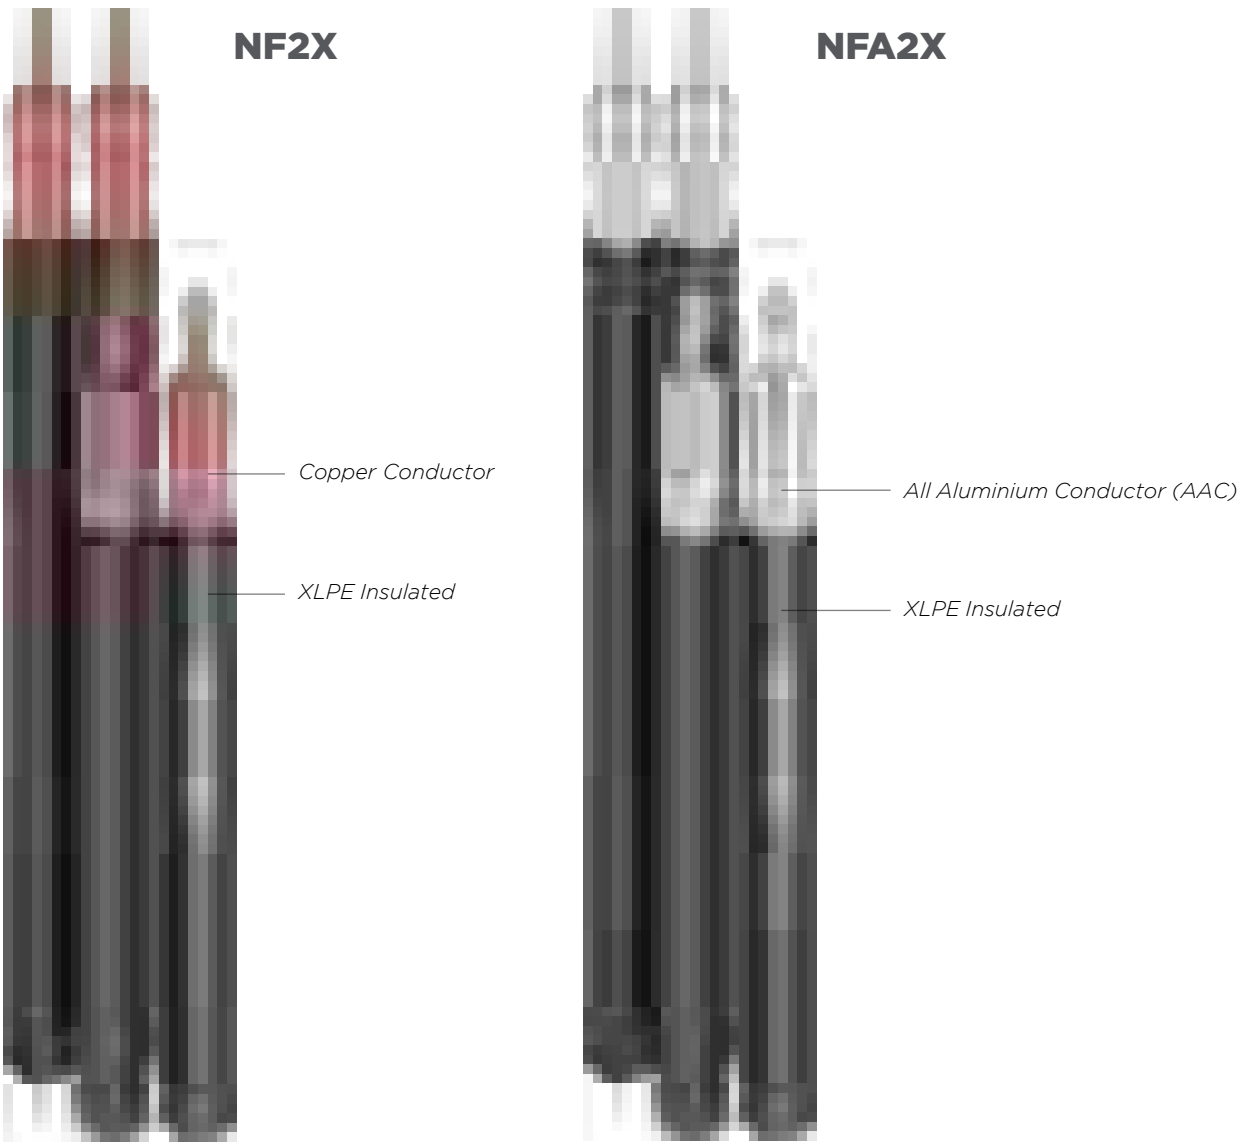

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES		
Cable Size	Insulation Thickness	Approx. Twisted Diameter	Approx. Net. Weight	Max. Conductor Resistance at 20°C	Current Carrying Capacity at 35°C	Calculated Breaking Force	Standard Length
mm²	mm	mm	kg/km	ohm/km	A	kg	m
NF2X (COPPER CONDUCTOR)							
2x6 rm	1.2	13.0	136	3.080	54	394	2,000
2x10 rm	1.2	14.0	211	1.830	73	656	2,000
2x16 rm	1.2	16.0	334	1.150	97	1,051	1,000
4x6 rm	1.2	15.7	258	3.080	54	788	1,000
4x10 rm	1.2	17.0	422	1.830	73	1,312	1,000
4x16 rm	1.2	19.0	664	1.150	97	2,102	1,000
4x25 rm	1.4	24.0	1,008	0.727	133	3,284	1,000
NFA2X (ALL ALUMINIUM CONDUCTOR)							
2x10 rm	1.2	14.0	94	3.080	54	328	2,000
2x16 rm	1.2	16.0	138	1.910	72	525	1,000
4x10 rm	1.2	17.0	187	3.080	54	657	1,000
4x16 rm	1.2	19.0	272	1.910	72	1050	1,000
4x25 rm	1.4	24.0	423	1.200	102	1642	1,000
4x35 rm	1.6	27.0	564	0.868	125	2294	1,000

*Further information about derating factors for arrangement can be found on supplementary technical information.

Application

Bundle conductor for overhead distribution network without and with public lighting. (between pole to pole)

Specification

SPLN D3.010-1 ; 2014, SPLN 42-10 (Other specifications are available upon request)


Construction

- Conductor
NF2X : Stranded Copper Conductor
NFA2X : Stranded All Aluminium Conductor (AAC)
- Insulation
Extrude of XLPE.

Classification

Low Voltage Cable


COPPER MEDIUM VOLTAGE POWER CABLES

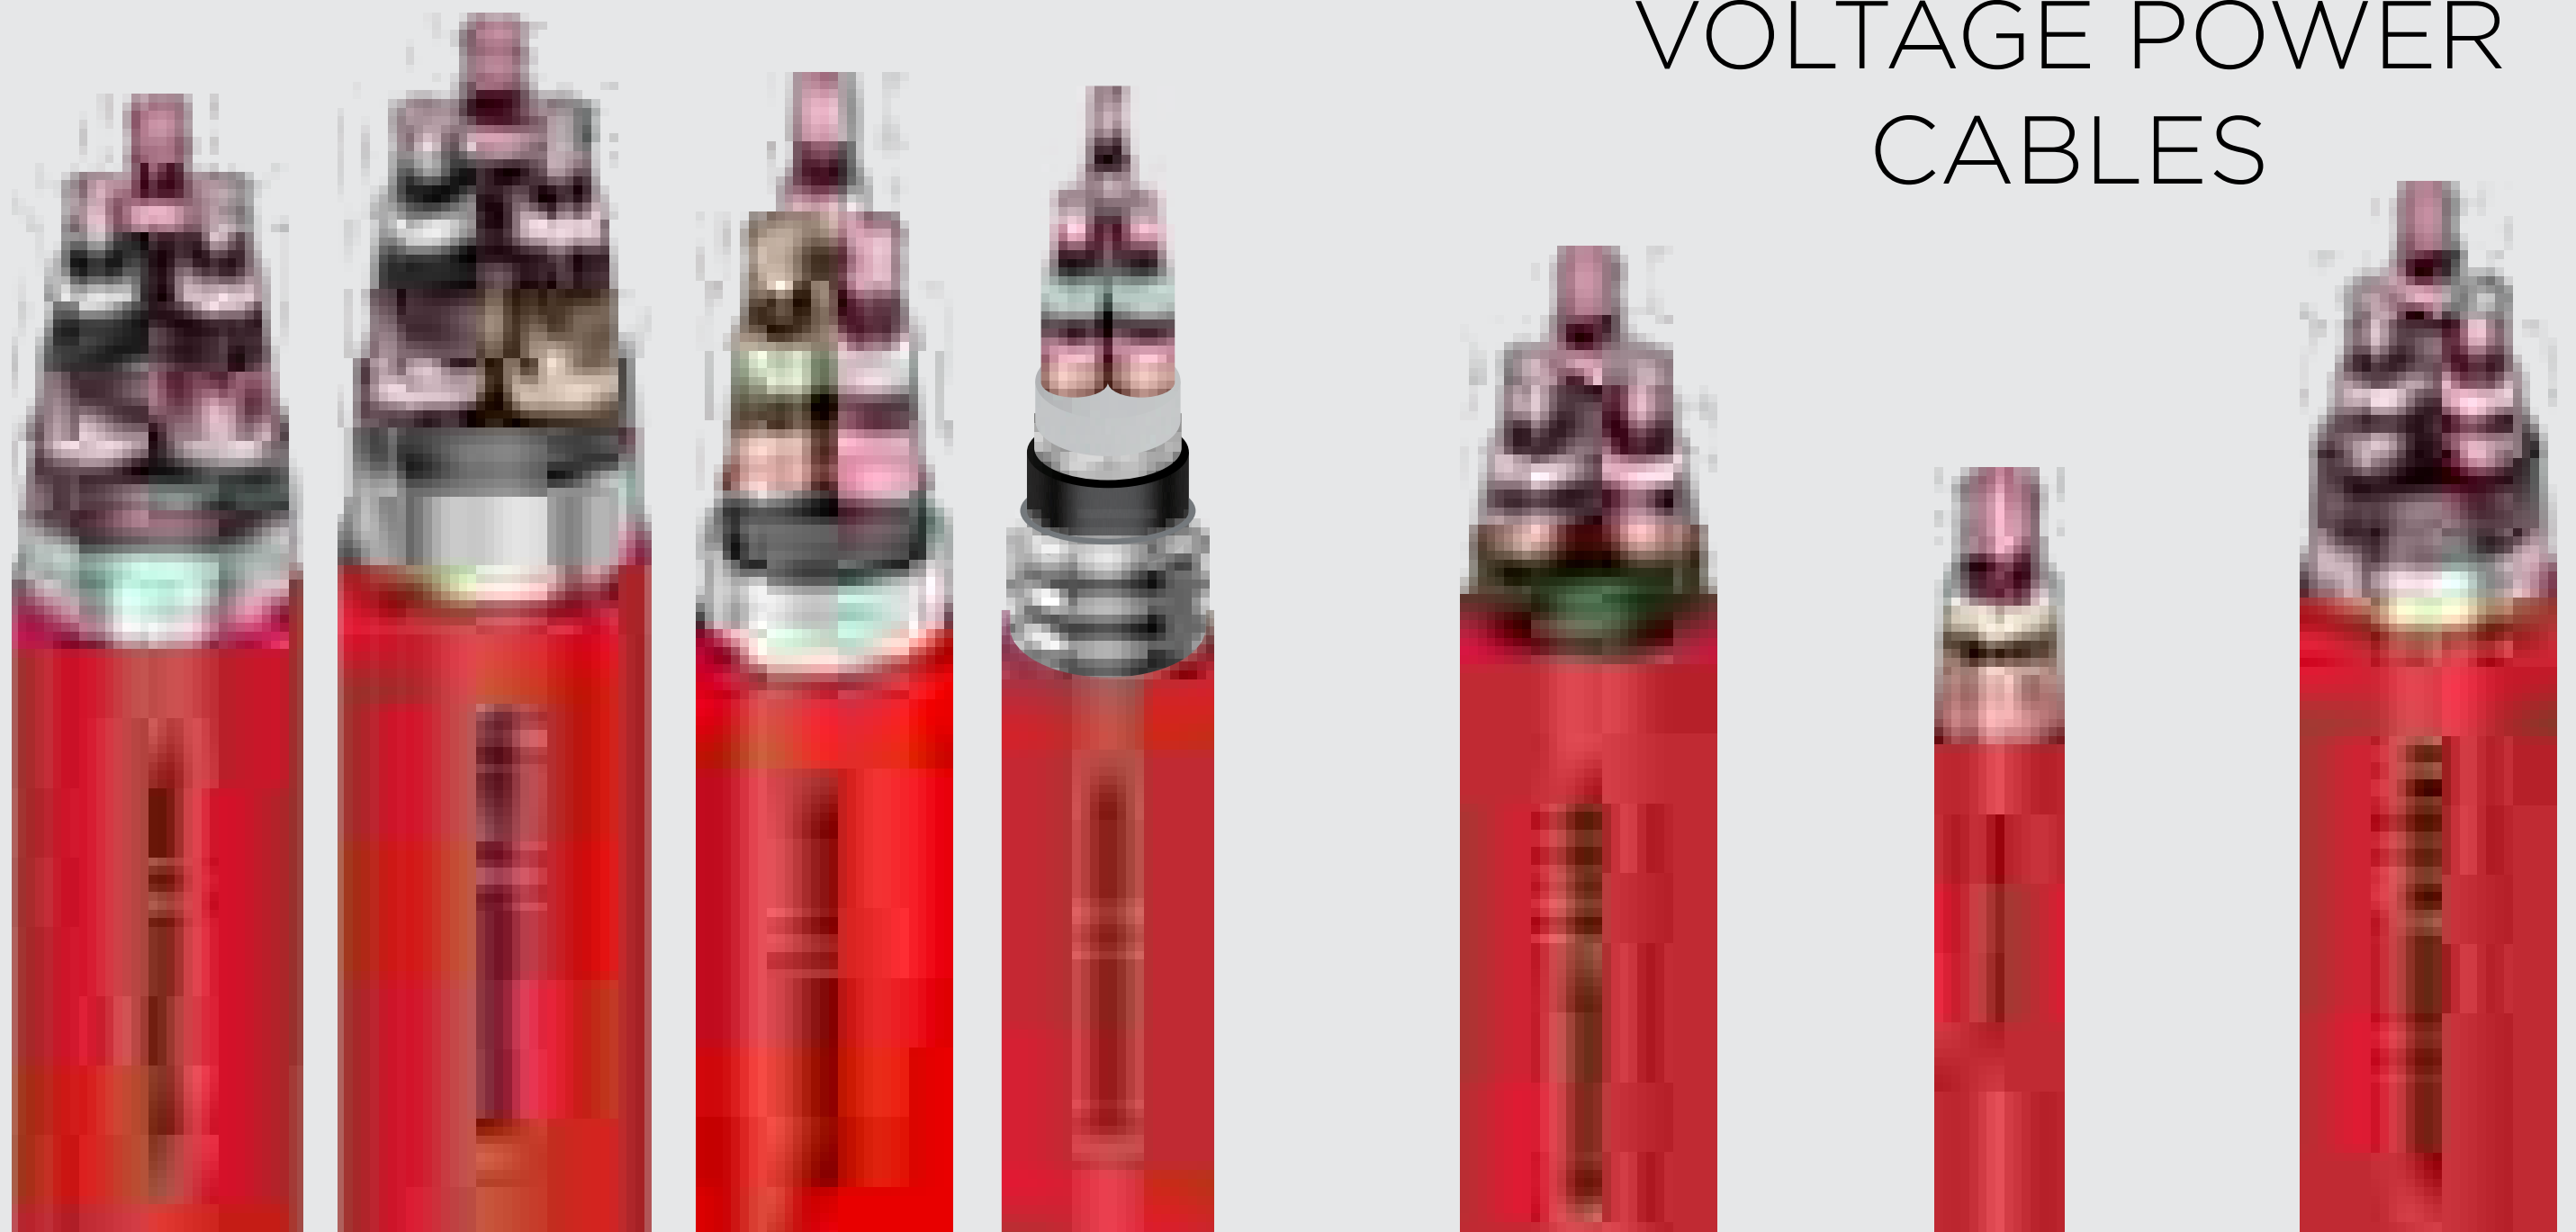

5 kV, Type MV MC-HL

(Copper Conductor, XLPE Insulated with 133% Insulation Level, Corrugated Aluminium Armour and PVC Sheath)
Standard Specification : IEC 60502-2, ICEA S-93639/NEMA WC74, UL 1072

**For ID Tape colour can be based on Customer Request or Follow Standard*

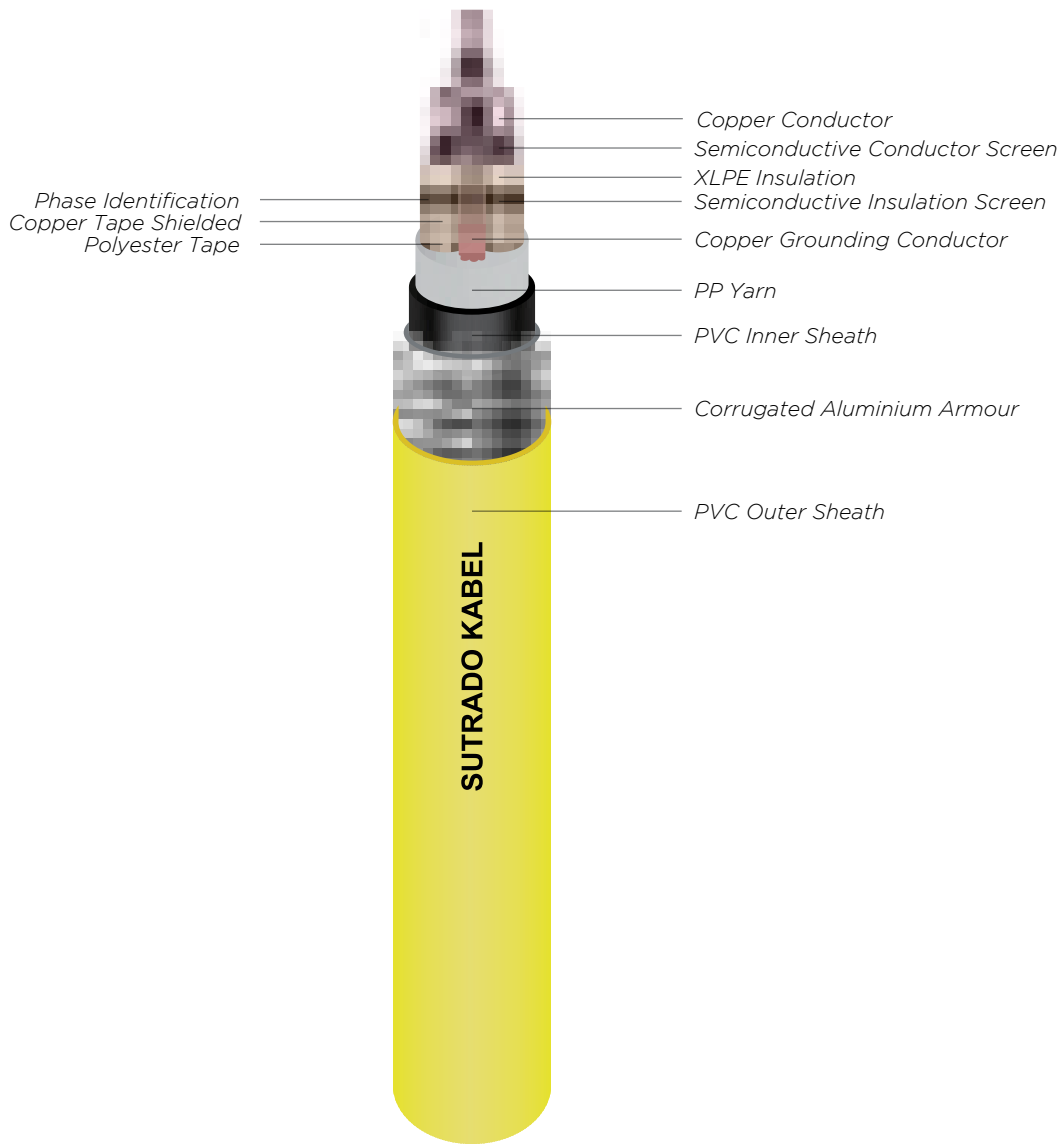

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES		
Size	Grounding Conductor		Approx. Overall Diameter	Approx. Cable Weight	Conductor	Max. Current - Carrying Capacity at 75 °C	
	No. of Core	Size			Max. DC Resistance at 20 °C	Cable Tray	Direct Burial
AWG	Pcs	AWG	mm	kg/km	ohm/km	A	A
2	3	10	45.90	3544	0.592	154	190
2	3	2	45.90	4322	0.592	154	190
1	3	8	47.60	4030	0.472	180	215
1/0	3	8	49.30	4484	0.373	205	245
2/0	3	8	52.50	5106	0.294	240	280
4/0	3	7	57.90	6774	0.185	320	360
4/0	3	2	57.90	7414	0.185	320	360
250	3	6	62.10	7744	0.157	355	395
350	3	6	67.50	9615	0.113	440	475
500	3	5	74.10	12357	0.079	545	570
750	3	4	85.10	17061	0.052	685	700

**Further information about derating factors for arrangement can be found on supplementary technical information.*

Application

Type MV MC-HL cables are recommended as an economical alternate to a wire in conduit system.

Designed specifically for use as feeders or branch circuits in industrial and utility power distribution systems. Cable maybe installed in both exposed and conceal work, wet and dry locations, sirectly buried in the earth or embedded in concrete.

Cables maybe installed on metal racks, troughs, in cable trays or secured to supports not greater than 6 feet a part.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen
- 133% or 173% Insulation Level
- Grounding Conductor

Hazardous Location


According to NEC 501, 502, 503 & 505

15 kV, MV-90 / MV-105 MC-HL

(Copper Conductor, EPR Insulated, Copper Wire Screen, Corrugated Aluminium Armour and PVC Sheath)

Standard Specification : IEC 60502-2, ICEA S-93639/NEMA WC74, UL 1072

**For ID Tape colour can be based on Customer Request or Follow Standard*

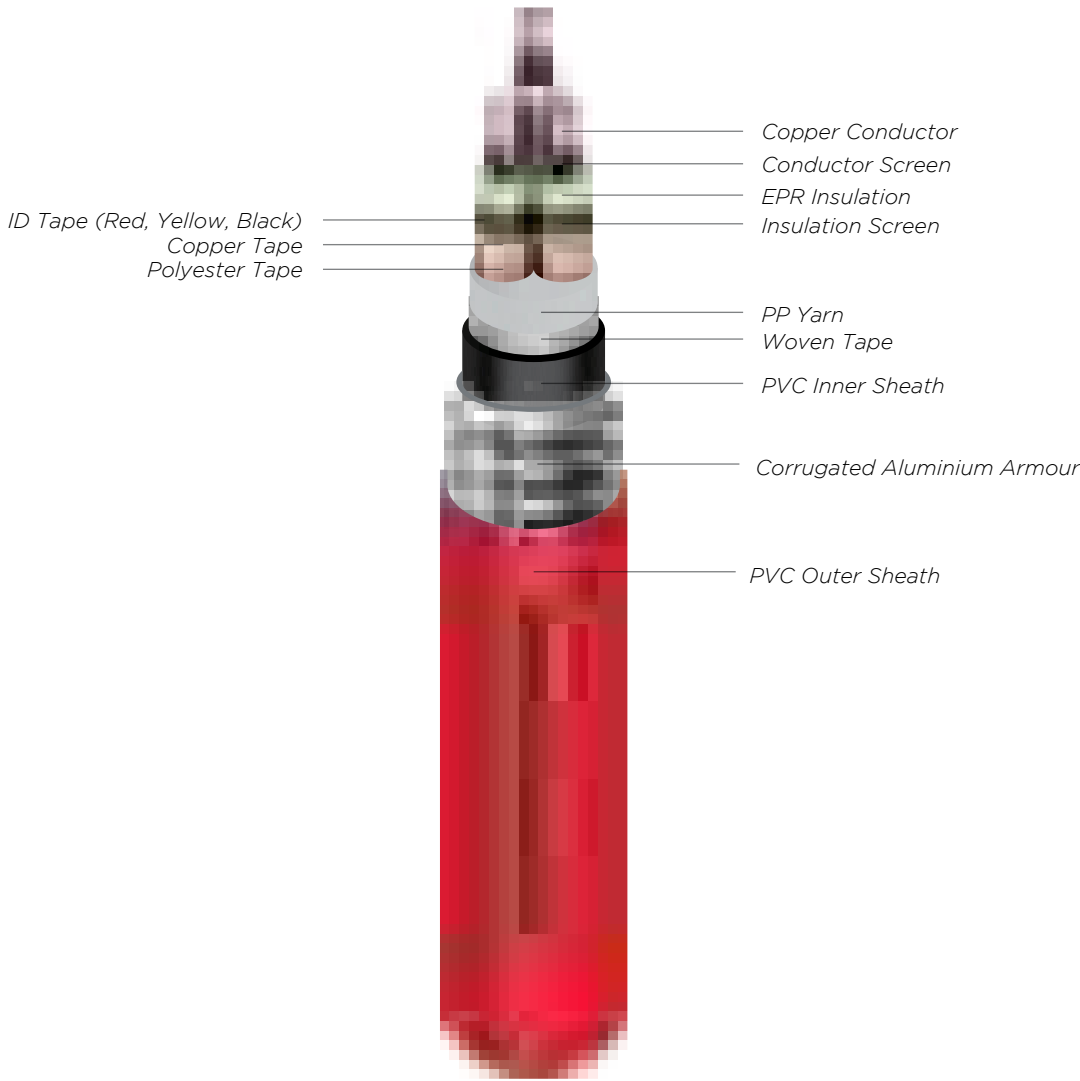

PHYSICAL PROPERTIES			ELECTRICAL PROPERTIES		
Size	Approx. Overall Diameter	Approx. Cable Weight	Conductor	Ampacities	
			Max. DC Resistance at 25 °C	in Cable Tray	In Direct Burial
AWG/Kcmil	mm	kg/km	ohm/km	A	A
2	48.40	5682	0.5315	154	190
1	49.40	6535	0.4243	180	215
1/0	51.40	7457	0.3346	205	245
2/0	54.40	8583	0.2657	240	280
4/0	62.20	11854	0.1673	320	360
250	66.30	13698	0.1414	355	395
350	72.00	17480	0.1010	440	475
500	79.10	23278	0.0709	545	570
750	93.00	33248	0.0472	685	700
1000	104.60	43189	0.0354	790	785

**Further information about derating factors for arrangement can be found on supplementary technical information.*

Application

Type MV MC-HL cables are recommended as an economical alternate to a wire in conduit system.

Designed specifically for use as feeders or branch circuits in industrial and utility power distribution systems. Cable maybe installed in both exposed and conceal work, wet and dry locations, sirectly buried in the earth or embedded in concrete.

Cables maybe installed on metal racks, troughs, in cable trays or secured to supports not greater than 6 feet a part.


Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Anti Rodent
- Low Smoke Zero Halogen
- 133% or 173% Insulation Level
- Grounding Conductor

Hazardous Location

According to NEC 501, 502, 503 & 505


ALUMINIUM MEDIUM VOLTAGE POWER CABLES

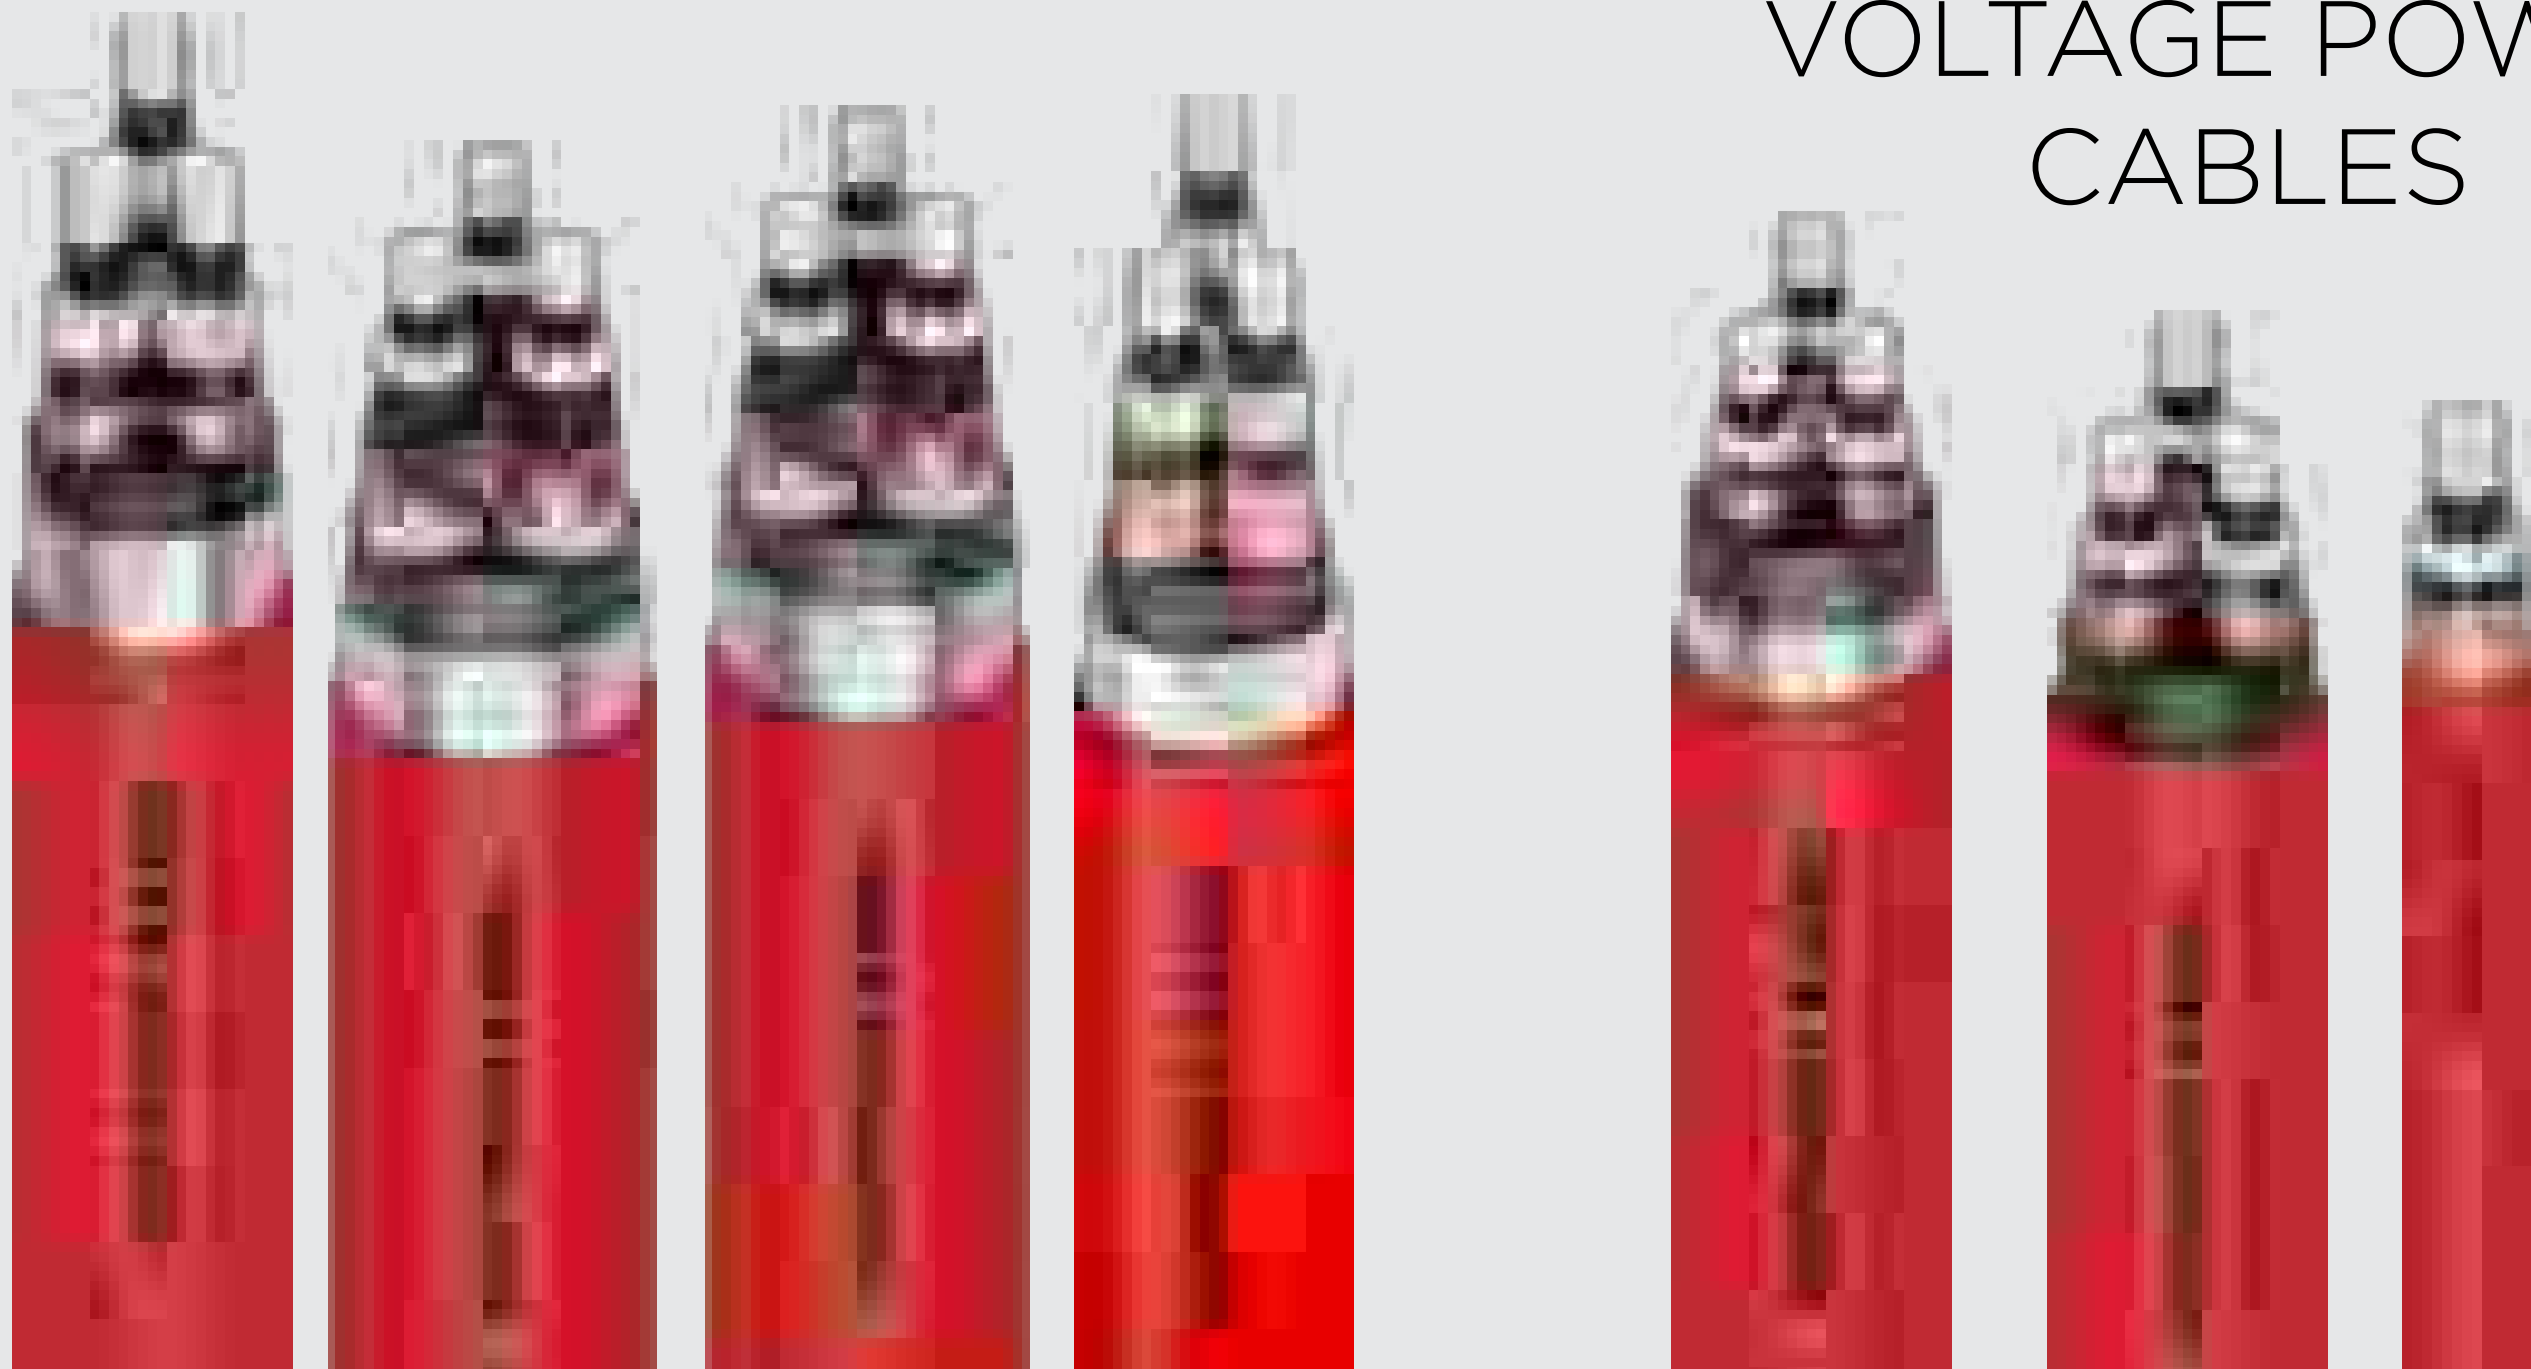

NA2XS**Y** (AI / XLPE / CTS / PVC)

(Aluminium Conductor, XLPE Insulated, Copper Tape Screen, PVC Sheathed)

Standard Specification : SNI IEC 60502-2, IEC 60502-2

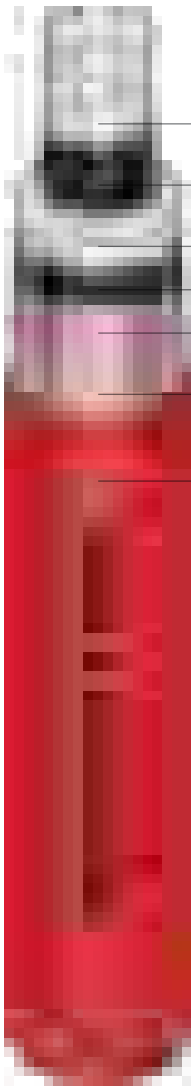

Aluminium Conductor

Conductor Screen

XLPE Insulation

Insulation Screen

Copper Tape Screen

Non-Hygroscopic Tape

Red PVC Outer Sheath

Application

For power station and switchgear as well as station because of small bending radius in confined spaces indoors. As underground because of light weight where installation conditions are difficult.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite
- Low Smoke Zero Halogen

Note : Conductor Shape

- 35 - 800 sqmm supplied in compacted circular stranded (cm) conductor shape

Standard Packing

- 35 - 300 sqmm supplied in wooden drum @ 1000 meters
- 400 - 800 sqmm supplied in wooden drum on available length
- Length Tolerance per drum ± 2%

Physical Properties					Electrical Properties								
Rating	Nom Cross Section Area		Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	X	C	Z	Max. Current - Carrying Capacity at 30 °C		Max. Short Circuit Current at 1 Second
					Max. DC Resistance at 20 °C	Max. AC Resistance at 90 °C					in Air	in Ground	
	mm²		mm	kg/mm	ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	A	kA
3.6/6 (7.2) kV	1	x 35	19.00	427	0.868	1.113	0.418	0.131	0.219	1.121	183	196	3.29
	1	x 50	19.90	481	0.641	0.822	0.403	0.126	0.240	0.832	215	229	4.70
	1	x 70	21.80	580	0.443	0.568	0.379	0.119	0.282	0.581	266	279	6.58
	1	x 95	23.40	689	0.320	0.411	0.362	0.114	0.320	0.426	318	330	8.93
	1	x 120	24.80	787	0.253	0.325	0.351	0.110	0.352	0.343	364	374	11.28
	1	x 150	26.20	893	0.206	0.265	0.343	0.108	0.382	0.286	410	417	14.10
	1	x 185	27.70	1,024	0.164	0.211	0.334	0.105	0.417	0.236	466	470	17.39
	1	x 240	30.50	1,233	0.125	0.162	0.325	0.102	0.459	0.191	545	541	22.56
	1	x 300	33.20	1,507	0.100	0.130	0.321	0.101	0.479	0.164	620	608	28.20
	1	x 400	37.80	1,912	0.078	0.102	0.319	0.100	0.480	0.143	717	692	37.60
6/10 (12) kV	1	x 500	41.70	2,348	0.061	0.081	0.325	0.102	0.473	0.130	831	787	47.00
	1	x 630	45.40	2,874	0.047	0.064	0.316	0.099	0.528	0.118	953	893	59.22
	1	x 800	50.30	3,479	0.037	0.052	0.307	0.096	0.599	0.109	1076	997	75.20
	1	x 35	20.80	491	0.868	1.113	0.448	0.141	0.182	1.122	187	198	3.29
	1	x 50	21.70	547	0.641	0.822	0.431	0.135	0.199	0.833	221	232	4.70
	1	x 70	23.60	652	0.443	0.568	0.404	0.127	0.232	0.582	271	281	6.58
	1	x 95	25.20	765	0.320	0.411	0.386	0.121	0.261	0.428	325	333	8.93
	1	x 120	26.60	867	0.253	0.325	0.373	0.117	0.286	0.345	371	377	11.28
	1	x 150	28.00	976	0.206	0.265	0.363	0.114	0.310	0.288	417	419	14.10
	1	x 185	29.70	1,125	0.164	0.211	0.353	0.111	0.337	0.238	473	472	17.39
8.7/15 (17.5) kV	1	x 240	32.30	1,332	0.125	0.161	0.340	0.107	0.379	0.194	552	543	22.56
	1	x 300	34.40	1,574	0.100	0.130	0.331	0.104	0.416	0.166	624	609	28.20
	1	x 400	38.80	1,981	0.078	0.102	0.326	0.102	0.441	0.144	720	693	37.60
	1	x 500	42.10	2,376	0.061	0.081	0.328	0.103	0.455	0.131	832	787	47.00
	1	x 630	46.00	2,925	0.047	0.064	0.319	0.100	0.508	0.119	953	893	59.22
	1	x 800	50.70	3,512	0.037	0.052	0.309	0.097	0.576	0.110	1078	998	75.20
	1	x 35	23.00	576	0.868	1.113	0.480	0.151	0.154	1.123	192	200	3.29
	1	x 50	23.90	636	0.641	0.822	0.461	0.145	0.168	0.835	226	234	4.70
	1	x 70	25.80	746	0.443	0.568	0.432	0.136	0.194	0.584	278	284	6.58
	1	x 95	27.40	864	0.320	0.411	0.411	0.129	0.217	0.430	333	336	8.93
12/20 (24) kV	1	x 120	29.00	984	0.253	0.325	0.397	0.125	0.237	0.348	379	379	11.28
	1	x 150	30.40	1,099	0.206	0.265	0.386	0.121	0.256	0.291	425	422	14.10
	1	x 185	32.10	1,255	0.164	0.211	0.375	0.118	0.277	0.242	482	475	17.39
	1	x 240	34.70	1,472	0.125	0.161	0.360	0.113	0.311	0.197	560	546	22.56
	1	x 300	36.80	1,722	0.100	0.130	0.350	0.110	0.340	0.170	634	613	28.20
	1	x 400	41.00	2,125	0.078	0.102	0.342	0.107	0.363	0.148	731	697	37.60
	1	x 500	44.50	2,552	0.061	0.081	0.342	0.107	0.380	0.134	843	792	47.00
	1	x 630	48.20	3,094	0.047	0.063	0.332	0.104	0.423	0.122	965	899	59.22
	1	x 800	53.10	3,721	0.037	0.051	0.321	0.101	0.477	0.113	1090	1004	75.20
	1	x 35	25.00	660	0.868	1.113	0.506	0.159	0.138	1.124	197	202	3.29
18/30 (36) kV	1	x 50	25.90	722	0.641	0.822	0.486	0.153	0.149	0.836	231	236	4.70
	1	x 70	27.80	838	0.443	0.568							

NA2XSEY (AI / XLPE / CTS / PVC)

(Aluminium Conductor, XLPE Insulated, Copper Tape Screen, PVC Sheathed)
Standard Specification : SNI IEC 60502-2, IEC 60502-2

**For ID Tape colour can be based on Customer Request or Follow Standard*



Application

Indoors, cable trunking, outdoors and in ground;
For power stations, industry and switchgear.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite

Note : Conductor Shape

- 35 - 400 sqmm supplied in compacted circular stranded (cm) conductor shape

Standard Packing


- 35 - 95 sqmm supplied in wooden drum @ 1000 meters
- 120 - 400 sqmm supplied in wooden drum on available length
- Length Tolerance per drum ± 2%

PHYSICAL PROPERTIES						ELECTRICAL PROPERTIES								
Rating	Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	X	C	Z	Max. Current - Carrying Capacity at 30 °C		Max. Short Circuit Current at 1 Second
						Max. DC Resistance at 20 °C	Max. AC Resistance at 90 °C					in air	in ground	
	mm²			mm	kg/km	ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	A	kA
3.6/6 (7.2) kV	3	x	35	40.30	1,927	0.868	1.113	0.344	0.108	0.209	1.118	147	136	3.29
	3	x	50	42.80	2,219	0.641	0.822	0.331	0.104	0.229	0.829	173	159	4.70
	3	x	70	47.00	2,690	0.443	0.568	0.311	0.098	0.269	0.577	215	194	6.58
	3	x	95	50.80	3,186	0.320	0.411	0.297	0.093	0.304	0.421	259	230	8.93
	3	x	120	54.40	3,698	0.253	0.325	0.288	0.090	0.334	0.337	296	260	11.28
	3	x	150	57.50	4,184	0.206	0.265	0.280	0.088	0.363	0.279	334	290	14.10
	3	x	185	61.00	4,776	0.164	0.211	0.273	0.086	0.395	0.228	381	328	17.39
	3	x	240	67.10	5,737	0.125	0.161	0.265	0.083	0.435	0.182	447	379	22.56
	3	x	300	73.30	6,984	0.100	0.130	0.261	0.082	0.456	0.153	510	427	28.20
6/10 (12) kV	3	x	400	83.30	8,903	0.078	0.102	0.259	0.081	0.460	0.130	592	488	37.60
	3	x	35	44.70	2,320	0.868	1.113	0.366	0.115	0.176	1.119	151	138	3.29
	3	x	50	46.90	2,586	0.641	0.822	0.352	0.111	0.192	0.829	179	161	4.70
	3	x	70	51.10	3,088	0.443	0.568	0.330	0.104	0.224	0.578	221	196	6.58
	3	x	95	55.40	3,696	0.320	0.411	0.315	0.099	0.252	0.422	265	232	8.93
	3	x	120	58.70	4,179	0.253	0.325	0.304	0.095	0.275	0.339	303	263	11.28
	3	x	150	61.80	4,691	0.206	0.265	0.296	0.093	0.298	0.281	341	293	14.10
	3	x	185	65.30	5,309	0.164	0.211	0.287	0.090	0.324	0.230	388	330	17.39
	3	x	240	71.10	6,301	0.125	0.161	0.277	0.087	0.364	0.183	453	382	22.56
8.7/15 (17.5) kV	3	x	300	76.10	7,390	0.100	0.130	0.269	0.084	0.399	0.155	515	429	28.20
	3	x	400	85.00	9,178	0.078	0.102	0.264	0.083	0.424	0.131	597	490	37.60
	3	x	35	49.90	2,808	0.868	1.113	0.390	0.123	0.151	1.120	156	139	3.29
	3	x	50	52.00	3,094	0.641	0.822	0.375	0.118	0.163	0.830	184	163	4.70
	3	x	70	56.60	3,695	0.443	0.568	0.351	0.110	0.189	0.579	227	198	6.58
	3	x	95	60.40	4,258	0.320	0.411	0.334	0.105	0.211	0.424	272	235	8.93
	3	x	120	63.60	4,771	0.253	0.325	0.323	0.101	0.230	0.340	311	266	11.28
	3	x	150	66.70	5,310	0.206	0.265	0.313	0.098	0.248	0.282	349	296	14.10
	3	x	185	70.60	6,035	0.164	0.211	0.304	0.095	0.269	0.232	396	333	17.39
12/20 (24) kV	3	x	240	76.30	7,041	0.125	0.161	0.292	0.092	0.301	0.185	462	385	22.56
	3	x	300	81.20	8,177	0.100	0.130	0.283	0.089	0.329	0.157	525	433	28.20
	3	x	400	90.20	10,050	0.078	0.102	0.277	0.087	0.352	0.134	606	494	37.60
	3	x	35	54.80	3,331	0.868	1.113	0.410	0.129	0.135	1.120	160	140	3.29
	3	x	50	57.00	3,637	0.641	0.822	0.394	0.124	0.146	0.831	188	164	4.70
	3	x	70	61.20	4,217	0.443	0.568	0.368	0.116	0.167	0.580	231	199	6.58
	3	x	95	65.10	4,841	0.320	0.411	0.350	0.110	0.187	0.425	276	236	8.93
	3	x	120	68.30	5,382	0.253	0.325	0.338	0.106	0.203	0.342	315	267	11.28
	3	x	150	71.90	6,024	0.206	0.265	0.328	0.103	0.218	0.284	353	297	14.10
18/30 (36) kV	3	x	185	75.30	6,708	0.164	0.211	0.318	0.100	0.235	0.233	401	335	17.39
	3	x	240	81.00	7,763	0.1								

NA2XSEbY (AI / XLPE / CTS / PVC / DSTA / PVC)

(Aluminium Conductor, XLPE Insulated, Copper Tape Screen, PVC Sheathed, Double Steel Tape Armor, PVC Sheathed)
Standard Specification : SNI IEC 60502-2, IEC 60502-2

*For ID Tape colour can be based on Customer Request or Follow Standard

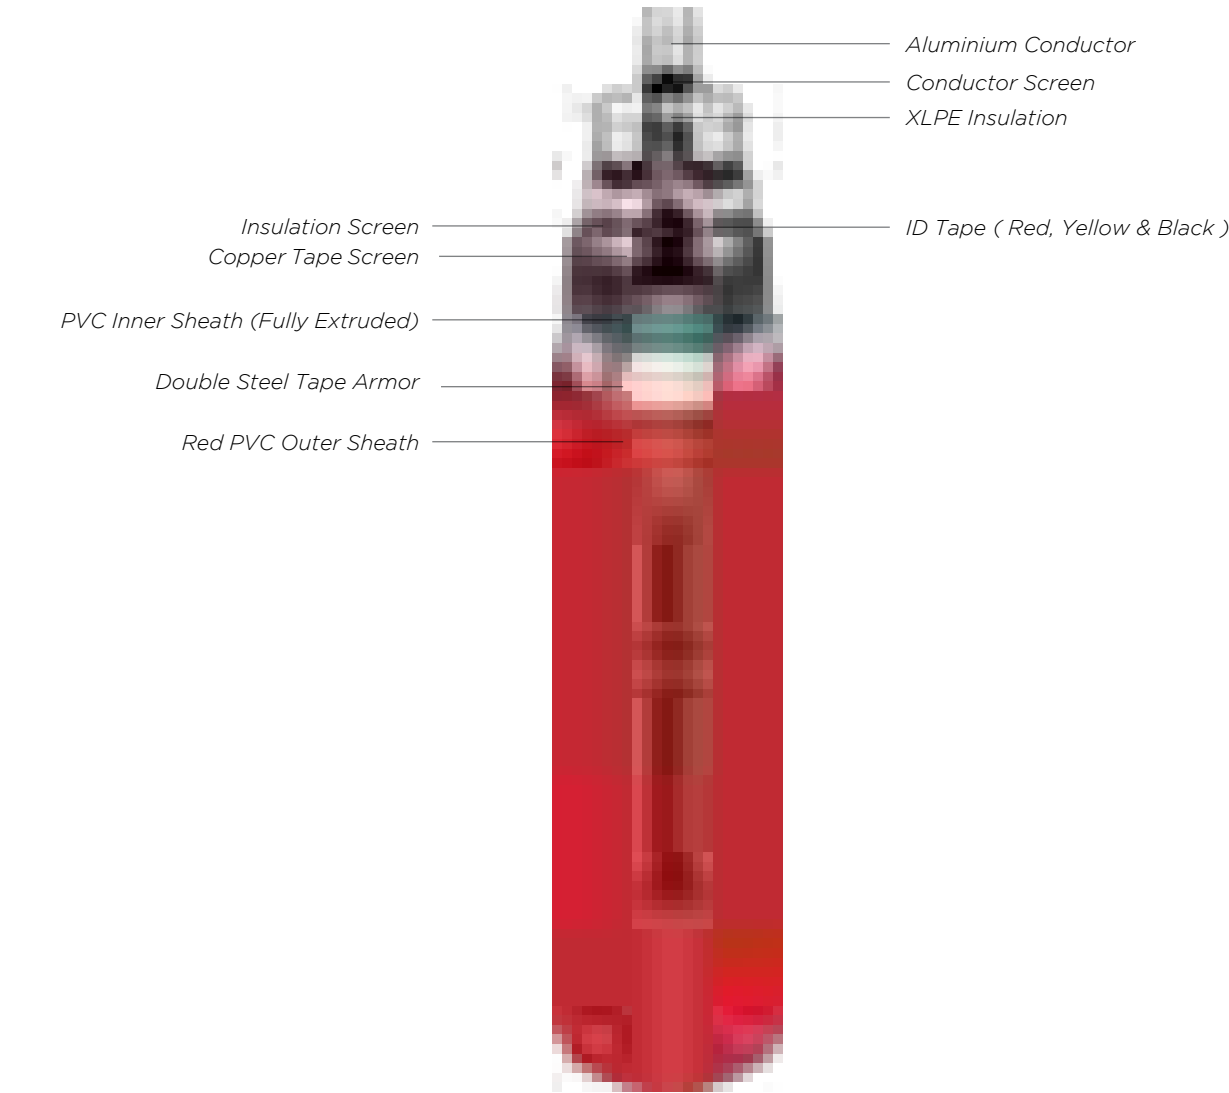

Application

For installation indoor, in ground direct burried, for power station and switchgear, if there is a risk that low mechanical damage may occur.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite

Note : Conductor Shape

- 35 - 400 sqmm supplied in compacted circular stranded (cm) conductor shape

Standard Packing

- 35 - 95 sqmm supplied in wooden drum @ 1000 meters
- 120 - 400 sqmm supplied in wooden drum on available length
- Length Tolerance per drum ± 2%


PHYSICAL PROPERTIES							ELECTRICAL PROPERTIES							
Rating	Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	X	C	Z	Max. Current - Carrying Capacity at 30 °C		Max. Short Circuit Current at 1 Second
						Max. DC Resistance at 20 °C	Max. AC Resistance at 90 °C					in air	in ground	
	mm²			mm	kg/km	ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	A	kA
3.6/6 (7.2) kV	3	x	35	42.30	2,597	0.868	1.113	0.338	0.106	0.214	1.118	148	136	3.29
	3	x	50	44.80	2,931	0.641	0.822	0.326	0.102	0.234	0.828	174	159	4.70
	3	x	70	49.20	3,497	0.443	0.568	0.306	0.096	0.275	0.576	216	194	6.58
	3	x	95	53.00	4,058	0.320	0.411	0.293	0.092	0.312	0.421	260	230	8.93
	3	x	120	56.60	4,634	0.253	0.325	0.284	0.089	0.343	0.337	297	260	11.28
	3	x	150	59.70	5,174	0.206	0.265	0.276	0.087	0.372	0.279	335	290	14.10
	3	x	185	63.20	5,826	0.164	0.211	0.269	0.085	0.406	0.227	381	328	17.39
	3	x	240	69.30	6,892	0.125	0.161	0.262	0.082	0.447	0.181	448	380	22.56
	3	x	300	75.50	8,247	0.100	0.130	0.258	0.081	0.467	0.153	510	427	28.20
6/10 (12) kV	3	x	400	87.20	11,251	0.078	0.102	0.257	0.081	0.470	0.130	595	489	37.60
	3	x	35	47.00	3,089	0.868	1.113	0.361	0.113	0.179	1.119	152	138	3.29
	3	x	50	49.10	3,391	0.641	0.822	0.348	0.109	0.195	0.829	179	161	4.70
	3	x	70	53.30	3,966	0.443	0.568	0.326	0.102	0.228	0.577	222	196	6.58
	3	x	95	57.50	4,621	0.320	0.411	0.311	0.098	0.256	0.422	266	232	8.93
	3	x	120	60.70	5,158	0.253	0.325	0.301	0.094	0.281	0.338	304	263	11.28
	3	x	150	63.80	5,723	0.206	0.265	0.292	0.092	0.304	0.280	342	293	14.10
	3	x	185	67.30	6,400	0.164	0.211	0.284	0.089	0.330	0.229	389	331	17.39
	3	x	240	73.30	7,527	0.125	0.161	0.274	0.086	0.372	0.183	454	382	22.56
8.7/15 (17.5) kV	3	x	300	78.30	8,700	0.100	0.130	0.266	0.084	0.408	0.154	516	429	28.20
	3	x	400	88.90	11,578	0.078	0.102	0.262	0.082	0.432	0.131	600	491	37.60
	3	x	35	52.10	3,665	0.868	1.113	0.386	0.121	0.153	1.120	157	139	3.29
	3	x	50	54.30	3,987	0.641	0.822	0.371	0.117	0.165	0.830	185	163	4.70
	3	x	70	58.90	4,669	0.443	0.568	0.347	0.109	0.191	0.579	227	198	6.58
	3	x	95	62.60	5,298	0.320	0.411	0.331	0.104	0.214	0.424	273	235	8.93
	3	x	120	65.80	5,866	0.253	0.325	0.319	0.100	0.234	0.340	311	266	11.28
	3	x	150	69.00	6,459	0.206	0.265	0.310	0.097	0.252	0.282	350	296	14.10
	3	x	185	72.80	7,252	0.164	0.211	0.301	0.094	0.273	0.231	396	333	17.39
12/20 (24) kV	3	x	240	78.50	8,355	0.125	0.161	0.289	0.091	0.306	0.185	463	385	22.56
	3	x	300	84.60	10,410	0.100	0.130	0.281	0.088	0.334	0.157	527	434	28.20
	3	x	400	94.10	12,594	0.078	0.102	0.274	0.086	0.357	0.133	609	495	37.60
	3	x	35	57.00	4,274	0.868	1.113	0.406	0.128	0.136	1.120	161	141	3.29
	3	x	50	59.20	4,616	0.641	0.822	0.391	0.123	0.147	0.831	189	165	4.70
	3	x	70	63.40	5,270	0.443	0.568	0.365	0.115	0.169	0.580	233	200	6.58
	3	x	95	67.10	5,929	0.320								

NA2XSERGbY (AI / XLPE / CTS / PVC / SWA / PVC)

(Aluminium Conductor, XLPE Insulated, Copper Tape Screen, PVC Sheathed, Steel Wire Armor, PVC Sheathed)

Standard Specification : SNI IEC 60502-2, IEC 60502-2

*For ID Tape colour can be based on Customer Request or Follow Standard

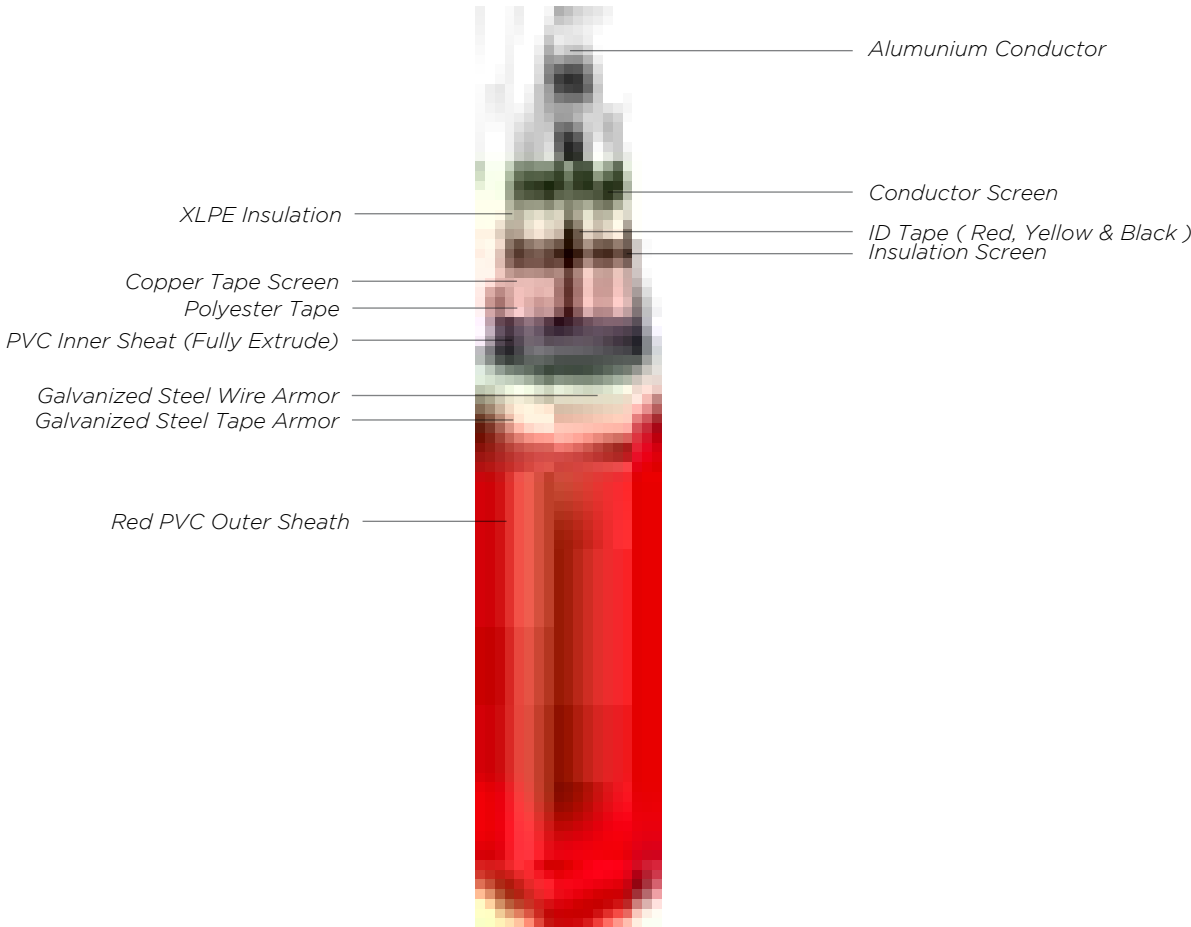

Application

For installation indoor, in ground direct burried, for power station and switchgear, if there is a risk that low mechanical damage may occur.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite

Note : Conductor Shape

- 35 - 400 sqmm supplied in compacted circular stranded (cm) conductor shape

Standard Packing


- 35 - 95 sqmm supplied in wooden drum @ 1000 meters
- 120 - 400 sqmm supplied in wooden drum on available length
- Length Tolerance per drum ± 2%

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES									
Rating	Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	X	C	Z	Max. Current - Carrying Capacity at 30 °C		Max. Short Circuit Current at 1 Second
						Max. DC Resistance at 20 °C	Max. AC Resistance at 90 °C					in air	in ground	
	mm²			mm	kg/km	ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	A	kA
3.6/6 (7.2) kV	3	x	35	45.10	3,389	0.868	1.113	0.338	0.106	0.214	1.118	152	137	3.29
	3	x	50	49.30	4,276	0.641	0.822	0.326	0.102	0.234	0.828	178	160	4.70
	3	x	70	53.50	4,934	0.443	0.568	0.306	0.096	0.275	0.576	220	194	6.58
	3	x	95	57.20	5,614	0.320	0.411	0.293	0.092	0.312	0.421	264	230	8.93
	3	x	120	60.80	6,309	0.253	0.325	0.284	0.089	0.343	0.337	300	259	11.28
	3	x	150	64.00	6,936	0.206	0.265	0.276	0.087	0.372	0.279	336	287	14.10
	3	x	185	67.60	7,703	0.164	0.211	0.269	0.085	0.406	0.227	380	322	17.39
	3	x	240	73.50	8,912	0.125	0.161	0.262	0.082	0.447	0.181	441	366	22.56
	3	x	300	81.20	11,308	0.100	0.130	0.258	0.081	0.467	0.153	494	405	28.20
6/10 (12) kV	3	x	400	92.10	14,188	0.078	0.102	0.257	0.081	0.470	0.130	562	452	37.60
	3	x	35	51.20	4,469	0.868	1.113	0.361	0.113	0.179	1.119	156	139	3.29
	3	x	50	53.30	4,829	0.641	0.822	0.348	0.109	0.195	0.829	183	162	4.70
	3	x	70	57.50	5,518	0.443	0.568	0.326	0.102	0.228	0.577	225	196	6.58
	3	x	95	61.90	6,355	0.320	0.411	0.311	0.098	0.256	0.422	268	231	8.93
	3	x	120	65.10	6,980	0.253	0.325	0.301	0.094	0.281	0.338	305	261	11.28
	3	x	150	68.20	7,632	0.206	0.265	0.292	0.092	0.304	0.280	342	289	14.10
	3	x	185	71.70	8,394	0.164	0.211	0.284	0.089	0.330	0.229	386	324	17.39
	3	x	240	79.10	10,483	0.125	0.161	0.274	0.086	0.372	0.183	445	367	22.56
8.7/15 (17.5) kV	3	x	300	84.00	11,860	0.100	0.130	0.266	0.084	0.408	0.154	498	406	28.20
	3	x	400	94.10	14,591	0.078	0.102	0.262	0.082	0.432	0.131	565	453	37.60
	3	x	35	56.40	5,191	0.868	1.113	0.386	0.121	0.153	1.120	160	140	3.29
	3	x	50	58.50	5,572	0.641	0.822	0.371	0.117	0.165	0.830	188	164	4.70
	3	x	70	63.10	6,402	0.443	0.568	0.347	0.109	0.191	0.579	230	198	6.58
	3	x	95	66.90	7,110	0.320	0.411	0.331	0.104	0.214	0.424	275	234	8.93
	3	x	120	70.10	7,803	0.253	0.325	0.319	0.100	0.234	0.340	312	263	11.28
	3	x	150	73.20	8,483	0.206	0.265	0.310	0.097	0.252	0.282	349	291	14.10
	3	x	185	78.60	10,213	0.164	0.211	0.301	0.094	0.273	0.231	392	324	17.39
12/20 (24) kV	3	x	240	84.20	11,513	0.125	0.161	0.289	0.091	0.306	0.185	452	369	22.56
	3	x	300	89.60	13,223	0.100	0.130	0.281	0.088	0.334	0.157	506	408	28.20
	3	x	400	99.20	15,776	0.078	0.102	0.274	0.086	0.357	0.133	572	454	37.60
	3	x	35	61.50	5,974	0.868	1.113	0.406	0.128	0.136	1.120	164	141	3.29
	3	x	50	63.60	6,376	0.641	0.822	0.391	0.123	0.147	0.831	192	165	4.70
	3	x	70	67.80	7,145	0.443								

NA2XSRY (AI / XLPE / CTS / PVC / AWA / PVC)

(Aluminium Conductor, XLPE Insulated, Copper Tape Screen, PVC Sheathed, Alumunium Wire Armor, PVC Sheathed)

Standard Specification : SNI IEC 60502-2, IEC 60502-2

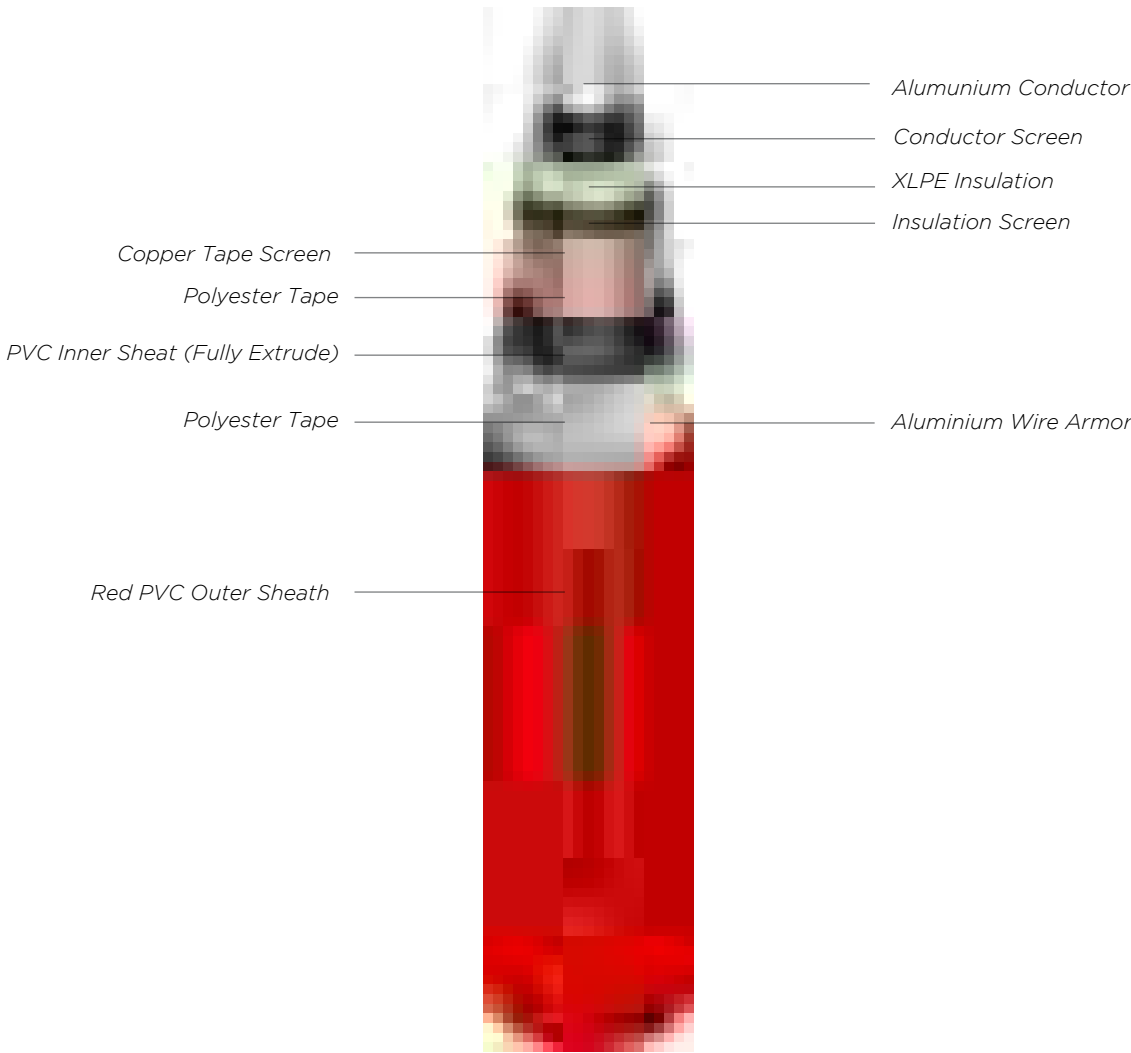

Application

For installation indoor, in ground direct burried, for power station and switchgear, if there is a risk that low mechanical damage may occur.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite

Note : Conductor Shape

- 35 - 630 sqmm supplied in compacted circular stranded (cm) conductor shape

Standard Packing

- 35 - 95 sqmm supplied in wooden drum @ 1000 meters
- 120 - 630 sqmm supplied in wooden drum on available length
- Length Tolerance per drum ± 2%


Physical Properties							Electrical Properties							
Rating	Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	X	C	Z	Max. Current - Carrying Capacity at 30 °C		Max. Short Circuit Current at 1 Second
						Max. DC Resistance at 20 °C	Max. AC Resistance at 90 °C					in air	in ground	
	mm²			mm	kg/km	ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	A	kA
3.6/6 (7.2) kV	1	x	35	24.70	770	0.868	1.113	0.440	0.138	0.219	1.122	196	201	3.29
	1	x	50	25.60	841	0.641	0.822	0.423	0.133	0.240	0.833	230	235	4.70
	1	x	70	27.70	981	0.443	0.568	0.397	0.125	0.282	0.582	282	284	6.58
	1	x	95	29.50	1,133	0.320	0.411	0.377	0.118	0.320	0.427	334	334	8.93
	1	x	120	30.90	1,252	0.253	0.325	0.365	0.115	0.352	0.344	379	375	11.28
	1	x	150	32.50	1,396	0.206	0.265	0.357	0.112	0.382	0.288	424	415	14.10
	1	x	185	35.20	1,677	0.164	0.211	0.348	0.109	0.417	0.238	476	462	17.39
	1	x	240	37.80	1,921	0.125	0.161	0.338	0.106	0.459	0.193	546	523	22.56
	1	x	300	40.70	2,274	0.100	0.300	0.332	0.104	0.479	0.166	609	576	28.20
	1	x	400	46.70	2,698	0.078	0.102	0.330	0.104	0.475	0.145	684	637	37.60
	1	x	500	50.60	3,285	0.061	0.081	0.326	0.103	0.497	0.130	761	696	47.00
6/10 (12) kV	1	x	630	54.50	3,916	0.047	0.064	0.317	0.100	0.555	0.118	842	758	59.22
	1	x	35	26.50	863	0.868	1.113	0.467	0.147	0.182	1.123	200	203	3.29
	1	x	50	27.60	948	0.641	0.822	0.449	0.141	0.199	0.834	235	237	4.70
	1	x	70	29.70	1,097	0.443	0.568	0.418	0.131	0.232	0.583	286	285	6.58
	1	x	95	31.30	1,239	0.320	0.411	0.399	0.125	0.261	0.429	339	335	8.93
	1	x	120	33.90	1,476	0.253	0.325	0.385	0.121	0.286	0.347	385	376	11.28
	1	x	150	35.50	1,632	0.206	0.265	0.377	0.118	0.310	0.290	429	415	14.10
	1	x	185	37.00	1,798	0.164	0.211	0.366	0.115	0.337	0.240	481	462	17.39
	1	x	240	39.80	2,075	0.125	0.161	0.352	0.111	0.379	0.196	551	524	22.56
	1	x	300	42.10	2,383	0.100	0.300	0.341	0.107	0.416	0.168	611	576	28.20
	1	x	400	47.70	2,817	0.078	0.102	0.336	0.106	0.436	0.147	687	636	37.60
8.7/15 (17.5) kV	1	x	500	51.00	3,316	0.061	0.081	0.329	0.103	0.477	0.131	763	696	47.00
	1	x	630	54.90	3,950	0.047	0.064	0.319	0.100	0.533	0.119	843	758	59.22
	1	x	35	29.10	1,012	0.868	1.113	0.495	0.155	0.154	1.124	204	204	3.29
	1	x	50	30.00	1,089	0.641	0.822	0.476	0.149	0.168	0.835	239	238	4.70
	1	x	70	31.90	1,230	0.443	0.568	0.444	0.140	0.194	0.585	290	286	6.58
	1	x	95	34.70	1,489	0.320	0.411	0.423	0.133	0.217	0.432	346	336	8.93
	1	x	120	36.30	1,643	0.253	0.325	0.408	0.128	0.237	0.349	390	377	11.28

NA2XSEFGbY (AI / XLPE / CTS / PVC / SFA / PVC)

(Aluminium Conductor, XLPE Insulated, Copper Tape Screen, PVC Inner Sheathed, Galvanized Steel Flat Armor, PVC Sheathed)

Standard Specification : SNI IEC 60502-2, IEC 60502-2

*For ID Tape colour can be based on Customer Request or Follow Standard

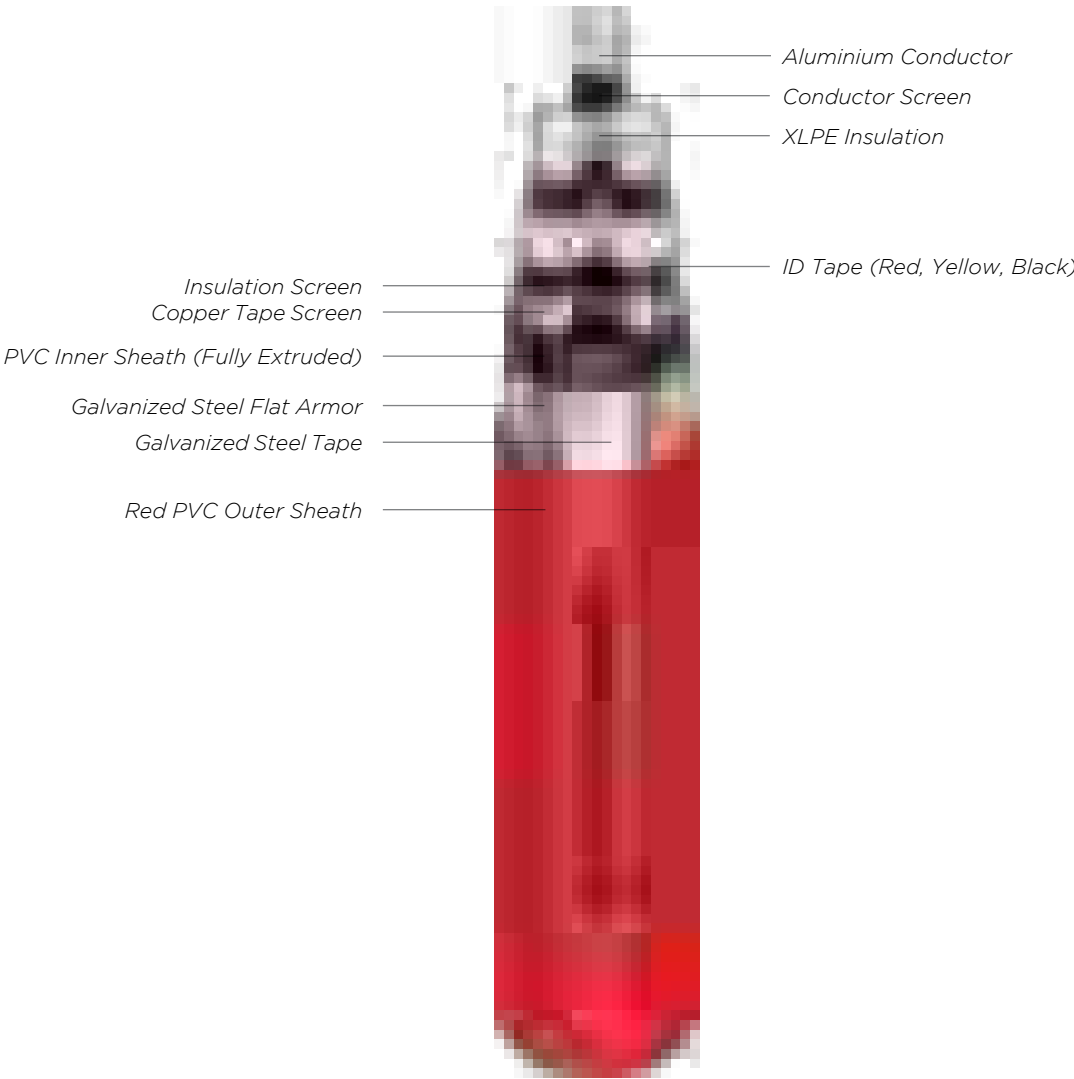

Application

For installation in the ground, indoors, cable trunking and outdoors if increased mechanical protection is required or where high-pulling stresses may occur during installation or operation.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite

Note : Conductor Shape

- 35 - 400 sqmm supplied in compacted circular stranded (cm) conductor shape

Standard Packing


- 35 - 70 sqmm supplied in wooden drum @ 1000 meters
- 95 - 400 sqmm supplied in wooden drum on available length
- Length Tolerance per drum ± 2%

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES									
Rating	Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	X	C	Z	Max. Current - Carrying Capacity at 30 °C		Max. Short Circuit Current at 1 Second
						Max. DC Resistance at 20 °C	Max. AC Resistance at 90 °C					in air	in ground	
	mm²			mm	kg/km	ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	A	kA
3.6/6 (7.2) kV	3	x	35	42.70	2,720	0.868	1.113	0.334	0.105	0.219	1.118	147	136	3.29
	3	x	50	45.60	3,158	0.641	0.822	0.322	0.101	0.240	0.828	174	159	4.70
	3	x	70	49.80	3,733	0.443	0.568	0.303	0.095	0.282	0.576	215	193	6.58
	3	x	95	53.60	4,305	0.320	0.411	0.290	0.091	0.320	0.421	260	230	8.93
	3	x	120	57.20	4,893	0.253	0.325	0.281	0.088	0.352	0.337	296	260	11.28
	3	x	150	60.30	5,451	0.206	0.265	0.274	0.086	0.382	0.278	334	290	14.10
	3	x	185	63.80	6,117	0.164	0.211	0.267	0.084	0.417	0.227	380	327	17.39
	3	x	240	69.90	7,195	0.125	0.161	0.260	0.081	0.459	0.181	447	378	22.56
	3	x	300	76.10	8,586	0.100	0.130	0.256	0.080	0.479	0.153	508	425	28.20
	3	x	400	87.20	11,134	0.078	0.102	0.255	0.080	0.480	0.130	590	486	37.60
6/10 (12) kV	3	x	35	47.60	3,323	0.868	1.113	0.358	0.112	0.182	1.119	152	137	3.29
	3	x	50	49.70	3,628	0.641	0.822	0.344	0.108	0.199	0.829	179	161	4.70
	3	x	70	53.90	4,210	0.443	0.568	0.323	0.101	0.232	0.577	221	196	6.58
	3	x	95	58.10	4,896	0.320	0.411	0.308	0.097	0.261	0.422	265	232	8.93
	3	x	120	61.30	5,425	0.253	0.325	0.298	0.094	0.286	0.338	303	263	11.28
	3	x	150	64.60	6,038	0.206	0.265	0.290	0.091	0.310	0.280	341	292	14.10
	3	x	185	68.10	6,730	0.164	0.211	0.282	0.088	0.337	0.229	388	330	17.39
	3	x	240	73.90	7,863	0.125	0.161	0.272	0.085	0.379	0.183	453	380	22.56
	3	x	300	78.90	9,036	0.100	0.130	0.264	0.083	0.416	0.154	514	427	28.20
	3	x	400	88.90	11,456	0.078	0.102	0.260	0.082	0.441	0.131	594	487	37.60
8.7/15 (17.5) kV	3	x	35	52.70	3,897	0.868	1.113	0.383	0.120	0.154	1.119	157	139	3.29
	3	x	50	54.90	4,248	0.641	0.822	0.368	0.116	0.168	0.830	185	163	4.70
	3	x	70	59.50	4,931	0.443	0.568	0.344	0.108	0.194	0.578	227	198	6.58
	3	x	95	63.20	5,570	0.320	0.411	0.328	0.103	0.217	0.423	272	234	8.93
	3	x	120	66.50	6,156	0.253	0.325	0.317	0.099	0.237	0.340	311	265	11.28
	3	x	150	69.60	6,767	0.206	0.265	0.308	0.097	0.256	0.282	349	296	14.10
	3	x	185	73.50	7,568	0.164	0.211	0.299	0.094	0.277	0.231	395	332	17.39
	3	x												

NA2XSEYBY (AI / XLPE / CWS / PVC / DSTA / PVC)

(Aluminium Conductor, XLPE Insulated, Copper Wire Screen, PVC Inner Sheathed, Double Steel Tape Armor, PVC Sheathed)
Standard Specification : SPLN 43-5, SNI IEC 60502-2, IEC 60502-2

*For ID Tape colour can be based on Customer Request or Follow Standard

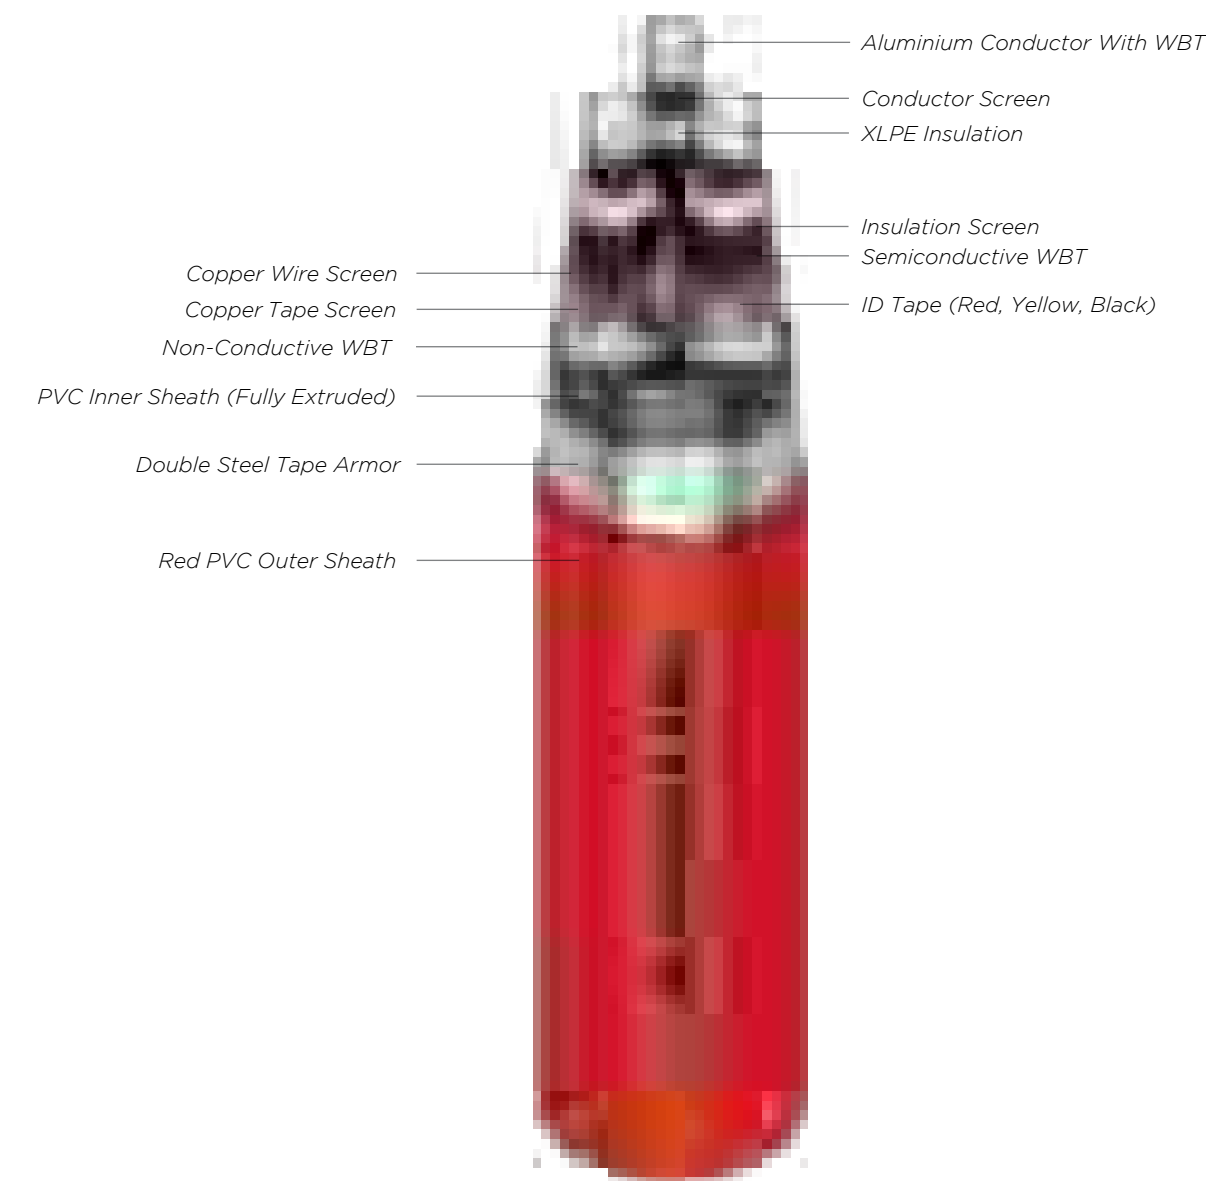

Application

For installation in the ground, indoors, cable trunking and outdoors if increased mechanical protection is required or where high-pulling stresses may occur during installation or operation.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite

Note : Conductor Shape

- 35 - 400 sqmm supplied in compacted circular stranded (cm) conductor shape

Standard Packing

- 35 - 70 sqmm supplied in wooden drum @ 1000 meters
- 95 - 400 sqmm supplied in wooden drum on available length
- Length Tolerance per drum ± 2%


PHYSICAL PROPERTIES						ELECTRICAL PROPERTIES								
Rating	Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	X	C	Z	Max. Current - Carrying Capacity at 30 °C		Max. Short Circuit Current at 1 Second
						Max. DC Resistance at 20 °C	Max. AC Resistance at 90 °C					in air	in ground	
	mm²			mm	kg/km	ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	A	kA
3.6/6 (7.2) kV	3	x	35	52.69	3,797	0.868	1.113	0.388	0.122	0.211	1.120	156	139	3.29
	3	x	50	55.48	4,176	0.641	0.822	0.368	0.116	0.237	0.830	184	162	4.70
	3	x	70	59.34	4,742	0.443	0.568	0.348	0.109	0.272	0.579	226	197	6.58
	3	x	95	63.63	5,403	0.320	0.411	0.331	0.104	0.310	0.424	271	234	8.93
	3	x	120	66.85	5,958	0.253	0.325	0.319	0.100	0.340	0.340	309	265	11.28
	3	x	150	70.04	6,787	0.206	0.265	0.311	0.098	0.366	0.282	346	294	14.10
	3	x	185	74.33	7,621	0.164	0.211	0.301	0.094	0.404	0.231	394	332	17.39
	3	x	240	81.33	9,597	0.125	0.161	0.293	0.092	0.432	0.186	462	384	22.56
	3	x	300	88.71	11,477	0.100	0.130	0.286	0.090	0.465	0.158	528	433	28.20
6/10 (12) kV	3	x	400	96.42	13,390	0.078	0.102	0.279	0.088	0.496	0.134	608	494	37.60
	3	x	35	56.78	4,256	0.868	1.113	0.406	0.127	0.178	1.120	160	140	3.29
	3	x	50	59.77	4,682	0.641	0.822	0.385	0.121	0.199	0.831	188	164	4.70
	3	x	70	63.63	5,278	0.443	0.568	0.364	0.114	0.226	0.580	230	199	6.58
	3	x	95	68.12	6,006	0.320	0.411	0.345	0.108	0.257	0.425	276	235	8.93
	3	x	120	71.34	6,598	0.253	0.325	0.333	0.105	0.280	0.341	314	266	11.28
	3	x	150	74.33	7,419	0.206	0.265	0.324	0.102	0.301	0.284	352	296	14.10
	3	x	185	78.62	8,277	0.164	0.211	0.313	0.098	0.331	0.233	400	334	17.39
	3	x	240	85.38	10,309	0.125	0.161	0.303	0.095	0.362	0.187	467	386	22.56
8.7/15 (17.5) kV	3	x	300	91.70	12,039	0.100	0.129	0.293	0.092	0.408	0.159	532	435	28.20
	3	x	400	98.35	13,780	0.078	0.102	0.283	0.089	0.454	0.135	611	495	37.60
	3	x	35	62.33	4,940	0.868	1.113	0.425	0.134	0.152	1.121	163	141	3.29
	3	x	50	65.12	5,362	0.641	0.822	0.404	0.127	0.169	0.832	193	166	4.70
	3	x	70	68.98	5,997	0.443	0.568	0.382	0.120	0.191	0.581	235	201	6.58
	3	x	95	73.27	6,746	0.320	0.411	0.362	0.114	0.215	0.426	282	238	8.93
	3	x	120	76.49	7,358	0.253	0.325	0.349	0.110	0.234	0.343	321	269	11.28
	3	x	150	79.68	8,245	0.206	0.265	0.339	0.107	0.250	0.285	358	299	14.10
	3	x	185	83.97	9,147	0.164	0.211	0.327	0.103	0.275	0.23			

NA2XSEYFGbY (AI / XLPE / CWS / PVC / SFA / PVC)

(Aluminium Conductor, XLPE Insulated, Copper Wire Screen, PVC Inner Sheathed, Steel Flat Armor, PVC Sheathed)

Standard Specification : SPLN 43-5, SNI IEC 60502-2, IEC 60502-2

*For ID Tape colour can be based on Customer Request or Follow Standard

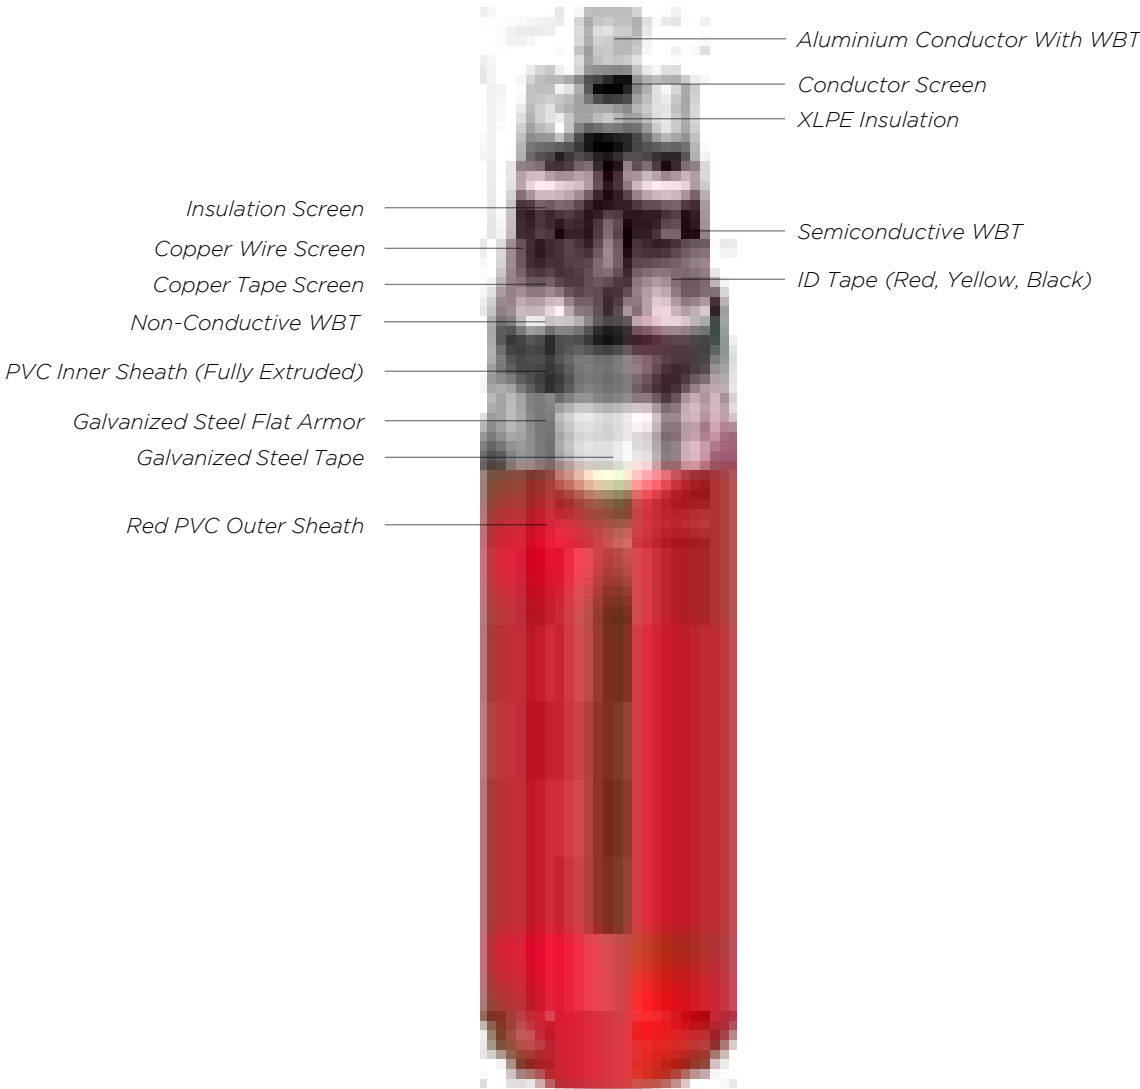

Application

For installation in the ground, indoors, cable trunking and outdoors if increased mechanical protection is required or where high-pulling stresses may occur during installation or operation.

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite

Note : Conductor Shape




- 35 - 400 sqmm supplied in compacted circular stranded (cm) conductor shape

Standard Packing

- 35 - 70 sqmm supplied in wooden drum @ 1000 meters
- 95 - 400 sqmm supplied in wooden drum on available length
- Length Tolerance per drum ± 2%

PHYSICAL PROPERTIES							ELECTRICAL PROPERTIES							
Rating	Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		L	X	C	Z	Max. Current - Carrying Capacity at 30 °C		Max. Short Circuit Current at 1 Second
						Max. DC Resistance at 20 °C	Max. AC Resistance at 90 °C					in air	in ground	
	mm²			mm	kg/km	ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	A	kA
3.6/6 (7.2) kV	3	x	35	53.30	3,423	0.868	1.113	0.388	0.122	0.211	1.120	156	139	3.29
	3	x	50	56.09	3,778	0.641	0.822	0.368	0.116	0.237	0.830	185	163	4.70
	3	x	70	59.95	4,316	0.443	0.568	0.348	0.109	0.272	0.579	226	197	6.58
	3	x	95	64.24	4,940	0.320	0.411	0.331	0.104	0.310	0.424	272	234	8.93
	3	x	120	67.46	5,470	0.253	0.325	0.319	0.100	0.340	0.340	310	265	11.28
	3	x	150	70.65	6,276	0.206	0.265	0.311	0.098	0.366	0.282	346	294	14.10
	3	x	185	74.94	7,077	0.164	0.211	0.301	0.094	0.404	0.231	394	332	17.39
	3	x	240	80.73	8,205	0.125	0.161	0.293	0.092	0.432	0.186	459	382	22.56
	3	x	300	88.11	9,953	0.100	0.130	0.286	0.090	0.465	0.158	525	431	28.20
	3	x	400	95.82	11,729	0.078	0.102	0.279	0.088	0.496	0.134	604	490	37.60
6/10 (12) kV	3	x	35	57.39	3,847	0.868	1.113	0.406	0.127	0.178	1.120	160	140	3.29
	3	x	50	60.38	4,250	0.641	0.822	0.385	0.121	0.199	0.831	189	164	4.70
	3	x	70	64.24	4,815	0.443	0.568	0.364	0.114	0.226	0.580	231	199	6.58
	3	x	95	68.73	5,510	0.320	0.411	0.345	0.108	0.257	0.425	276	235	8.93
	3	x	120	71.95	6,077	0.253	0.325	0.333	0.105	0.280	0.341	315	266	11.28
	3	x	150	74.94	6,875	0.206	0.265	0.324	0.102	0.301	0.284	352	296	14.10
	3	x	185	79.23	7,696	0.164	0.211	0.313	0.098	0.331	0.233	400	334	17.39
	3	x	240	84.78	8,849	0.125	0.161	0.303	0.095	0.362	0.187	464	384	22.56
	3	x	300	91.10	10,463	0.100	0.129	0.293	0.092	0.408	0.159	529	432	28.20
	3	x	400	97.75	12,084	0.078	0.102	0.283	0.089	0.454	0.135	606	492	37.60
8.7/15 (17.5) kV	3	x	35	62.94	4,491	0.868	1.113	0.425	0.134	0.152	1.121	164	142	3.29
	3	x	50	65.73	4,888	0.641	0.822	0.404	0.127	0.169	0.832	193	166	4.70
	3	x	70	69.59	5,495	0.443	0.568	0.382	0.120	0.191	0.581	236	201	6.58
	3	x	95	73.88	6,207	0.320	0.411	0.362	0.114	0.215	0.426	282	238	8.93
	3	x	120	77.10	6,794	0.253	0.325	0.349	0.110	0.234	0.343	321	269	11.28
	3	x	150	80.29	7,659	0.206	0.265	0.339	0.107	0.250	0.285	358	299	14.10
	3	x	185	84.58	8,5									

MEDIUM VOLTAGE TWISTED CABLES

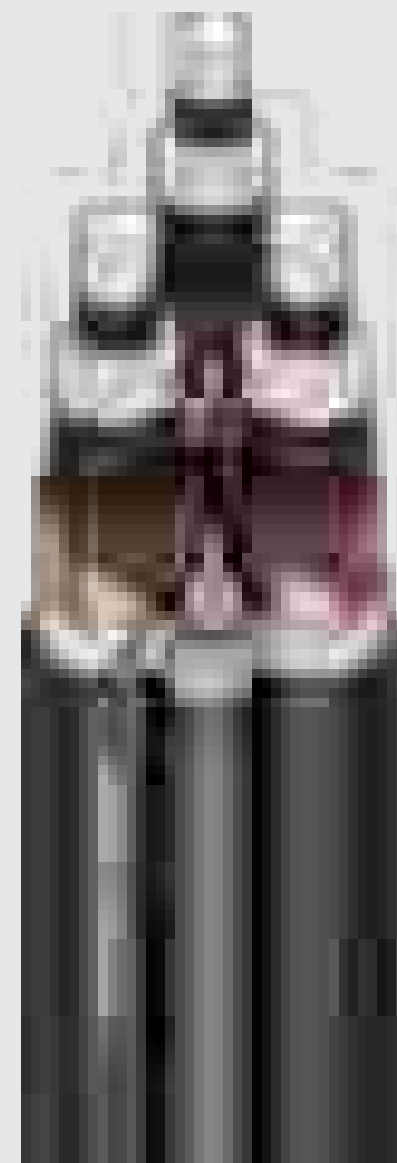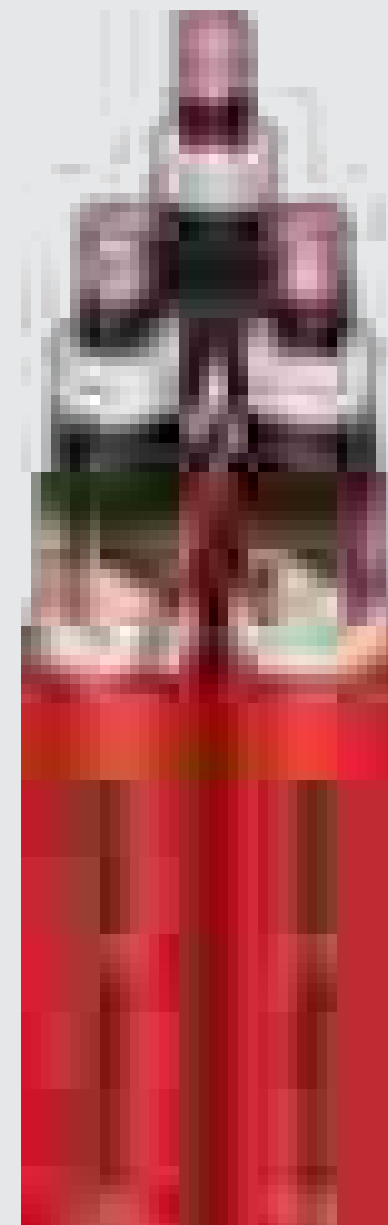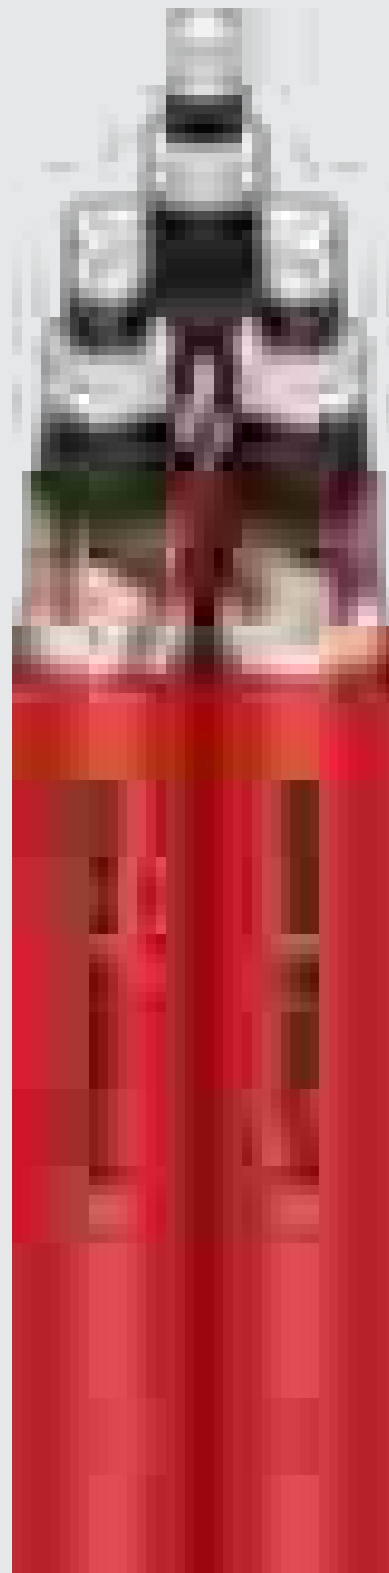

12/20 (24) kV, NF2XSY (Cu/XLPE/CWS/PVC)


(Copper Conductor, XLPE Insulated, Copper Wire Screen,PVC Sheated)

12/20 (24) kV, NFA2XSY (Al/XLPE/CWS/PVC)

(Aluminium Conductor, XLPE Insulated, Copper Wire Screen, PVC Sheated)


Standard Specification : SPLN 43-5, SNI IEC 60502-2, IEC 60502-2

*For ID Tape colour can be based on Customer Request or Follow Standard

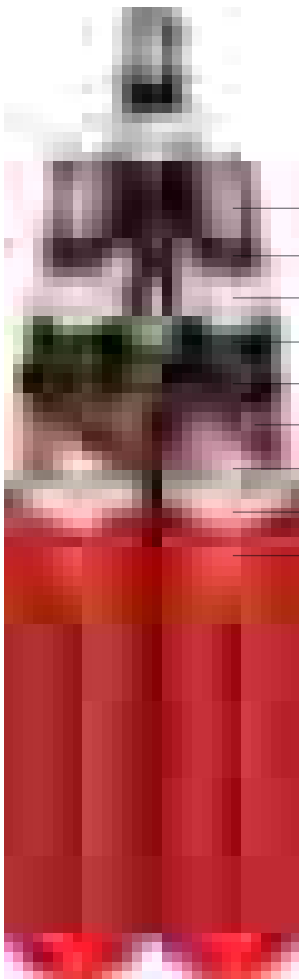

NF2XSY

- Copper Conductor
- Conductor Screen
- XLPE Insulated
- Insulation Screen
- Water Blocking Tape
- Copper Wire Screen
- Copper Tape Screen
- Non-Conductive WBT
- Red PVC Outer Sheath

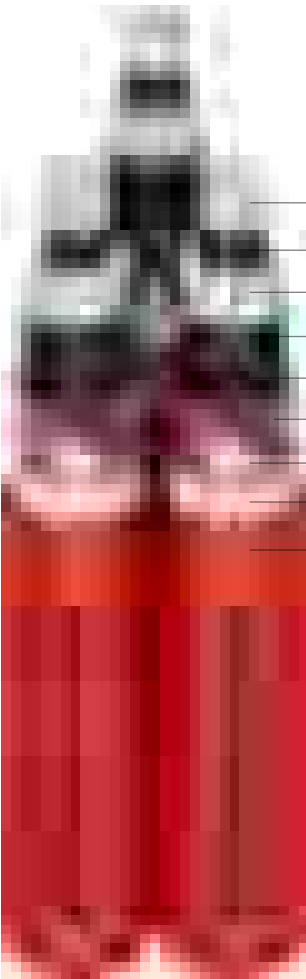

NFA2XSY

- Aluminium Conductor
- Conductor Screen
- XLPE Insulated
- Insulation Screen
- Water Blocking Tape
- Copper Wire Screen
- Copper Tape Screen
- Non-Conductive WBT
- Red PVC Outer Sheath

Application

XLPE insulated twisted cables are applied for underground installation

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite

Note : Conductor Shape

- 35 - 300 sqmm supplied in compacted circular stranded (cm) conductor shape

Standard Packing

- 35 - 95 sqmm supplied in wooden drum @ 1000 meters
- 120 - 300 sqmm supplied in wooden drum on available length
- Length Tolerance per drum ± 2%

NF2XSY										
PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES					
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		Inductance	Max. (Amp) Current - Carrying Capacity At 30 °C	Max. Short Circuit Current at 1 Second	
					Max. DC Resistance at 20 °C	Max. AC Resistance at 90 °C			in ground	Conductor
mm²			mm	kg/km	ohm/km	ohm/km	mH/km	A	kA	kA
3	X	35	56.0	3,000	0.5240	0.668	0.416	175	5.18	2.77
3	X	50	58.0	3,500	0.3870	0.494	0.399	207	7.36	2.92
3	X	70	62.0	4,300	0.2680	0.342	0.380	232	10.26	3.14
3	X	95	66.0	5,200	0.1930	0.247	0.362	302	13.88	3.38
3	X	120	70.0	6,100	0.1530	0.196	0.351	343	17.49	3.57
3	X	150	73.0	7,100	0.1240	0.159	0.343	385	21.81	4.66
3	X	185	77.0	8,200	0.0990	0.128	0.331	435	26.86	3.99
3	X	240	83.0	10,100	0.0750	0.098	0.318	504	34.78	4.31
3	X	300	88.0	12,100	0.0601	0.079	0.309	567	43.41	4.60

*Further information about derating factors for arrangement can be found on supplementary technical information.


NFA2XSY										
PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES					
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor		Inductance	Max. (Amp) Current - Carrying Capacity At 30 °C	Max. Short Circuit Current at 1 Second	
					Max. DC Resistance at 20 °C	Max. AC Resistance at 90 °C			in ground	Conductor
mm²			mm	kg/km	ohm/km	ohm/km	mH/km	A	kA	kA
3	X	50	58.0	2,600	0.641	0.822	0.399	157	4.39	2.92
3	X	70	62.0	3,000	0.443	0.568	0.380	196	6.81	3.14
3	X	95	66.0	3,400	0.320	0.411	0.362	233	9.19	3.38
3	X	120	70.0	3,800	0.253	0.325	0.351	267	11.58	3.57
3	X	150	73.0	4,300	0.206	0.265	0.343	299	14.43	4.66
3	X	185	77.0	4,800	0.164	0.212	0.331	339	17.76	3.99
3	X	240	83.0	5,500	0.125	0.162	0.318	390	22.98	4.31
3	X	300	88.0	6,300	0.100	0.130	0.309	447	28.67	4.60

*Further information about derating factors for arrangement can be found on supplementary technical information.

12/20 (24) kV, NFA2XSY-T

(Aluminium Conductor, XLPE Insulated, Copper Wire Screen, PVC Sheated
+ GSW Messenger)
Standard Specification : SPLN 43-5, SNI IEC 60502-2, IEC 60502-2

**For ID Tape colour can be based on Customer Request or Follow Standard*

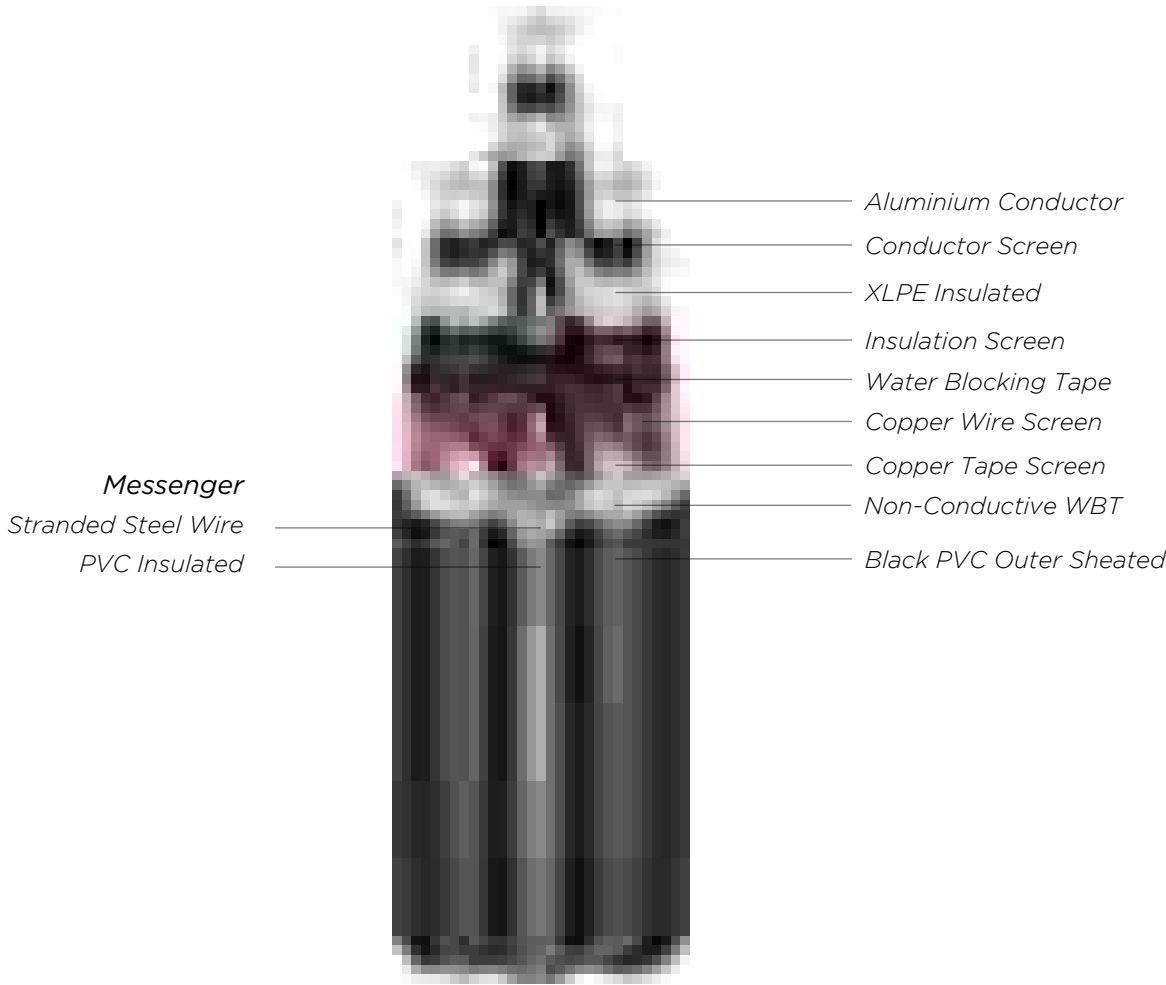

Application

XLPE insulated twisted cables are applied for specially overhead installation

Special Features on Request

- Oil Resistance
- UV Resistance
- Flame Retardant Cat. A, B, C
- Flame Retardant Non Category
- Heat Resistance
- Anti Termite

Note : Conductor Shape

- 35 - 300 sqmm supplied in compacted circular stranded (cm) conductor shape


Standard Packing

- 35 - 95 sqmm supplied in wooden drum @ 1000 meters
- 120 - 300 sqmm supplied in wooden drum on available length
- Length Tolerance per drum ± 2%

PHYSICAL PROPERTIES					ELECTRICAL PROPERTIES				
Nom Cross Section Area			Approx. Overall Diameter	Approx. Cable Weight	Conductor	Inductance	Max. (Amp) Current - Carrying Capacity at 30 °C	Max. Short Circuit Current at 1 Second	
					Max. DC Resistance at 20 °C			Conductor	Screen
mm²			mm	kg/km	ohm/km	mH/km	in air	kA	kA
3 x 35cm / 16	+	95	64.00	3,468	0.868	0.418	142	3.45	2.77
3 x 50cm / 16	+	95	66.00	3,659	0.641	0.400	165	4.89	2.92
3 x 70cm / 16	+	95	70.00	4,036	0.443	0.382	204	6.81	3.14
3 x 95cm / 16	+	95	74.00	4,375	0.320	0.365	247	9.19	3.38
3 x 120cm / 16	+	95	77.00	4,782	0.253	0.354	287	11.58	3.57
3 x 150cm / 25	+	95	80.00	5,395	0.206	0.346	326	14.43	4.66
3 x 185cm / 25	+	95	83.00	5,763	0.164	0.333	373	17.76	3.99
3 x 240cm / 25	+	95	89.00	6,586	0.125	0.323	435	22.98	4.31
3 x 300cm / 25	+	95	93.00	7,620	0.100	0.312	481	28.67	4.60

**Further information about derating factors for arrangement can be found on supplementary technical information.*

HIGH VOLTAGE CABLES

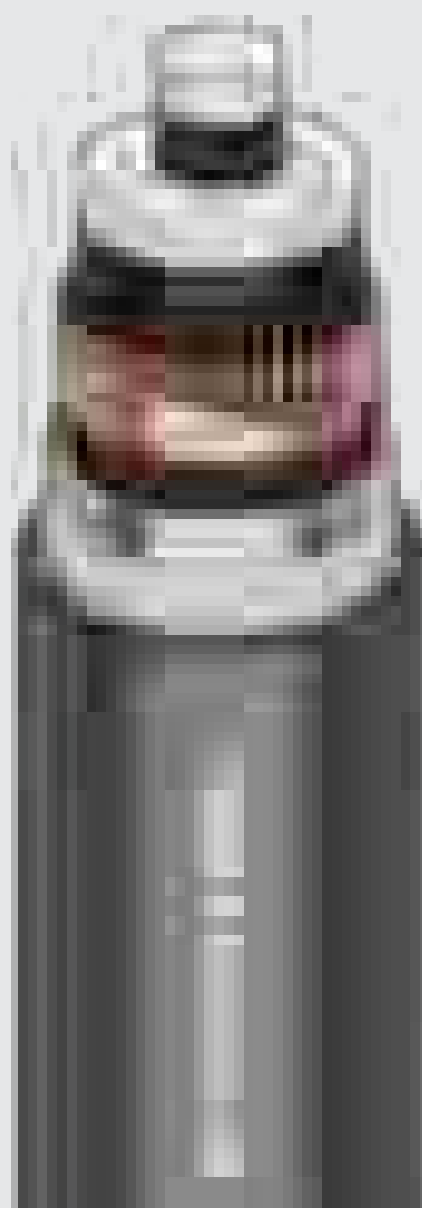


87/150 (170) kV, N2XCK2Y

(Copper Conductor, XLPE Insulated, Copper Wire Screened, Water Sealing, Lead Sheathed, HDPE Sheated)

87/150 (170) kV, NA2XCK2Y


(Aluminium Conductor, XLPE Insulated, Copper Wire Screened, Water Sealing, Lead Sheathed, HDPE Sheated)

N2XCK2Y

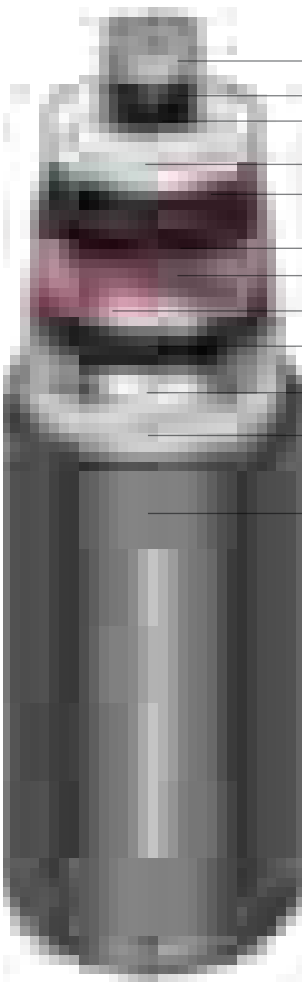

- Copper Conductor
- HT Semiconductive Tape
- Inner Semiconductive
- Super Clean XLPE Insulation
- Outer Semiconductive Compound (Bounded)
- Semiconductive Water Block
- Metalic Copper Wire Screen
- Metalic Copper Tape Screen
- Semiconductive Water Block
- Lead Alloy Metallic Sheath
- Non Conductive Water Block
- PE or PVC Outer Sheath

NA2XCK2Y

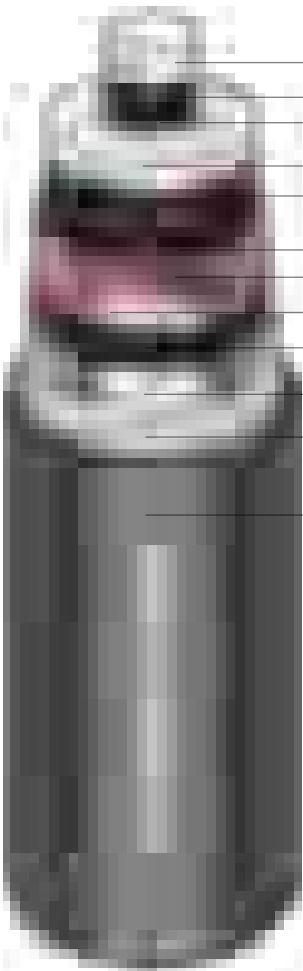

- Aluminium Conductor
- HT Semiconductive Tape
- Inner Semiconductive
- Super Clean XLPE Insulation
- Outer Semiconductive Compound (Bounded)
- Semiconductive Water Block
- Metalic Copper Wire Screen
- Metalic Copper Tape Screen
- Semiconductive Water Block
- Lead Alloy Metallic Sheath
- Non Conductive Water Block
- PE or PVC Outer Sheath

Construction

- Copper / Aluminium Conductor
- HT Semiconductive Tape
- Inner Semiconductive Compound (Bounded)
- Super Clean XLPE Insulation
- Outer Semiconductive Compound (Bounded)
- Semiconductive Water Block
- Metalic Copper Wire Screen
- Metalic Copper Tape Screen
- Semiconductive Water Block
- Lead Alloy Metalic Sheath
- Non Conductive Water Block
- PE or PVC Outer Sheath

Application

Single core High Voltage Cable, Copper or Alumunium Conductor with rated Voltage of 170 kV, Apllies for underground transmission with power frequency of 50-60 Hz.

Instalation

- Max Duration Short Circuit at 5 second, Operating temperature of cable conductor shall not exceed 250° C.
- Minimum bending radius of cable shallnot be smaller than 15 times of actual overall diametre cable.

Standard Specification

IEC 60840

Standard Packing

- Steel Drum, Max. 500 Meter.
- Gross Weight, Max. 20 - 22 Ton each Drum
- Diameter Steel Drum 3.6 meter and Width 2.4 meter

87/150 (170) kV, N2XCK2Y

(Copper Conductor, XLPE Insulated, Copper Wire Screened, Water Sealing, Lead Sheathed, HDPE Sheated)

87/150 (170) kV, NA2XCK2Y

(Aluminium Conductor, XLPE Insulated, Copper Wire Screened, Water Sealing, Lead Sheathed, HDPE Sheated)

PHYSICAL PROPERTIES												
Rating	Size			Conductor Shape	Conductor Diameter	Nominal Insulation	Insulation Diameter	Metalic Screen Diameter	Metalic Sheath Diameter	Approx. Overall Diameter	Approx. Cable Weight	
	mm²			mm	mm	mm	mm	mm	mm	mm	kg/km	
N2XCK2Y	87/150 (170) kV	1	x	300	cm	20.50	19	64.30	71.48	80.28	88.36	16.974
		1	x	400	cm	23.50	19	67.30	74.48	83.08	91.36	17,982
		1	x	500	cm	26.50	19	70.30	77.48	86.08	94.56	19,509
		1	x	630	cm	30.20	19	74.00	81.18	89.78	98.46	21,468
		1	x	800	cm	34.20	19	78.00	85.18	93.58	102.46	23,850
		1	x	1000	4 SG	39.80	19	83.60	90.78	99.18	108.46	26,835
		1	x	1200	4 SG	42.50	19	86.30	93.48	101.88	111.36	28,934
		1	x	1600	5 SG	50.70	19	94.67	101.85	110.25	120.61	35,239
		1	x	2000	5 SG	56.60	19	100.57	107.75	116.15	126.91	40,098
NA2XCK2Y	87/150 (170) kV	1	x	300	cm	20.50	19	64.30	71.48	80.28	88.36	15,129
		1	x	400	cm	23.50	19	67.30	74.48	83.08	91.36	15,633
		1	x	500	cm	26.50	19	70.30	77.48	86.08	94.56	16,507
		1	x	630	cm	30.20	19	74.00	81.18	89.78	98.46	17,603
		1	x	800	cm	34.20	19	78.00	85.18	93.58	102.46	18,628
		1	x	1000	4 SG	39.80	19	83.60	90.78	99.18	108.46	20,320
		1	x	1200	4 SG	42.50	19	86.30	93.48	101.88	111.36	21,329
		1	x	1600	5 SG	50.70	19	94.67	101.85	110.25	120.61	24,430
		1	x	2000	5 SG	56.60	19	100.57	107.75	116.15	126.91	26,717

*Further information about derating factors for arrangement can be found on supplementary technical information.
Deep Off Laying 1.5 m
Soil Thermal Resistivity 1 K.m/W

ELECTRICAL PROPERTIES													
Rating	Size			Max. DC Resistance at 20 °C	Max. AC Resistance at 90 °C	L	X	C	Z	Max. Current - Carrying Capacity at 30 °C	Short Circuit Current at 1 Second		
										In Ground	Cond	Screen	
	mm²			ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	kA/Sec		
N2XCK2Y	87/150 (170) kV	1	x	300	0.0601	0.0779	0.607	0.191	0.150	0.206	580	43	40
		1	x	400	0.0470	0.0616	0.581	0.182	0.163	0.193	654	57	40
		1	x	500	0.0336	0.0451	0.559	0.176	0.176	0.181	766	72	40
		1	x	630	0.0283	0.0389	0.536	0.168	0.192	0.173	828	90	40
		1	x	800	0.0221	0.0317	0.515	0.162	0.209	0.165	919	114	40
		1	x	1000	0.0176	0.0268	0.491						

87/150 (170) kV, Cu/XLPE/CWS/CAA/HDPE

(Copper Conductor, XLPE Insulation, Copper Wire Screen, Water Sealing, Continuous Welded Corrugated Aluminium Armour and HDPE Sheathed)

87/150 (170) kV, Al/XLPE/CWS/CAA/HDPE

(Aluminium Conductor, XLPE Insulation, Copper Wire Screen, Water Sealing, Continuous Welded Corrugated Aluminium Armour and HDPE Sheathed)



Construction

- Copper / Aluminium Conductor
- HT Semiconductive Tape
- Inner Semiconductive Compound (Bounded)
- Super Clean XLPE Insulation
- Outer Semiconductive Compound (Bounded)
- Semiconductive Water Block
- Metalic Copper Wire Screen
- Metalic Copper Tape Screen
- Semiconductive Water Block
- Corrugated Aluminium Armour
- Non Conductive Water Block
- PE or PVC Outer Sheath

Application

Single core High Voltage Cable, Copper or Alumunium Conductor with rated Voltage of 170 kV, Apllies for underground transmission with power frequency of 50-60 Hz.

Instalation

- Max Duration Short Circuit at 5 second, Operating temperature of cable conductor shall not exceed 250° C.
- Minimum bending radius of cable shallnot be smaller than 15 times of actual overall diametre cable.

Standard Specification

IEC 60840

Standard Packing

- Steel Drum, Max. 500 Meter.
- Gross Weight, Max. 20 - 22 Ton each Drum
- Diameter Steel Drum 3.6 meter and Width 2.4 meter

87/150 (170) kV, Cu/XLPE/CWS/CAA/HDPE

(Copper Conductor, XLPE Insulation, Copper Wire Screen, Water Sealing, Continuous Welded Corrugated Aluminium Armour and HDPE Sheathed)

87/150 (170) kV, Al/XLPE/CWS/CAA/HDPE

(Aluminium Conductor, XLPE Insulation, Copper Wire Screen, Water Sealing, Continuous Welded Corrugated Aluminium Armour and HDPE Sheathed)

PHYSICAL PROPERTIES												
Rating	Size			Conductor Shape	Conductor Diameter	Nominal Insulation	Insulation Diameter	Metalic Screen Diameter	Metalic Sheath Diameter	Approx. Overall Diameter	Approx. Cable Weight	
	mm²			mm	mm	mm	mm	mm	mm	mm	kg/km	
Cu/XLPE/CWS/CAA/HDPE	87/150 (170) kV	1	x	300	cm	20.50	19.00	64.30	71.48	88.00	96.56	11115
		1	x	400	cm	23.50	19.00	68.18	75.36	92.80	101.76	13066
		1	x	500	cm	26.50	19.00	71.18	78.36	95.80	104.76	14274
		1	x	630	cm	30.20	19.00	74.88	82.06	99.30	108.66	15947
		1	x	800	cm	34.20	19.00	78.88	86.06	107.50	117.06	18171
		1	x	1000	4 SG	39.80	19.00	83.80	95.46	117.50	127.66	21647
		1	x	1200	4 SG	42.50	19.00	86.50	98.16	120.00	130.36	23510
		1	x	1600	5 SG	48.60	19.00	93.60	105.46	127.50	139.02	28758
		1	x	2000	5 SG	54.50	19.00	99.50	111.36	134.30	146.22	33755
Al/XLPE/CWS/CAA/HDPE	87/150 (170) kV	1	x	300	cm	20.50	19.00	64.30	71.48	88.00	96.56	9265
		1	x	400	cm	23.50	19.00	67.30	74.48	92.80	101.76	10709
		1	x	500	cm	26.50	19.00	70.30	77.48	95.80	104.76	11263
		1	x	630	cm	30.20	19.00	74.00	81.18	99.30	108.66	12070
		1	x	800	cm	34.20	19.00	78.00	85.18	107.50	117.06	13183
		1	x	1000	4 SG	39.80	19.00	83.80	95.46	117.50	127.66	15110
		1	x	1200	4 SG	42.50	19.00	86.50	98.16	120.00	130.36	15881
		1	x	1600	5 SG	48.60	19.00	93.60	105.46	127.50	139.02	18443
		1	x	2000	5 SG	54.50	19.00	99.50	111.36	134.30	146.22	20835


*Further information about derating factors for arrangement can be found on supplementary technical information.
Deep Off Laying 1.5 m
Soil Thermal Resistivity 1 K.m/W

ELECTRICAL PROPERTIES													
Rating	Size			Max. DC Resistance at 20 °C	Max. AC Resistance at 90 °C	L	X	C	Z	Max. Current - Carrying Capacity at 30 °C	Short Circuit Current at 1 Second		
										In Ground	Cond	Screen	
	mm²			ohm/km	ohm/km	mH/km	ohm/km	µF/km	ohm/km	A	kA/Sec		
Cu/XLPE/CWS/CAA/HDPE	87/150 (170) kV	1	x	300	0.0601	0.0777	0.691	0.2171	0.14	0.165	634	43	29
		1	x	400	0.047	0.0614	0.666	0.209	0.16	0.148	728	57	29
		1	x	500	0.0366	0.0485	0.649	0.2038	0.17	0.135	828	72	29
		1	x	630	0.0283	0.0384	0.635	0.200	0.18	0.125	946	90	29
		1	x	800	0.0221	0.0311	0.618	0.1943	0.20	0.118	1062		

Installation Guide

CURRENT CARRYING CAPACITY

The Current Ratings Are Designed With The Following Conditions :
One Circuit Of Three Phase Load.

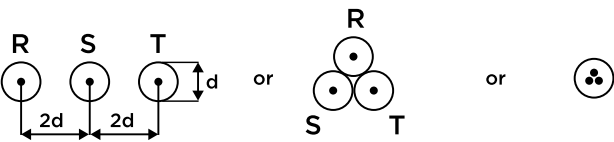

Maximum operating temperature :

- PVC insulation: 70°C
 - XLPE insulation: 90°C
- No other heat sources installed near the group of cables

Cable laying :

- In Ground :**
- Soil temperature : 30°C
 - Depth of laying : 70 cm
 - Soil thermal resistivity : 100°C.cm/Watt

- In Air :**
- Ambient temperature : 30°C
 - The cable must be protected from solar radiation and should have a large enough space so that heat generated from the loaded cable can be wasted perfectly.

Note :
If the actual installation conditions differ from the ones mentioned above, the current ratings should be multiplied by the appropriate derating factors shown in the tables on the next pages.

DERATING FACTORS

A. GROUPING IN GROUND

1. GROUND TEMPERATURE

	GROUND TEMPERATURES (°C)						
	20	25	30	35	40	45	50
XLPE INSULATION	1.00	0.96	0.93	0.89	0.85	0.8	0.76
PVC INSULATION	1.00	0.95	0.89	0.84	0.77	0.71	0.63


2. SOIL THERMAL RESISTIVITY

	SOIL THERMAL RESISTIVITY (°C.cm/Watt)			
	80	100	150	250
XLPE INSULATION	1.30	1.19	1.00	0.78
PVC INSULATION	1.28	1.17	1.00	0.70

3. DEPTH OF LAYING

	DEPTH OF LAYING (cm)					
	50	80	100	125	150	200
XLPE INSULATION	1.04	1.00	0.98	0.96	0.93	0.90
PVC INSULATION	1.01	1.00	0.99	0.98	0.96	0.94


4. MULTICORE CABLE



	NUMBER OF GROUPING							
	1	2	3	4	5	6	8	10
XLPE INSULATION	1.00	0.86	0.76	0.71	0.67	0.64	0.60	0.57
PVC INSULATION	1.00	0.85	0.75	0.68	0.64	0.60	0.56	0.53


5. SINGLE CORE CABLE

A. TREFOIL FORMATION



	NUMBER OF GROUPING							
	1	2	3	4	5	6	8	10
XLPE INSULATION	1.00	0.89	0.82	0.75	0.75	0.73	0.70	0.68
PVC INSULATION	1.00	0.90	0.82	0.79	0.76	0.74	0.71	0.69

B. FLAT INFORMATION



	NUMBER OF GROUPING							
	1	2	3	4	5	6	8	10
XLPE INSULATION	1.00	0.87	0.77	0.73	0.70	0.68	0.65	0.63
PVC INSULATION	1.00	0.87	0.78	0.74	0.70	0.68	0.65	0.63

B. GROUPING IN AIR

1. AIR TEMPERATURE


	AIR TEMPERATURES (°C)						
	20	25	30	35	40	45	50
XLPE INSULATION	1,08	1,04	1,00	0,96	0,91	0,87	0,82
PVC INSULATION	1,12	1,06	1,00	0,94	0,87	0,79	0,71

2. SINGLE CORE CABLE IN THREE PHASE SYSTEM

a. Flat Formation


- Minimum Distance From The Wall : 2.0 cm
- Clearance Between System = Cable Diameter (d)

Laid on the ground

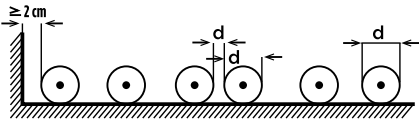


NUMBER OF SYSTEM		
1	2	3
DERATING FACTOR		
0,92	0,89	0,88

Laid on rack

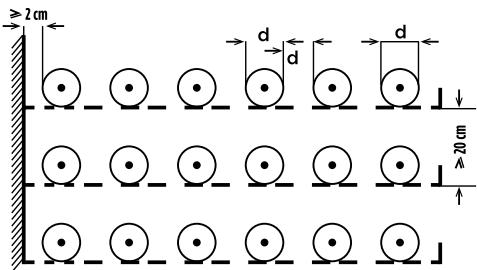


NUMBER OF TROUGH	NUMBER OF SYSTEM		
	1	2	3
DERATING FACTOR			
1	1,00	0,97	0,96
2	0,97	0,94	0,93
3	0,96	0,93	0,92
6	0,94	0,91	0,90

Laid on trough (air circulation restricted)

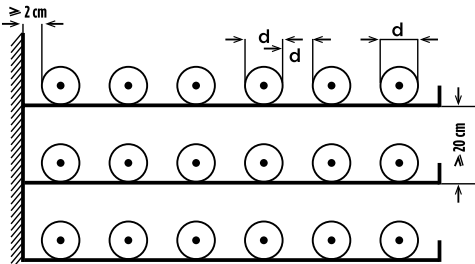


NUMBER OF TROUGH	NUMBER OF SYSTEM		
	1	2	3
DERATING FACTOR			
1	0,92	0,89	0,88
2	0,87	0,84	0,83
3	0,84	0,82	0,81
6	0,82	0,80	0,79

Arranged on structures or on the wall



NUMBER OF SYSTEM		
1	2	3
DERATING FACTOR		
0,94	0,91	0,89




NUMBER OF SYSTEM		
1	2	3
DERATING FACTOR		
0,89	0,86	0,84

b. Trefoil Formation


- Minimum distance from the wall: 2.0 cm
- Clearance between system = 2x cable diameter (2d)

Laid on ground

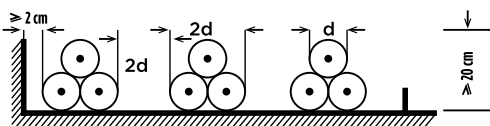


NUMBER OF SYSTEM		
1	2	3
DERATING FACTOR		
0,95	0,90	0,88

Laid on rack

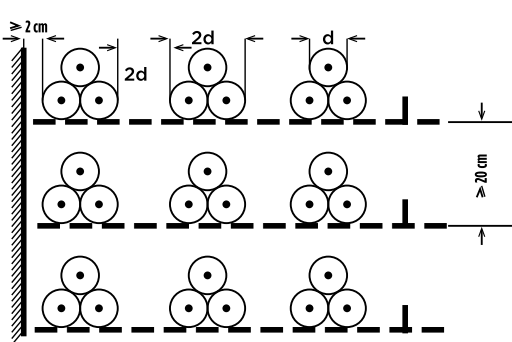

NUMBER OF TROUGH	NUMBER OF SYSTEM		
	1	2	3
DERATING FACTOR			
1	1,00	0,98	0,96
2	1,00	0,95	0,93
3	1,00	0,94	0,92
6	1,00	0,93	0,90


Laid on trough (air circulation restricted)

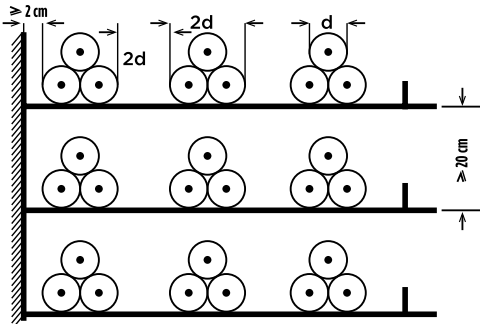

NUMBER OF TROUGH	NUMBER OF SYSTEM		
	1	2	3
DERATING FACTOR			
1	0,95	0,90	0,88
2	0,90	0,85	0,83
3	0,88	0,83	0,81
6	0,86	0,81	0,79

Arrangement without reducing current rating (for all systems)

- Minimum distance from the wall: 2.0 Cm
- Clearance between cables = 4x cable diameter (4d)

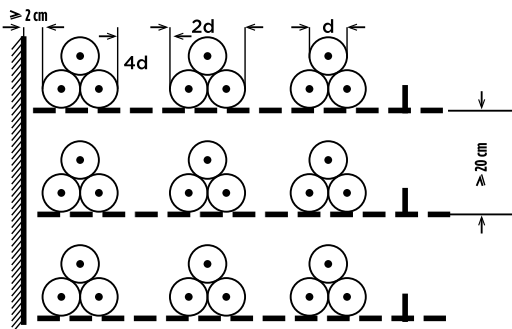


3. MULTICORE CABLE IN THREE PHASE SYSTEM AND SINGLE CORE CABLE IN DC SYSTEM

a. Flat formation


- Minimum Distance From The Wall : 2.0 cm
- Clearance Between System = Cable Diameter (d)

Laid on the ground




NUMBER OF SYSTEM				
1	2	3	6	9
DERATING FACTOR				
0,95	0,90	0,88	0,85	0,84

Laid on rack




NUMBER OF TROUGH	NUMBER OF SYSTEM				
	1	2	3	6	9
DERATING FACTOR					
1	1,00	0,98	0,96	0,93	0,92
2	1,00	0,95	0,93	0,90	0,89
3	1,00	0,94	0,92	0,89	0,88
6	1,00	0,93	0,90	0,87	0,86

Laid on trough (air circulation restricted)



NUMBER OF TROUGH	NUMBER OF SYSTEM				
	1	2	3	6	9
DERATING FACTOR					
1	0,95	0,90	0,88	0,85	0,84
2	0,90	0,85	0,83	0,81	0,80
3	0,88	0,83	0,81	0,79	0,78
6	0,86	0,81	0,79	0,77	0,76


Arranged on structures or on the wall



NUMBER OF SYSTEM				
1	2	3	6	9
DERATING FACTOR				
1,00	0,93	0,90	0,87	0,86


Arrangement without reducing current rating (for any number of cables)

- Minimum distance from the wall: 2.0 Cm
- Clearance between cables = 2x cable diameter (2d)




b. Cables Touching Throughout and in Contact with the Wall

Laid on the ground




NUMBER OF SYSTEM				
1	2	3	6	9
DERATING FACTOR				
0,90	0,84	0,80	0,75	0,73

Laid on rack

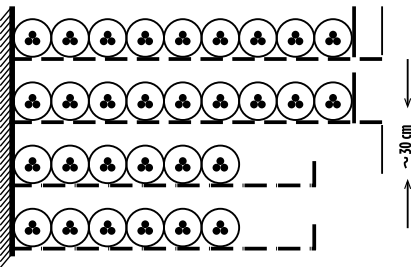

NUMBER OF TROUGH	NUMBER OF SYSTEM				
	1	2	3	6	9
DERATING FACTOR					
1	0,95	0,84	0,80	0,75	0,73
2	0,95	0,80	0,76	0,71	0,69
3	0,95	0,78	0,74	0,70	0,68
6	0,95	0,76	0,72	0,68	0,66

Laid on trough (air circulation restricted)

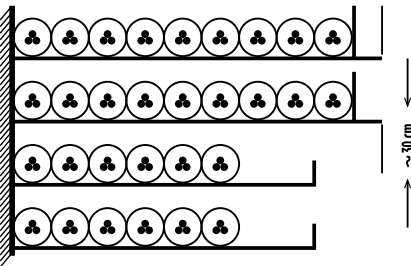


NUMBER OF TROUGH	NUMBER OF SYSTEM				
	1	2	3	6	9
DERATING FACTOR					
1	0,95	0,84	0,80	0,75	0,73
2	0,95	0,80	0,76	0,71	0,69
3	0,95	0,78	0,74	0,70	0,68
6	0,95	0,76	0,72	0,68	0,66

Arranged on structures or on the wall



NUMBER OF SYSTEM				
1	2	3	6	9
DERATING FACTOR				
0,95	0,78	0,73	0,68	0,66



PT Sutrakabel Intimandiri
Raya Bogor KM 49
Jl Roda Pembangunan No 5
Ds Cimandala Kec Sukaraja Kab Bogor 16710
Ph. 021 875 3735
Fax. 021 875 3736
Email : marketing@sutrakabel.com

www.sutrakabel.com

 SPLN  ISO 9001 ISO 14001 ISO 45001